

 日嘉卫生金属(嘉兴)有限公司
RI JIA SANITARY METAL(JIAXING)CO.,LTD.

地址：浙江省平湖市当湖西路 421 号

电话：0573-8515-6133

传真：0573-8515-6166

Add: No.421, Donghu West Road, Pinghu, Zhejiang, China

Tel: 0573-8515-6133

Fax: 0573-8515-6166

 大阪卫生株式会社

日本总部工厂
〒566-0052 大阪府摄津市鸟饲本町 1 丁目 7-46
TEL: 072-654-1661(代表) FAX: 072-654-1661

新大阪事务所
〒532-0011 大阪府大阪市淀川区西中岛 3 丁目 8-21 新大阪公园侧面大楼
TEL: 06-6886-6611(代表) FAX: 06-6886-6615

东京支店
〒135-0042 东京都江东区木场 5-11-13 木场公园大楼 5F
TEL: 03-3643-6611(代表) FAX: 03-3643-6535



请从这里查看最新的产品指南。
Please check the latest product guide from here.

 日嘉卫生金属(嘉兴)有限公司

RI JIA SANITARY METAL(JIAXING)CO.,LTD.

 日嘉 RI JIA
卫生金属 SANITARY METAL

PRODUCT GUIDE
TYPE C
产品目录



日嘉 RI JIA

公司简介

Company Profile

日嘉卫生金属(嘉兴)有限公司成立于2005年,是由大阪卫生株式会社(OSAKA SANITARY CO.,LTD)在中国浙江省100%出资设立的子公司。

卫生级产品是食品、饮料生产中不可或缺的产品,担任着链接安全和健康的重要作用。我们「日嘉卫生金属」怀着感恩之心,以开发人性化的产品和研究环境友好型技术为重任。在有限的自然环境中,开发生产各种各样的产品。为满足客户的需求,我们可按照3A、ASME、SMS、等世界各国的产品标准来提供产品。

我们始终如一地坚持贯彻日资企业的标准,为客户提供更加优质一流的服务和产品。同时也发挥中国制造产品的性价比优势,致力于为客户提供最具性价比的产品而努力。

Rijia Sanitary Metals (Jiaxing) Co., Ltd. established in 2005, is a 100% funded subsidiary of Osaka Sanitary Co., Ltd. in Zhejiang Province, China.

The Sanitary products are indispensable products in food and beverage production, which play an important role in involving safety and health. We are engaged in developing humanized products and environment-friendly technology with thankful heart. In the limited natural environment, develop and produce a variety of products. In order to satisfy the needs of customers, we can provide products in accordance with 3A, ASME, SMS, and other world standards.

We consistently stick to the standards of Japanese funded enterprises to provide customers with more quality first-class services and products. Meanwhile, we also give full play to the cost-effective advantages of Made-in-China products, and strive to provide customers with the most cost-effective products.

FITTINGS 管件类

01

VALVES 阀门类

02

ACCESSORIES 配件类

03

PLANT ENGINEERING 案例介绍

04

手动蝶阀
Manual for Butterfly Valve




特殊客制 气动 / 手动阀门
OEM Pneumatic / Manual Valve



卡箍接头 / 油封 / 管吊架
Clamp Unions / Seal / Tubing Hanger




各种油任 / 油封
Unions 3A,DIN,SMS,RJT,BS,AS.../ Seal

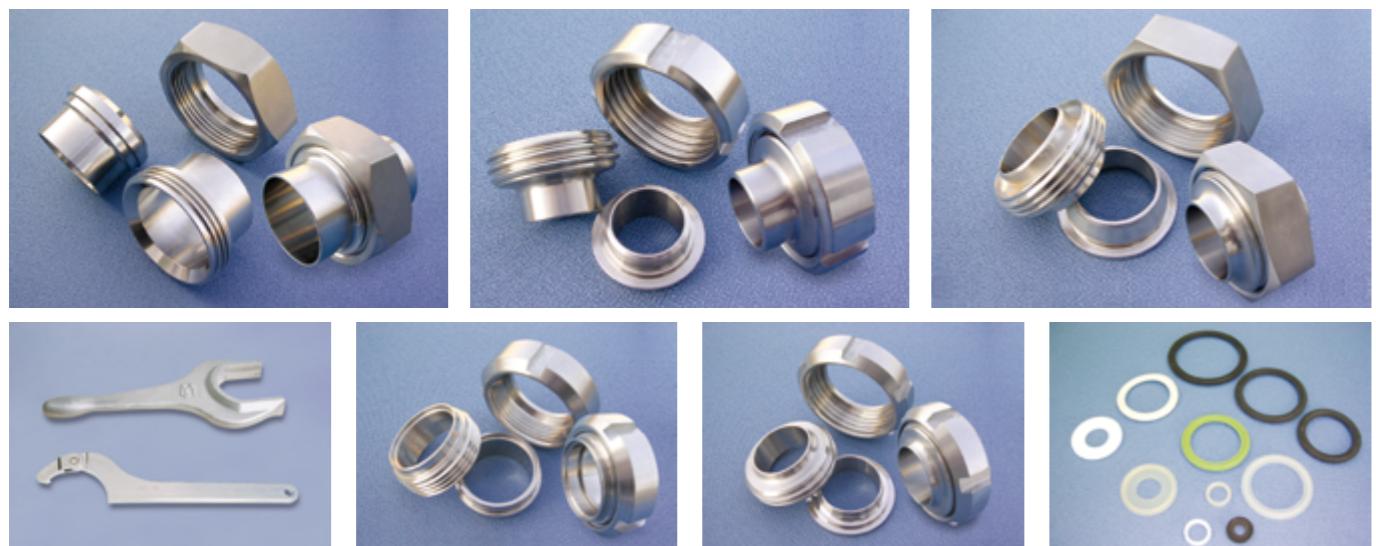

喷球 / 人孔盖
Spray Ball / Tank Covers



压力表 / 温度表 / 过滤器
Pressure Gage / Temperature / Filter

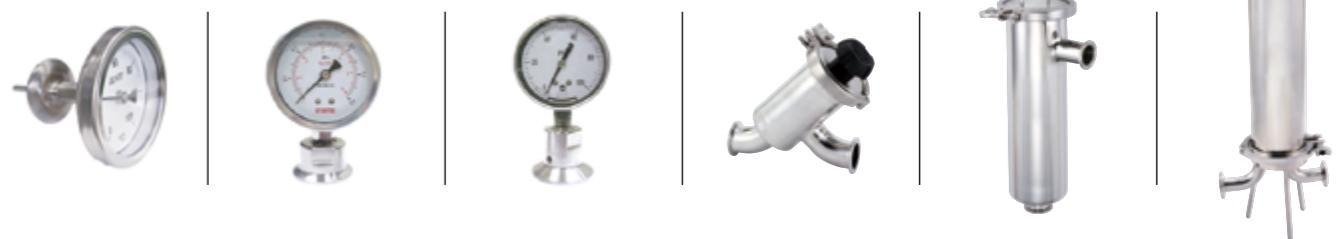

取样阀
Sample Valve



工业球阀
Industrial Ball Valve



管件类 FITTINGS

卫生级零组件, 配件类 Sanitary Components, Fittings

重型卡箍	010
Heavy Duty Clamp-Rings	
13MHH 重型单铆钉卡箍	010
13MH Heavy Duty Single Pin Clamp	
13SF 重型双铆钉卡箍	011
13SF Heavy Duty Double Pin Clamp	
13MHHM 重型双铆钉卡箍	011
13MHMH Double Pin Clamp	
13MHP 高压卡箍	011
13MHP High Pressure Bolted Clamp	
13MHHS 3 片式卡箍	012
13MHHS 3 Pieces Clamp	
13CS 双铆钉卡箍	012
13CS Double Pin Clamp	
13I I-LINE 卡箍	012
13I-Line Clamp	
卡盘零部件	013
Ferrule Adapters	
3A/SMS 焊式卡盘	013
3A/SMS Welding Ferrule	
DIN 焊式卡盘	013
DIN Welding Ferrule	
ISO(REP) 焊式卡盘	014
ISO(REP) Welding Ferrule	
ISO-2852 焊式卡盘	014
ISO-2852 Welding Ferrule	
卡盘垫片	015
13PG Ferrule Gasket (EPDM, SILICONE, VITON, PTFE)	
复合垫片 13PG (EPDM+PTFE)	016
Imperial 13PG(EPDM+PTFE)	
法兰型 13FG	016
Flange Type 13FG	
盲板	017
Blank	
14WHR 软管接头	018
14WHR Hose Adapter	
14MPHR 软管接头	018
14MPHR Hose Adapter	
21MP 卡盘螺纹接头	019
21MP Ferrule/Threads Adapter	
22MP 卡盘螺纹接头	019
22MP Ferrule/Threads Adapter	
管支架	020
Tubing Hangers	
TH-1	020
TH-1	
TH-2	021
TH-2	
TH-3(六角形) 管支架	021
TH-3(Hexagon)	
DIN 11851 油任	022
DIN 11851 Unions	
DIN 圆形螺母	022
DIN-13 Round Nut	
DIN-14DA/DB 平接头	022
DIN-14DA/DB Welding Liner	
DIN-15DA/DB 外螺纹接头	023
DIN-15DA/DB Welding Male	
DIN 垫圈 (EPDM, SILICONE, VITON(FKM))	023
DIN Seal Ring(EPDM, SILICONE, VITON(FKM))	
DIN-151 英制外螺纹	023
DIN-151 Imperial Welding Male	
DIN-141 英制平接头	024
DIN-141 Imperial Welding Liner	
SMS 油任	024
SMS Unions	
SMS-13R 6 沟螺母	024
SMS-13R Nut 6 Slots	
SMS-13RBN 盲盖螺母	024
SMS-13RBN Round Blank Nut	
SMS-14 长型平接头	025
SMS-14 Long Welding Liner	
SMS-15 长型外螺纹接头	025
SMS-15 Long Welding Male	
SMS-14S 短型平接头	025
SMS-14S Short Welding Liner	
SMS-15S 短型平接头	026
SMS-15S Short Welding Male	
SMS-14B 盲盖	026
SMS-14B Blank End Cap	
SMS- 基圈 L 型 (EPDM, SILICONE, VITON(FKM))	026
Seal Ring L Type(EPDM, SILICONE, VITON(FKM))	

SA.SMS.DIN.BS.AS 管线 / 弯头 / 三通 / 大小头

SA.SMS.DIN.BS.AS Tube Line / Elbow / Tee / Reducer	
不锈钢管件	028
Wide Range Tube Line	
3A 管件	030
3A Tubular Items	
2WK 45 度短弯头	030
2WK Short 45° Elbow	
L2KS 45 度长弯头	030
L2KS Long 45° Elbow	
2WCL 90 度短弯头	031
2WCL Short Weld 90° Elbow	
L2S 90 度长弯头	031
L2S Long Weld 90° Elbow	
7WWW 短三通	032
7WWW Short Equal Weld Tee	
7W 长三通	032
7W Long Equal Weld Tee	
7RW 变径长三通	033
7RW Long Reducing Weld Tee	
7RWS 变径短三通	033
7RWS Short Reducing Weld Tee	
7WWO 等径平口短三通	034
7WWO Short Equal Pull Without Straight Weld Tee	
7WO 等径平口长三通	034
7WO Short Equal Pull Without Straight Weld Tee	
7RWOO 变径平口短三通	035
7RWOO Short Reducing Pull Without Straight Weld Tee	
7RWO 变径平口长三通	035
7RWO Long Reducing Pull Without Straight Weld Tee	
2KMP 45 度短夹弯头	036
2KMP Tri-Clamp 45° Elbow	
2KMP 90 度短夹弯头	036
2KMP Tri-Clamp 90° Elbow	
7MP 等径夹三通	036
7MP Tri-Clamp Equal Tee	
9WWW 短十字通	037
9WWW Short Equal Weld Cross	
9W 长十字通	037
9W Long Equal Weld Cross	
9MP 夹式长十字通	037
9MP Clamp Long Cross	
C.L31 同心大小头 (加长型)	038
C.L31 Concentric Reducer (Long)	
C.L31 偏心大小头 (加长型)	039
C.L31 Eccentric Reducer (Long)	
短型大小头	040
Weld Reduce	
夹式大小头	041
Tri-Clamp Reducer	
SMS 管件	042
SMS (ISO 2037)Tubular Items	
L2KS1D 45 度长弯头	042
L2KS1D Long 45° Elbow	
2WCL 90 度短弯头	042
2WCL Short 90° Elbow	
L2S1D 90 度长弯头	042
L2S1D Long 90° Elbow	
SMS 7W 等径长三通	043
SMS 7W Tee With Straight-End	
SMS 7WO 等径平口三通	043
SMS 7WO Tee Without Straight-End	
SMS 9WO 等径平口四通	043
SMS 9WO Welding Cross Without Straight-End	
SMS 变径长三通	044
SMS Long Reducing Weld Tee	
7RWO 变径平口三通	045
7RWO Welding Tee Without Straight-End	
SMS 单卡 U 型三通 /SMS 短直部 U 型三通	045
SMS U-Tee ends Weld/Ferrule/Weld SMS U-Tee Weld/Ferrule/Weld(Short Straight Part)	
SMS 短出口单卡异径三通	046
SMS Reducing Tee ends Weld/Ferrule/Weld(Low neck)	
SMS 短出口单卡等径三通	046
SMS Tee ends Weld/Ferrule/Weld	
SMS 小大头	047
SMS (ISO 2037)Tubular Items	
SMS L31 同心平口大小头	047
Weld Reduce	
SMS L31SE 短同心大小头	047
Weld Reducer	
SMS L32 偏心平口大小头	047
Weld Reducer	
SMS L32SE 短偏心大小头	047
Weld Reducer	
SMS 同心大小头 (加长型)	048
SMS Concentric Reducers(Long)	
SMS 偏心大小头 (加长型)	048
SMS Eccentric Reducers(Long)	

BPE 管件与配件

BPE Pharmaceutical Fittings	
高洁净管道和管径 (ASME BPE 标准)	050
High Purity Tube & Fitting Valve (ASME BPE Standard)	
BPE 不锈钢管	052
BPE Stainless Steel Tubing	
BPE 管件	053
BPE Fittings	
90 度长弯头	053
DT-4.1.1-1 Long Weld 90° Elbow (DT-7)	
45 度长弯头	053
DT-4.1.1-4 Long 45° Elbow (DT-8)	
四通	054
DT-4.1.2-1C Cross (DT-9)	
等径三通	054
DT-4.1.2-1T Tee (DT-9)	
同心大小头	055
DT-4.1.3-1 Concentric Reducer (DT11)	
偏心大小头	056
DT-4.1.3-1 Eccentric Reducer (DT11)	
90 度单夹弯头	057
DT-4.1.1-2 90° Clamp/Weld Elbow (DT-12)	
45 度单夹弯头	057
DT-4.1.1-5 45° Clamp/Weld Elbow (DT-13)	
90 度夹式弯头	057
DT-4.1.1-3 90° Clamp Elbow (DT-16)	
45 度夹式弯头	058
DT-4.1.1-6 45° Clamp Elbow (DT-17)	
变径三通	058
DT-4.1.2-6 Reducing Tee (DT-10)	
短出口单夹变径三通	059
DT-4.1.2-7 Short Outlet W/C Reducing Tee (DT-14)	
短出口单夹对等三通	060
DT-4.1.2-2 Equal Outlet Weld/Clamp Tee (DT-15)	
夹式对等三通	060
DT-4.1.2-4T Clamp Tee (DT-18)	
夹式四通	060
DT-4.1.2-4C Clamp Cross (DT-18)	
变径夹三通	061
DT-4.1.2-8 Reducing Tee Clamp End (DT-19)	
短出口夹式变径三通	062
DT-4.1.2-9 Reducing Tee Clamp End (DT-20)	
夹式同心大小头	063
DT-4.1.3-3 Clamp Concentric Reducer (DT-21)	
夹式偏心大小头	064
DT-4.1.3-3 Clamp Eccentric Reducer (DT-21)	
卡箍式平接头	065
DT-4.1.4-1 Weld Ferrule (DT-22)	
单卡 U 型三通 / 短直部 U 型三通	066
U-Tee ends Weld/Ferrule/Weld U-Tee Weld/Ferrule/Weld(Short Straight Part)	
短出口单卡三通	066
DT-4.1.2-3 Short Outlet Run Weld/Clamp Tee (DT-25)	
夹式短出口等径三通	066
DT-4.1.2-5 Short Outlet Tee Clamp End (DT-27)	
单夹同心大小头	067
DT-4.1.3-2AC Concentric Reducer (DT-26)	
单夹偏心大小头	067
DT-4.1.3-2AE Eccentric Reducer (DT-26)	
短出口焊式 (DT28) / 仪表三通 (DT29)	068
Instrument Tee Weld/Clamp End	
管帽	069
DT-4.1.5-1 Automatic Tube Weld (DT-30)	
盲板	069
DT-4.1.5-2 Solid End Cap Hygienic Clamp Joine(DT-31)	
阀门类 VALVES	
卫生级阀门 Sanitary Valves	
手动换向阀	072
Manual Divert Valves	
手动控制桶底阀	075
Manual Control Tank Valves	
蝶阀	076
Butterfly Valves	
夹式蝶阀	078
Full Forged Butterfly Valve	
焊式蝶阀	078
Full Weld Butterfly Valve	
止回阀	079
Non Return Valves (Check Valves)	
焊式止回阀	081
Check Valve Middle Clamp Type / Weld End	
夹式止回阀	081
Check Valve Middle Clamp Type / Clamp End	
卫生级全包球阀 (适用于制药与食品)	082
Ball Valves For Food And BPE Use With ISO	
Mount Plate Weld/Male/Clamp End-filled Cavity Seat	
卫生级全包球阀 (适用于食品化工与真空行业)	084
Sanitary-Ball Valves For Food Chemical, and Vacuum Use.	
With ISO Mount Plate Weld/Male End	
手动 3 通球阀	084
Manual Ball Valve, 3-way	
取样阀	085
Sample Cock Valves	
测试阀	085
Test Valve	
A-Type 取样阀	085
A-Type Sample Cock Valve	
C-Type 取样阀	086
C-Type Sample Cock Valve	
D-Type 取样阀	087
D-Type Sample Cock Valve	
F-Type 取样阀	087
F-Type Sample Cock Valve	
隔膜取样阀	087
Diaphragm Sample Valve	
BPE 卫生取样阀	088
Hygienic Sample Valves for BPE	
BPE 卫生取样阀 (螺纹)	089
Hygienic Sample Valve for BPE (Weld)	
BPE 卫生取样阀 (卡箍)	089
Hygienic Sample Valve for BPE (Clamp)	
隔膜阀	090
Diaphragm Valves	
手动两通隔膜阀	092
Manual Diaphragm Valve 2 WAY	
桶底阀	092
Tank Bottom Valve	
手动 3 通隔膜阀 T 型	093
Manual Diaphragm Valve T-Type 3 WAY	
手动隔膜 3 通 /U 型阀	094
Manual Diaphragm Valve 3 WAY/U-Bend Valve	
其它阀	095
Other Valves	
2 通和 3 通考克	095
2 WAY & 3 WAY Plug Valve	
四通阀	095
Four-way Valve	
特殊阀的种类	096
Kinds of Special Valves	
泄压阀	096
Relief Valve	
排气阀	096
Air Release Valve	
放空阀	096
Air Blow Valve	
配件类 ACCESSORIES	
高洁净视镜	098
Hygienic Sight Glasses	
夹式视镜	099
3A/BS Clamp End Sight Glass	
焊式视镜	099
3A/BS Weld End Sight Glass	
过滤器	100
S-Trainers</	



QA:0410091424



BPE-122

FITTINGS 管件类

卫生级
零组件，配件类


Sanitary
Components, Fittings



日嘉卫生金属(嘉兴)有限公司
RI JIA SANITARY METAL(JIAXING)CO.,LTD.

重型卡箍

Heavy Duty Clamp-Rings

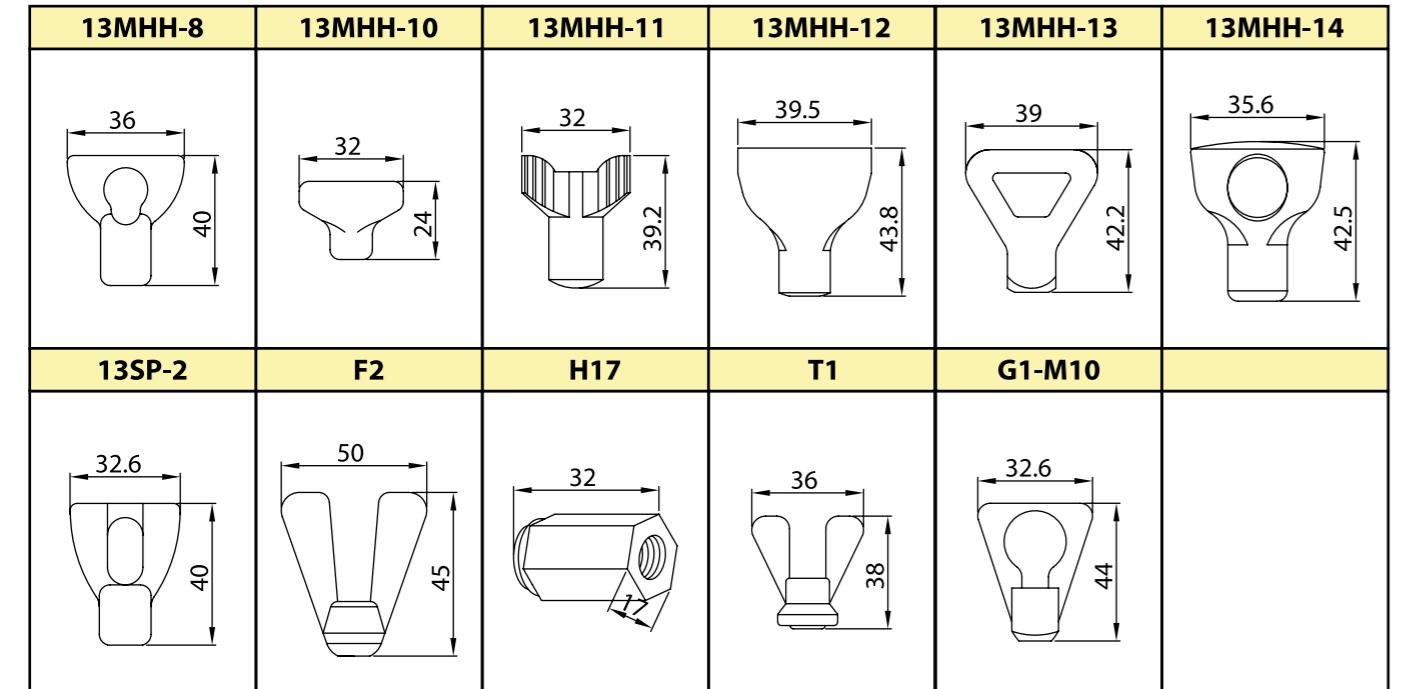


13MHH 重型单铆钉卡箍

13MHH Heavy Duty Single Pin Clamp




1/2"~3/4"

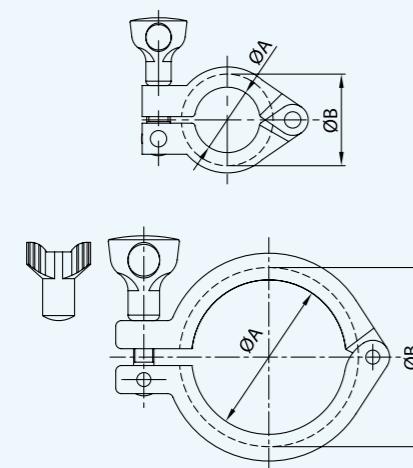

SIZE	ØA	ØB
1/2"~3/4"	21.2	28.2
A37	27.8	37
1"~1.5"	42	53.6
2"	55.4	67
2.5"	69	80.6
3"	82.6	94.2
3.5"	97.6	109.2
4"	110.6	122.2
4.5"	121.6	133.2
6"	156.2	170.4
8"	205.8	220


重型卡箍

Heavy Duty Clamp-Rings

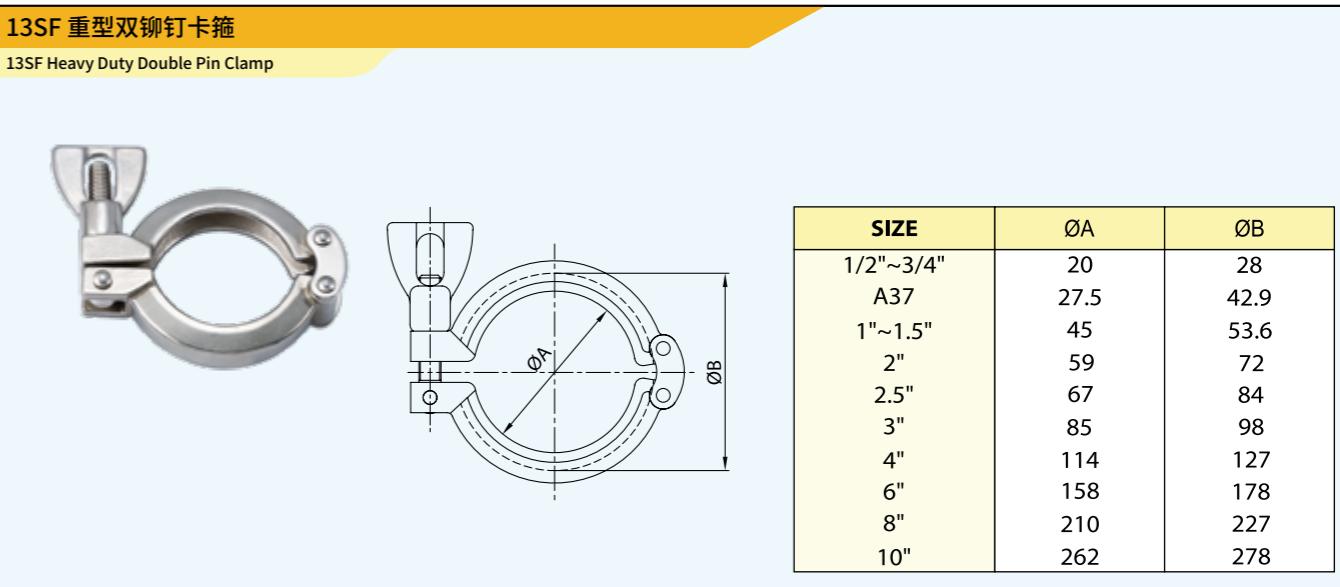

13MHHM 重型双铆钉卡箍


13MHHM Double Pin Clamp

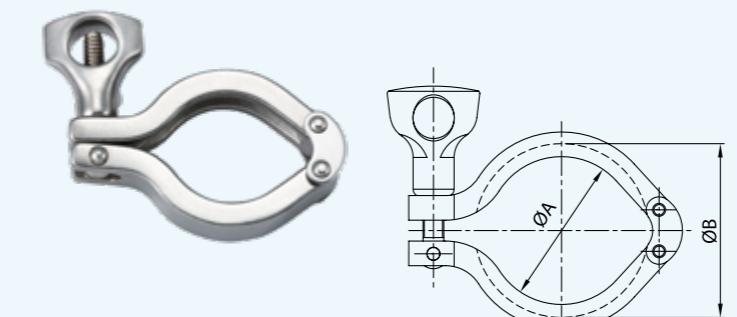

SIZE	ØA	ØB
1/2"~3/4"	20	28
A37	28	38
1"~1.5"	43.6	53.6
2"	57	67
2.5"	70.6	80.6
3"	84	94
4"	112	122
6"	155	170
8"	205	220.8

13MHP 高压卡箍

13MHP High Pressure Bolted Clamp

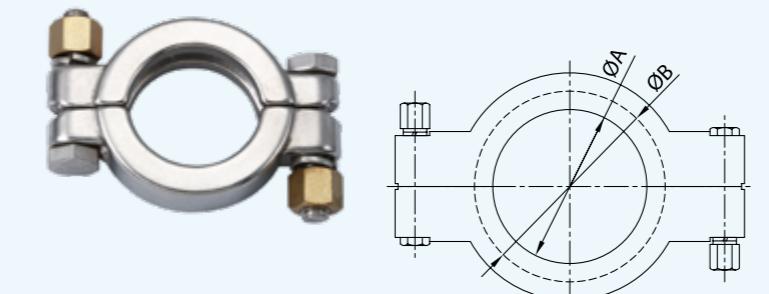


SIZE	ØA	ØB
1/2"~3/4"	21.2	28.2
A37	27.8	37
1"~1.5"	42	53.6
2"	55.4	67
2.5"	69	80.6
3"	82.6	94.2
3.5"	97.6	109.2
4"	110.6	122.2
4.5"	121.6	133.2
6"	156.2	170.4
8"	205.8	220

重型卡箍

Heavy Duty Clamp-Rings

13MHHS 3 片式卡箍


13MHHS 3 Pieces Clamp



SIZE	ØA	B
1"~1.5"	54	80
2"	67.5	94
2.5"	80.9	109
3"	84.4	126
4"	122.4	154

13CS 双铆钉卡箍


13CS Double Pin Clamp

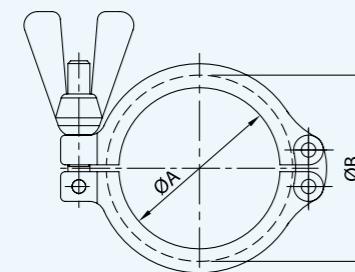

SIZE	ØA	ØB
1/2"~3/4"	20.58	28.34
DN10-20	27.2	37
1.5"	41.02	53.52
DN25-40	44.5	54.5
2.0"	54.54	67.04
DN50	57	68
2.5"	68.02	80.52
3.0"	81.52	94.02
DN65	84	95
DN80	99	110
4.0"	109.54	122.04
DN100	112	123
DN115	123	134
DN125	144	159
6.0"	157.6	175.1
DN150	172	187
8.0"	207.4	225.9
DN200	222.5	237.5
DN250	257	272
DN300	308	323

13I I-LINE 卡箍

13I I-Line Clamp

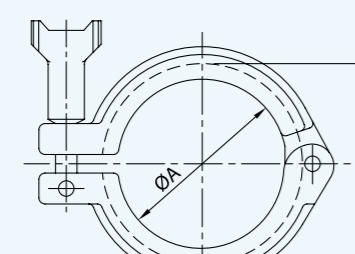

SIZE	ØA	ØB
1.0"~1.5"	44.4	53.4
2.0"	60.14	72.2
2.5"	78.62	88.1
3.0"	93.06	102.4
4.0"	118.6	127.8
6.0"	178.3	195.3

卡盘零件


Ferrule Adapters

3A/SMS 焊式卡盘

3A/SMS Welding Ferrule



3A-1/2"~3/4"
SMS-DN15~DN20
DIN-DN6~DN8
DIN(ISO)-DN6~DN10




SIZE	ØA	ØB	ØC	L	14WMP	14MMP	14AMP
1/4"	3.9	6.35	25	12.7	21.5	28.6	
1/2"	9.4	12.7	25	12.7	21.5	28.6	
DN15	9.7	12.7	25.4	12.7	21.5	28.6	
3/4"	15.75	19.05	25	12.7	21.5	28.6	
DN20	15.95	19.05	25.4	12.7	21.5	28.6	
1"	22.1	25.4	50.5	12.7	21.5	28.6	
DN25	22.5	25	50.5	12.7	21.5	28.6	
1.25"	28.45	31.75	50.5	12.7	21.5	28.6	
1.5"	34.8	38.1	50.5	12.7	21.5	28.6	
DN38	35.5	38	50.5	12.7	21.5	28.6	
2.0"	47.5	50.8	64	12.7	21.5	28.6	
DN50	48.5	51	64	12.7	21.5	28.6	
2.5"	60.2	63.5	77.5	12.7	21.5	28.6	
DN63	60.3	63.5	77.5	12.7	21.5	28.6	
DN76	72.9	76.1	91	12.7	21.5	28.6	
3.0"	72.9	76.2	91	12.7	21.5	28.6	
DN104	100	104	119	15.8	21.5	28.6	
4.0"	97.4	101.6	119	15.8	21.5	28.6	
5.0"	121.46	127	144.45	15.8	21.5	28.6 or 38.1	
6.0"	146.86	152.4	166.87	—	21.5	28.6 or 38.1	
8.0"	197.66	203.2	217.67	—	21.5	28.6 or 38.1	
10"	247.2	254	268.47	—	21.5	28.6 or 38.1	
12"	298	304.8	319.27	—	21.5	28.6 or 38.1	

DIN 焊式卡盘

DIN Welding Ferrule



3A-1.0"~12"
SMS-DN25~DN100
DIN-DN10~DN100
DIN(ISO)-DN15~DN200




SIZE	DA ØA	DB ØB	ØC	L
DN6	6	8	—	25
DN8	8	10	—	25
DN10	10	13	9	34
DN15	16	19	15	34
DN20	20	23	19	34
DN25	26	29	25	28
DN32	32	35	31	34
DN40	38	41	37	40
DN50	50	53	49	52
DN65	66	70	66	70
DN80	81	85	81	85
DN101.6	—	—	97.6	101.6
DN100	100	104	100	104
DN125	125	129	125	129
DN150	150	154	150	154
DN200	200	204	200	204

卡盘零件

Ferrule Adapters

ISO(REP) 焊式卡盘


ISO(REP) Welding Ferrule



SIZE	ØA	ØB	ØC1	L
DN8	10.3	13.5	34	28.6
DN10	14	17.2	34	28.6
DN15	18.1	21.3	34	28.6
DN20	23.7	26.9	50.5	28.6
DN25	30.5	33.7	50.5	28.6
DN32	39.2	42.4	50.5	28.6
DN40	45.1	48.3	64	28.6
DN50	56.3	60.3	77.5	28.6
DN65	72.1	76.1	91	28.6
DN80	84.3	88.9	106	28.6
DN100	109.7	114.3	130	28.6
DN125	133.7	139.7	155	28.6
DN150	162.3	168.3	183	28.6
DN200	211.1	219.1	233.5	28.6
DN250	266.3	273.1	233.5	28.6

ISO-2852 焊式卡盘

ISO-2852 Welding Ferrule



SIZE	ØA	ØB	ØC	L
25	22.6	25.6	50.5	21.5
33.7	31.3	34.3	50.5	21.5
38	35.6	38.6	50.5	21.5
40	37.6	40.6	64	21.5
51	48.6	51.6	64	21.5
63.5	60.3	64.1	77.5	21.5
70	66.8	70.6	91	21.5
76.1	72.9	76.7	91	21.5
88.9	84.9	89.8	106	21.5
101.6	97.6	102.5	119	21.5
114.3	110.3	115.6	130	28
139.7	135.7	141.2	155	28
168.3	163.1	170	183	28
219.1	213.9	221.2	233.5	28

卡盘零件

Ferrule Adapters

卡盘垫片

13PG Ferrule Gasket (EPDM、SILICONE、VITON、PTFE)



1/2"~3/4"




1"~8"

DN10~DN200



1/2"~3/4"



1"~8"



DN10~DN200

Imperial	ØA	ØB
1/2"	9.9	21.8
3/4"	16.3	21.8
A37	19	33
1"	22.7	50
1.25"	29.5	50.5
1.5"	35.9	50
2"	48.6	63.5
2.5"	61.3	76.2
3"	74	88.9
3.5"	86	105
4"	98.6	118
4.5"	110.5	129
5"	134.7	153
6"	147.8	165
8"	198.6	216

ISO(PTFE)	ØA	ØB
DN8	11.1	33.2
DN12	14.8	33.2
DN15	18.9	33.2
DN20	24.5	49.7
DN25	31.3	49.7
DN32	40	49.7
DN40	45.9	63.2
DN50	57.1	76.7
DN65	72.9	90.2
DN80	85.7	105.2
DN100	109.9	129.2
DN125	134.5	154.2
DN150	163.1	182.2
DN200	211.9	232.7

DIN(EPDM)	ØA	ØB
DN10	9.8	33.2
DN15	15.8	33.2
DN20	19.8	33.2
DN28	25.8	49.7
DN34	31.8	49.7
DN40	37.8	49.7
DN52	49.8	63.2
DN70	66.8	90.2
DN85	81.8	105.2
DN101.6	98.4	118.2
DN104	100.8	118.2
DN125	125.8	154.2
DN150	150.8	182.2
DN200	200.8	232.7


卡盘零部件

Ferrule Adapters


复合垫片 13PG (EPDM+PTFE)

Imperial 13PG(EPDM+PTFE)


1/2"



3/4"




1.0"~4.0"



SIZE	ØA	ØB
1/2"	10	21.5
3/4"	16.3	21.8
1"	22.5	50.2
1.5"	34.9	50.2
2"	47.6	63.5
2.5"	60.5	77.7
3"	73.2	90.5
4"	97.7	118.4

法兰型 13FG

Flange Type 13FG





SIZE	ØA	ØB
1"	22.8	52.7
1.5"	35.8	52.7
2"	48.8	66.2
2.5"	60.5	79.7
3"	73.1	93.2
4"	97.8	121.2
6"	148	169.1
10"	249	270.7
12"	300	321.5

卡盘零部件

Ferrule Adapters

盲板

Blank

1/2"~3/4"
DIN6~DIN8A37"~12"
DIN10~DIN200
ISO(REP)

Imperial 16 AMP

SIZE	ØA	L
1/2"	25	6
3/4"	25	6
A37	34	6.3
1.0"	50.5	6.3
1.5"	50.5	6.3
2.0"	64	6.3
2.5"	77.5	6.3
3.0"	91	6.3
3.5"	106	6.3
4.0"	119	7.9
6.0"	166.87	11.1
8.0"	217.67	11.1
10"	268.47	11.1
12"	319.27	11.1

DIN 16 AMP

SIZE	ØA	L
DN6	25	4.75
DN8	25	4.75
DN10	34	6.35
DN15	34	6.35
DN20	34	6.35
DN25	50.5	6.35
DN32	50.5	6.35
DN40	50.5	6.35
DN50	64	6.35
DN65	91	6.35
DN80	106	6.35
DN100	119	8
DN125	155	8
DN150	183	11.1
DN200	233.5	11.1

ISO(REP) 16 AMP

SIZE	ØA	L
DN8	34	6.3
DN12	34	6.3
DN15	34	6.3
DN20	50.5	6.3
DN25	50.5	6.3
DN32	50.5	6.3
DN40	64	6.3
DN50	77.5	6.3
DN65	91	6.3
DN80	106	6.3
DN100	130	7.9
DN125	155	7.9
DN150	183	11.1
DN200	233.5	11.1

卡盘零件

Ferrule Adapters

14WHR 软管接头

14WHR Hose Adapter



SIZE	ØA	ØB	ØC	L
1/2"	9.5	13.7	25.2	25.3
3/4"	15.8	21.4	25.2	25.3
1.0"	20.6	25.4	50.5	30.3
1.5"	33.2	38.1	50.5	30.3
2.0"	46	50.8	64	46
2.5"	58.7	63.5	77.5	46.8
3.0"	72	76.2	91	65.9
4.0"	97.6	101.6	119	72.8

14MPHR 软管接头

14MPHR Hose Adapter



SIZE	ØA	ØB	ØC	L
1/2"*1/4"	3.175	7.3	25.2	38
1/2"*3/8"	6.35	10.4	25.2	38
1/2"*1/2"	9.5	13.7	25.2	38
1/2"*5/8"	12.7	16.8	25.2	38
3/4"*1/4"	3.175	7.3	25.2	38
3/4"*3/8"	6.35	10.4	25.2	38
3/4"*1/2"	9.5	13.7	25.2	38
3/4"*5/8"	12.7	16.8	25.2	38
3/4"*3/4"	15.8	21.4	25.2	38
1.0"*1/4"	3.175	7.3	50.5	38
1.0"*3/8"	6.35	10.4	50.5	38
1.0"*1/2"	9.5	13.7	50.5	38
1.0"*5/8"	12.7	16.8	50.5	38
1.0"*3/4"	15.8	21.4	50.5	38


SIZE	ØA	ØB	ØC	L
1.0"*1.0"	20.6	25.4	50.5	43
1.5"*3/8"	6.35	10.4	50.5	38
1.5"*1/2"	9.5	13.7	50.5	38
1.5"*5/8"	12.7	16.8	50.5	38
1.5"*3/4"	15.8	21.4	50.5	38
1.5"*1.0"	20.6	25.4	50.5	43
1.5"*1.25"	26.8	31.75	50.5	43
1.5"*1.5"	33.2	38.1	50.5	43
2.0"*1.25"	26.8	31.75	64	43
2.0"*1.5"	33.2	38.1	64	43
2.0"*2.0"	46	50.8	64	58.7
2.5"*2.5"	58.7	63.5	77.5	59.5
3.0"*3.0"	72	76.2	91	78.6
4.0"*4.0"	97.6	101.6	119	85.5

卡盘零件

Ferrule Adapters

21MP 卡盘螺纹接头

21MP Ferrule/Threads Adapter



SIZE	ØA	ØC	NPT	L
1/2"*1/2"	9.5	25	1/2"	45
3/4"*1/4"	7.95	25	1/4"	45
3/4"*1/2"	15.8	25	1/2"	45
3/4"*3/4"	15.8	25	3/4"	45
1.0"&1.5"*1/4"	3.18	50.5	1/4"	40
1.0"&1.5"*3/8"	6.35	50.5	3/8"	40
1.0"&1.5"*1/2"	9.5	50.5	1/2"	40
1.0"&1.5"*3/4"	15.8	50.5	3/4"	45
1.0&1.5*1.0"	22.2	50.5	1.0"	50
1.0&1.5*1.25"	28.6	50.5	1.25"	50
1.0&1.5*1.5"	34.9	50.5	1.5"	50
1.0&1.5*2.0"	47.6	50.5	2.0"	55
2.0"*1/4"	3.18	64	1/4"	40
2.0"*3/8"	6.35	64	3/8"	40
2.0"*1/2"	9.5	64	1/2"	40
2.0"*3/4"	15.8	64	3/4"	50
2.0"*1.0"	22.2	64	1.0"	50
2.0"*1.5"	34.9	64	1.5"	50
2.0"*2.0"	47.6	64	2.0"	55
2.0"*2.5"	60.3	64	2.5"	60

SIZE	ØA	ØC	NPT	L
2.0"*3.0"	73	64	3.0"	70
2.0"*4.0"	97.6	64	4.0"	75
2.5"*1.0"	22.2	77.5	1.0"	50
2.5"*1.5"	34.9	77.5	1.5"	50
2.5"*2.0"	47.6	77.5	2.0"	55
2.5"*2.5"	60.3	77.5	2.5"	60
2.5"*3.0"	73	77.5	3.0"	70
2.5"*4.0"	97.6	77.5	4.0"	75
3.0"*1.0"	22.2	91	1.0"	55
3.0"*1.5"	34.9	91	1.5"	55
3.0"*2.0"	47.6	91	2.0"	55
3.0"*2.5"	60.3	91	2.5"	60
3.0"*3.0"	73	119	3.0"	70
3.0"*4.0"	97.6	119	4.0"	75

22MP 卡盘螺纹接头


22MP Ferrule/Threads Adapter




SIZE	ØA	ØC	ØD	NPT	L
1/2"*1/4"	9.5	25	30	1/4"	33
1/2"*1/2"	9.5	25	30	1/2"	33
3/4"*1/2"	15.75	25	30	1/2"	38.1
3/4"*3/4"	15.8	25	31	3/4"	33
1.0"&1.5"*1.25"	22.2	34.9	50.5	1.25"	39
1.0"&1.5"*1.5"	22.2	34.9	50.5	1.5"	39
1.0"&1.5"*2.0"	22.2	34.9	50.5	2.0"	40
2.0"*2.0"	47.6	64	65	2.0"	40
2.5"*2.5"	60.3	77.5	80	2.5"	50
3.0"*2.5"	73	91	95	2.5"	50
3.0"*3.0"	73	91	95	3.0"	52
4.0"*4.0"	97.6	119	120	4.0"	54




Type A



Type B



Type C



Imperial	ØA	L
1"	25.4	66
1.5"	38.1	76
2"	50.8	90
2.5"	63.5	105
3"	76.2	120
4"	101.6	146

DIN	ØA	L
DN15	18/19	69
DN20	22/23	66
DN25	28/29	64.5
DN32	34/35	78.5
DN40	40/41	80.5
DN50	52/53	94
DN65	70	123.5
DN80	85	130.5
DN100	104	150
DN125	129	175.5
DN150	154	206.5

管支架



Tubing Hangers

TH-2


TH-2



Type A

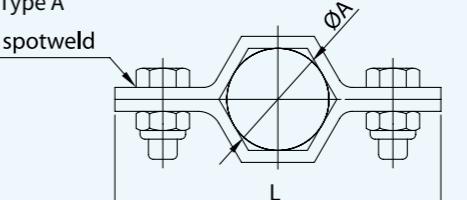

Type C

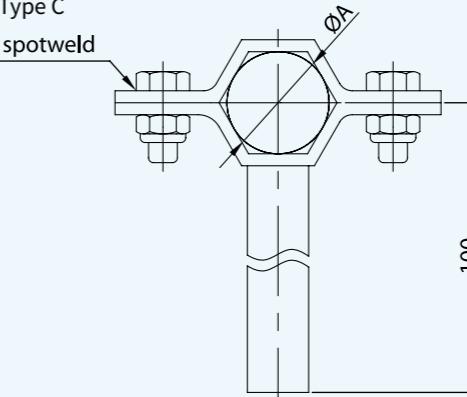

ISO	ØA	L
ISO-21.3	21.3	68
ISO-26.9	26.9	74
ISO-33.7	33.7	82
ISO-42.4	42.4	93
ISO-48.3	48.3	101
ISO-60.3	60.3	114
ISO-88.9	88.9	149
ISO-114.3	114.3	177
ISO-139.7	139.7	221.7
ISO-168.7	168.7	254.8


SMS	ØA	L
DN25	25	74
DN38	38	87
DN50	51	105
DN63	63.5	117
DN76	76.1	133
DN100	104	165
DN125	139.7	221.7
DN150	168.3	254.8

TH-3(六角形) 管支架


TH-3(Hexagon)




Type A



Type B



Type C

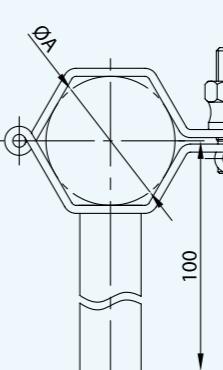

DIN	ØA	L
DN25	28	64
DN32	34	64
DN40	40	78
DN50	52	90
DN65	70	111
DN80	85	129
DN100	101.6	150

SMS	ØA	L
DN25	25	61
DN38	38	76
DN50	51	90
DN63	63.5	106
DN76	76.1	124
DN100	104	154

卫生级零组件，配件类



Sanitary components, fittings

DIN 11851 油任


DIN 11851 Unions

DIN 圆形螺母

DIN-13 Round Nut



SIZE	ØA	B	ØC	L	SLOTS
10	19	RD 28*1/8	38	18	4
15	25	RD 34*1/8	44	18	4
20	31	RD 44*1/6	54	20	4
25	36	RD 52*1/6	63	21	4
32	42	RD 58*1/6	70	21	4
40	49	RD 65*1/6	78	21	4
50	62	RD 78*1/6	92	22	4
60	70	RD 85*1/6	99	22	4
65	80	RD 95*1/6	112	25	6
80	94	RD 110*1/4	127	29	6
90	104	RD 120*1/4	138	30	6
100	115	RD 130*1/4	148	31	6
125	138	RD 160*1/4	178	35	6
150	164	RD 190*1/4	210	40	6



重-duty Clamp-Rings

Ferrule Adapters

Tubing Hangers

DIN 11851 油任

SMS 油任

3A 管件

SMS 管件

SMS 大小头

BPE 管件

卫生级零组件，配件类


Sanitary Components, Fittings

DIN 11851 油任

DIN 11851 Unions

DIN-15DA/DB 外螺纹接头


DIN-15DA/DB Welding Male



SIZE	DA		DB		C	L
	ØA	ØB	ØA	ØB		
10	10	13	9	12	RD 28*1/8	21
15	16	19	15	18	RD 34*1/8	21
20	20	23	19	22	RD 44*1/6	24
25	26	29	25	28	RD 52*1/6	29
32	32	35	31	34	RD 58*1/6	32
40	38	41	37	40	RD 65*1/6	33
50	50	53	49	52	RD 78*1/6	35
60	57	61	57	61	RD 85*1/6	36
65	66	70	66	70	RD 95*1/6	40
80	81	85	81	85	RD 110*1/4	45
90	89	93	89	93	RD 120*1/4	54
100	100	104	100	104	RD 130*1/4	54
125	125	129	125	129	RD 160*1/4	46
150	150	154	150	154	RD 190*1/4	50

DIN 垫圈 (EPDM、SILICONE、VITON(FKM))



DIN Seal Ring(EPDM, SILICONE, VITON(FKM))



SIZE	ØA	B	L
10	12	4	4.5
15	18	4	4.5
20	23	5	4.5
25	30	5	5
32	36	5	5
40	42	5	5
50	54	5	5
65	71	5	5
80	85	5	5
100	104	5	5
125	130	6	7
150	155	6	7

DIN-14DA/DB 平接头


DIN-14DA/DB Welding Liner



SIZE	DA		DB		ØC	L
	ØA	ØB	ØA	ØB		
10	10	13	9	12	22.5	17
15	16	19	15	18	28.5	17
20	20	23	19	22	36.5	18
25	26	29	25	28	44	22
32	32	35	31	34	50	25
40	38	41	37	40	56	26
50	50	53	49	52	68.5	28
60	57	61	57	61	76	30
65	66	70	66	70	86	32
80	81	85	81	85	100	37
100	100	104	100	104	121	44
125	125	129	125	129	150	34
150	150	154	150	154	176	37

DIN-15I 英制外螺纹

DIN-15I Imperial Welding Male




SIZE	ØA	ØB	ØC	D	L
1/2"	9.4	12.7	10	RD 28*1/8	21
3/4"	15.75	19.05	20	RD 44*1/6	24
1"	22.1	25.4	26	RD 52*1/6	29
1.25"	28.45	31.75	32	RD 58*1/6	32
1.5"	34.8	38.1	38	RD 65*1/6	33
2"	47.5	50.8	50	RD 78*1/6	35
2.5"	60.2	63.5	66	RD 95*1/6	40
3"	72.9	76.2	81	RD 110*1/4	45
4"	97.6	101.6	100	RD 130*1/4	54

DIN 11851 油任

DIN 11851 Unions

DIN-141 英制平接头

DIN-141 Imperial Welding Liner

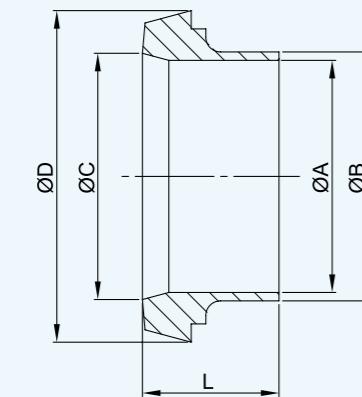


SIZE	ØA	ØB	ØC	ØD	L
1/2"	9.4	12.7	10	22.5	17
3/4"	15.75	19.05	20	36.5	18
1"	22.1	25.4	26	44	22
1.25"	28.45	31.75	32	50	25
1.5"	34.8	38.1	38	56	26
2"	47.5	50.8	50	68.5	28
2.5"	60.2	63.5	66	86	32
3"	72.9	76.2	81	100	37
4"	97.6	101.6	100	121	44

SMS 油任

SMS Unions

SMS-13R 6 沟螺母


SMS-13R Nut 6 Slots

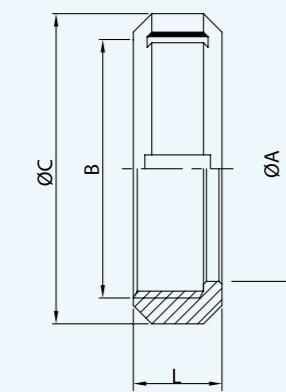

SIZE	ØA	B	ØC	L
25	32.3	RD 40*1/6	51	19
32	40.3	RD 48*1/6	60	22
38	48.5	RD 60*1/6	74	23
50	61	RD 70*1/6	84	24
63	74	RD 85*1/6	100	28
76	87	RD 98*1/6	114	30
101.6	113	RD125*1/4	138	31
104	113	RD125*1/4	138	31
102.5	117	RD132*1/6	150	31

SMS-13RBN 盲盖螺母

SMS-13RBN Round Blank Nut

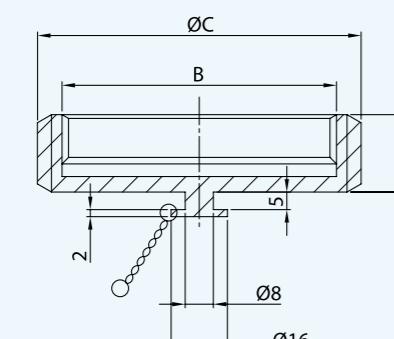


SIZE	B	ØC	L
25	RD 40*1/6	51	19
32	RD 48*1/6	60	22
38	RD 60*1/6	74	23
50	RD 70*1/6	84	24
63	RD 85*1/6	100	28
76	RD 98*1/6	114	30
104	RD125*1/4	138	31
102.5	RD132*1/6	150	31

SMS 油任

SMS Unions

SMS-14 长型平接头



SMS-14 Long Welding Liner

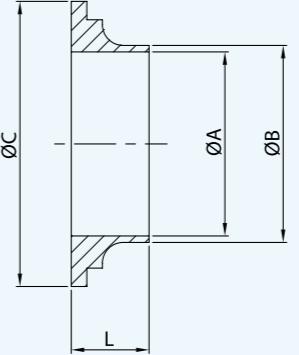

SIZE	ØA	ØB	ØC	L
25	22.5	25	35.5	15.5
38	35.5	38	55	16
50	48.5	51	65	17
63	60.5	63.5	80	17
76	72.9	76.1	93	19
101.6	97.6	101.6	118	19
104	100	104	118	19
102.5	98.5	102.5	127	19

SMS-15 长型外螺纹接头


SMS-15 Long Welding Male



SIZE	ØA	ØB	ØC	L
25	22.5	25	RD 40*1/6	19
38	35.5	38	RD 60*1/6	23
50	48.5	51	RD 70*1/6	23
63	60.5	63.5	RD 85*1/6	27
76	72.9	76.1	RD 98*1/6	27
101.6	97.6	101.6	RD125*1/4	30
104	100	104	RD125*1/4	30
102.5	98.5	102.5	RD132*1/6	35

SMS-14S 短型平接头



SMS-14S Short Welding Liner



SIZE	ØA	ØB	ØC	L
25	22.5	25	35.5	7.5
38	35.5	38	55	8
50	48.5	51	65	9
63	60.5	63.5	80	9
76	72.9	76.1	93	9
101.6	97.6	101.6	118	10
104	100	104	118	12
102.5	98.5	102.5	127	12

SMS-15S 短型平接头


SMS-15S Short Welding Male



SIZE	ØA	ØB	C	L
25	22.5	25	RD 40*1/6	15
38	35.5	38	RD 60*1/6	20
50	48.5	51	RD 70*1/6	20
63	60.5	63.5	RD 85*1/6	24
76	72.9	76.1	RD 98*1/6	24
101.6	97.6	101.6	RD125*1/4	30
104	100	104	RD125*1/4	30
102.5	98.5	102.5	RD132*1/6	35

SMS-14B 盲盖


SMS-14B Blank End Cap



SIZE	ØA	ØB	C	L
25	32	35.5	3.5	7.5
38	48	55	5	9
50	60	65	5	10
63	73.5	80	5	10
76	86	93	5	11
101.6/104	116	118	6	11
102.5	112	128	6	11

SMS- 垫圈 L型 (EPDM、SILICONE、VITON(FKM))

Seal Ring L Type(EPDM、SILICONE、VITON(FKM))



SIZE	ØA	ØB	C	L
25	22.8	25.1	31.8	5.3
38	35.8	38.1	47.8	5.3
50	48.8	51.1	60.8	5.3
63	61	63.6	73.3	5.3
76	73.4	76.1	85.8	5.3
104/102.5	100.5	104	115.7	5.3

SA.SMS.DIN.BS.AS

管线 / 弯头 / 三通 / 大小头

SA.SMS.DIN.BS.AS
Tube Line / Elbow / Tee / Reducer

不锈钢管件

Wide Range Tube Line

可应用于卫生, 制药, 真空等行业

Can be used for sanitary, pharmaceutical, vacuum...etc purposes



DIN 11851 沃任

用于生物化学、制药、食品 ... 等方面的卫生管

Sanitary Tubes For Biochemistry, Pharmaceutical, Food...etc

BPE STANDRD		
SIZE	O.D.	T
1/4"	6.35	0.89
3/8"	9.53	0.89
1/2"	12.7	1.65
3/4"	19.05	1.65
1.0"	25.4	1.65
1.5"	38.1	1.65
2.0"	50.8	1.65
2.5"	63.5	1.65
3.0"	76.2	1.65
4.0"	101.6	2.11
6.0"	152.4	2.77

3A STANDRD		
SIZE	O.D.	T
1/4"	6.35	1.245
3/8"	9.53	1.245
1/2"	12.7	1.65
3/4"	19.05	1.65
1.0"	25.4	1.65
1.5"	38.1	1.65
2.0"	50.8	1.65
2.5"	63.5	1.65
3.0"	76.2	1.65
4.0"	101.6	2.1
5.0"	127	2.77
6.0"	152.4	2.77
8.0"	203.2	2.77
10"	254	3.05
12"	304.8	3.05

SMS(ISO 2037) STANDRD		
SIZE	O.D.	T
DN25	25	1.2
DN38	38	1.2
DN50	51	1.2
DN63	63.5	1.6
DN76	76.1	1.6
DN100	101.6	2

IDF STANDRD		
SIZE	O.D.	T
1.0 ^s	25.4	1.2
1.25 ^s	31.8	1.2
1.5 ^s	38.1	1.2
2.0 ^s	50.8	1.5
2.5 ^s	63.5	2
3.0 ^s	76.3	2
3.5 ^s	89.1	2
4.0 ^s	101.6	2
4.5 ^s	114.3	3
5.5 ^s	139.8	3
6.5 ^s	165.2	3

不锈钢管件

Wide Range Tube Line

用于生物化学, 制药, 食品 ... 等方面的卫生管

Sanitary Tubes For Biochemistry, Pharmaceutical, Food...etc

DIN EN10357 DIN11850/11865				
SIZE	O.D-DB	O.D-DA	O.D(DIN1865)	T
DN6	—	—	8	1
DN8	—	—	10	1
DN10	12	13	13	1.5
DN15	18	19	19	1.5
DN20	22	23	23	1.5
DN25	28	29	29	1.5
DN32	34	35	35	1.5
DN40	40	41	41	1.5
DN50	52	53	53	1.5
DN65	70	70	70	2
DN80	85	85	85	2
DN100	104	104	104	2
DN125	129	129	129	2
DN150	154	154	154	2
DN200	204	204	204	2
DN250	254	—	2	—
DN300	306	—	3	—

A size (JIS G3459) STANDRD			
SIZE	O.D.	T(SCH.55)	T(SCH.105)
6A	10.5	1	1.2
8A	13.8	1.2	1.65
10A	17.3	1.2	1.65
15A	21.7	1.65	2.1
20A	27.2	1.65	2.1
25A	34	1.65	2.8
32A	42.7	1.65	2.8
40A	48.6	1.65	2.8
50A	60.5	1.65	2.8
65A	76.3	2.1	3
80A	89.1	2.1	3
90A	101.6	2.1	3
100A	114.3	2.1	3
125A	139.8	2.8	3.4
150A	165.2	2.8	3.4
200A	216.3	2.8	4
250A	267.4	3.4	4
300A	318.5	4	4.5

可以配备不同类型的连接端, 如 45°、90°弯头, 三通,

It can be equipped with different types or connection ends , as 45°/90° elbow , tee , concentric/eccentric reducer...weld , clamp , unions...

同心、偏心大小头, 焊式, 夹式, 螺纹等。

Standard type: 3A , SMS , DIN , BS , BPE...etc

标准类型: 3A , SMS , DIN , BS , BPE.....

材质: ASTM 304, 316, 316L

Material: ASTM 304,316,316L

表面处理: 1. 内外抛光

Surface: 1. ID/OD polishing

2. 内抛

2. Only ID polishing

3. 外抛

3. Only OD polishing

4. 不抛光

4. unpolishing

粗糙度: #400, #320, #240, #180....

Roughness: #400 , #320 , #240 , #180...

Ra ≤ 0.8μm, 0.6μm, 0.5μm, 0.4μm.....

Ra≤0.8μm , 0.6μm , 0.5μm , 0.4μm...

(可提供其他表面处理)

(Other surface finished can be ordered)



用于生物化学、制药、食品 ... 等方面的卫生管

Sanitary Tubes For Biochemistry, Pharmaceutical, Food...etc

用于食品和制药行业的卫生管材

材料: ASTM 304, 304L, 316L

规格: ASTM A269, A270

表面和粗糙度 :

1. 外径 / 内径酸洗 (Ra ≤ 1.0μm)

2. 抛光

(1) 内径抛光至 180Grit (Ra ≤ 0.8μm)

(2) 内径抛光至 240Grit (Ra ≤ 0.6μm)

(3) 内径抛光至 320Grit (Ra ≤ 0.5μm)

(4) 内径抛光至 420Grit (Ra ≤ 0.4μm)

5) 电抛光:

(5-1) 内径电抛光 Ra ≤ 0.5μm)

(5-2) 内径电抛光 Ra ≤ 0.38μm)

Sanitary for food, and pharmaceutical industry

Material: ASTM 304, 304L, 316L

Spec: ASTM A269, A270.

Surface & Roughness:

1. OD/ID Pickle (Ra ≤ 1.0μm)

2. Polished:


(1)ID Polished to 180Grit (Ra ≤ 0.8μm)

(2)ID Polished to 240Grit (Ra ≤ 0.6μm)

(3)ID Polished to 320Grit

2WK 45 度短弯头


2WK Short 45° Elbow

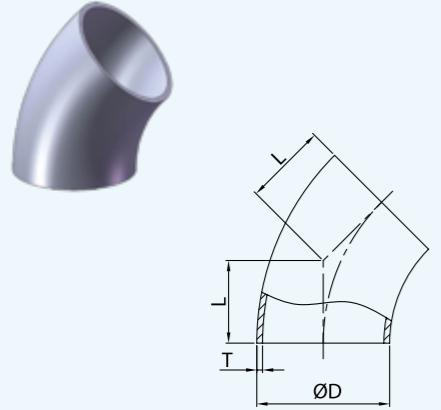

SIZE	ØD	L	T
1/2"	12.7	7.9	1.65
3/4"	19.05	11.8	1.65
1"	25.4	15.8	1.65
1.5"	38.1	23.8	1.65
2"	50.8	31.75	1.65
2.5"	63.5	39.6	1.65
3"	76.2	47.6	1.65
4"	101.6	63.5	2.1
5"	127	78.91	2.77
6"	152.4	95.25	2.77
8.0"	203.2	126.25	3.05
10"	254	157.82	3.05
12"	304.8	189.38	3.05

L2KS 45 度长弯头

L2KS Long 45° Elbow

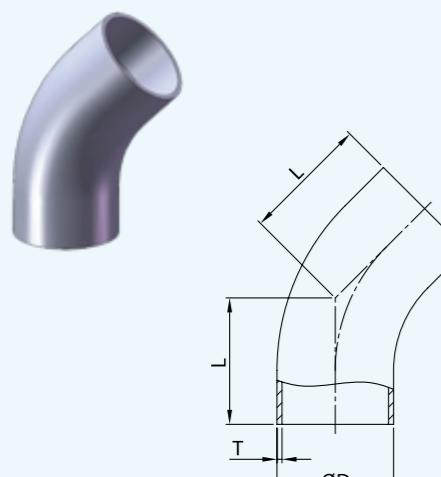


SIZE	ØD	L	T
1/2"	12.7	30.2	1.65
3/4"	19.05	30.2	1.65
1"	25.4	30.2	1.65
1.5"	38.1	41.3	1.65
2"	50.8	58.7	1.65
2.5"	63.5	76.2	1.65
3"	76.2	93.7	1.65
4"	101.6	122.2	2.1
5"	127	142.41	2.77
6"	152.4	158.19	2.77
8"	203.2	189.75	3.05
10"	254	234.02	3.05
12"	304.8	265.58	3.05

3A 管件

3A Tubular Items

2WCL 90 度短弯头


2WCL Short Weld 90° Elbow

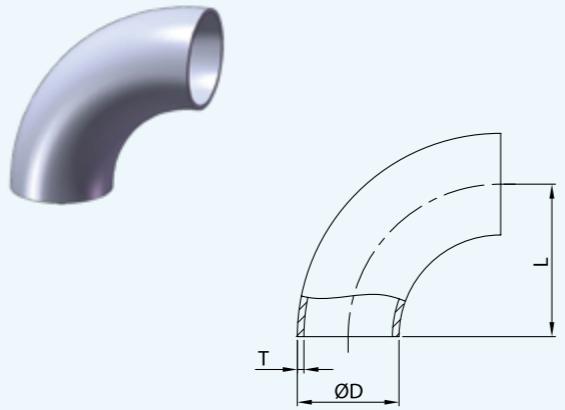

SIZE	ØD	L	T
1/2"	12.7	19.05	1.65
3/4"	19.05	28.58	1.65
1"	25.4	38.1	1.65
1.5"	38.1	57.2	1.65
2"	50.8	76.2	1.65
2.5"	63.5	95.25	1.65
3"	76.2	114.3	1.65
4"	101.6	152.4	2.1
5"	127	190.5	2.77
6"	152.4	228.6	2.77
8"	203.2	304.8	2.77
10"	254	381	3.05
12"	304.8	457.2	3.05

L2S 90 度长弯头

L2S Long Weld 90° Elbow

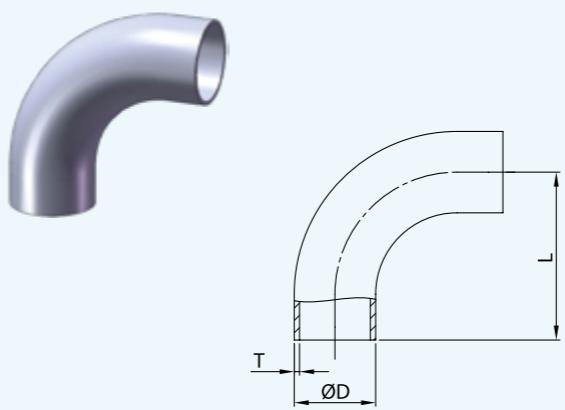



SIZE	ØD	L	T
1/2"	12.7	76.2	1.65
3/4"	19.05	76.2	1.65
1"	25.4	52.4	1.65
1.5"	38.1	74.6	1.65
2"	50.8	103.2	1.65
2.5"	63.5	131.8	1.65
3"	76.2	160.3	1.65
4"	101.6	211.1	2.1
5"	127	254	2.77
6"	152.4	292.1	2.77
8"	203.2	368.3	3.05
10"	254	457.2	3.05
12"	304.8	533.4	3.05

3A 管件

3A Tubular Items

7WWW 短三通

7WWW Short Equal Weld Tee

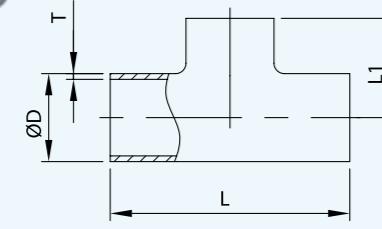



SIZE	ØD	L	L1	T
1/2"	12.7	38.1	19.05	1.65
3/4"	19.05	57.2	28.6	1.65
1.0"	25.4	57.2	28.6	1.65
1.5"	38.1	84.2	42.1	1.65
2.0"	50.8	104.8	52.4	1.65
2.5"	63.5	119	59.5	1.65
3.0"	76.2	131.8	65.9	1.65
4.0"	101.6	174.6	87.3	2.1
5.0"	127	254	127	2.77
6.0"	152.4	254	127	2.77
8.0"	203.2	355.6	177.8	3.05
10"	254	431.8	215.9	3.05
12"	304.8	508	254	3.05

3A 管件

3A Tubular Items

7RW 变径长三通



7RW Long Reducing Weld Tee

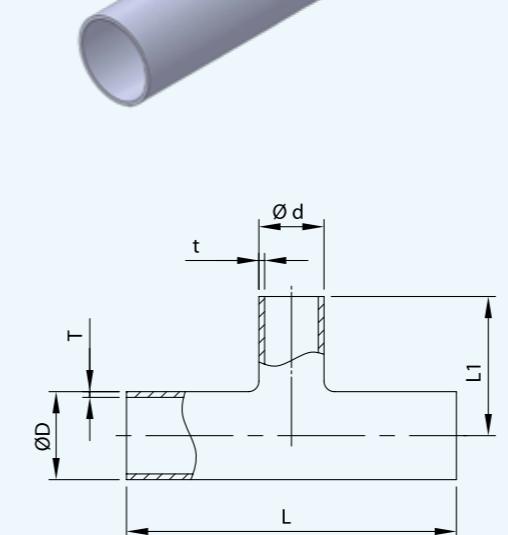

SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	95.5	47.6	1.65	1.65
1.0"*1/2"	25.4	12.7	95.5	47.6	1.65	1.65
1.0"*3/4"	25.4	19.05	95.5	47.6	1.65	1.65
1.5"*1/2"	38.1	12.7	114.3	57.2	1.65	1.65
1.5"*3/4"	38.1	19.05	114.3	57.2	1.65	1.65
1.5"*1.0"	38.1	25.4	114.3	53.98	1.65	1.65
2.0"*1/2"	50.8	12.7	152.4	76.2	1.65	1.65
2.0"*3/4"	50.8	19.05	152.4	76.2	1.65	1.65
2.0"*1.0"	50.8	25.4	152.4	60.3	1.65	1.65
2.0"*1.5"	50.8	38.1	152.4	63.5	1.65	1.65
2.5"*1.0"	63.5	25.4	152.4	69.85	1.65	1.65
2.5"*1.5"	63.5	38.1	152.4	69.85	1.65	1.65
2.5"*2.0"	63.5	50.8	152.4	82.55	1.65	1.65
3.0"*1.0"	76.2	25.4	165.1	79.38	1.65	1.65
3.0"*1.5"	76.2	38.1	165.1	76.2	1.65	1.65
3.0"*2.0"	76.2	50.8	165.1	88.9	1.65	1.65
3.0"*2.5"	76.2	63.5	165.1	82.55	1.65	1.65
4.0"*1.0"	101.6	25.4	196.8	92.08	2.1	1.65
4.0"*1.5"	101.6	38.1	196.8	92.08	2.1	1.65
4.0"*2.0"	101.6	50.8	196.8	101.6	2.1	1.65
4.0"*2.5"	101.6	63.5	196.8	95.25	2.1	1.65
4.0"*3.0"	101.6	76.2	196.8	95.25	2.1	1.65
6.0"*2.0"	152.4	50.8	285.8	120.65	2.77	1.65
6.0"*2.5"	152.4	63.5	285.8	120.65	2.77	1.65
6.0"*3.0"	152.4	76.2	285.8	120.65	2.77	1.65
6.0"*4.0"	152.4	101.6	285.8	123.8	2.77	2.1

7W 长三通


7W Long Equal Weld Tee

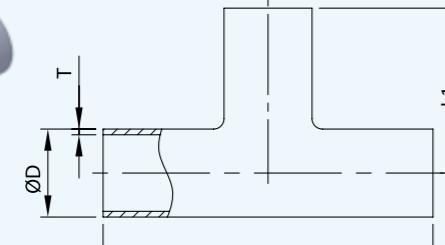

SIZE	ØD	L	L1	T
1/2"	12.7	95.2	47.6	1.65
3/4"	19.05	95.2	47.6	1.65
1.0"	25.4	95.2	47.6	1.65
1.5"	38.1	114.4	57.2	1.65
2.0"	50.8	152.4	76.2	1.65
2.5"	63.5	152.4	76.2	1.65
3.0"	76.2	165.2	82.6	1.65
4.0"	101.6	196.8	98.4	2.1
5.0"	127	285.8	142.9	2.77
6.0"	152.4	285.8	142.9	2.77
8.0"	203.2	355.6	177.8	3.05
10"	254	431.8	215.9	3.05
12"	304.8	508	254	3.05

7RWS 变径短三通



7RWS Short Reducing Weld Tee

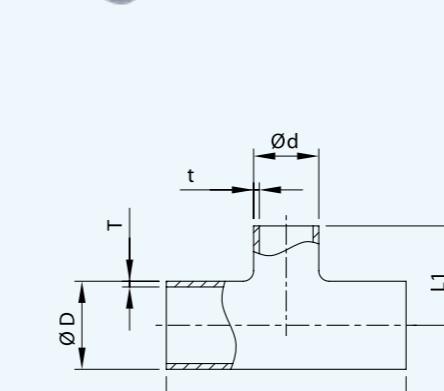

SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	95.3	15.9	1.65	1.65
1.0"*1/2"	25.4	12.7	95.5	25.4	1.65	1.65
1.0"*3/4"	25.4	19.05	95.5	28.45	1.65	1.65
1.5"*1/2"	38.1	12.7	84.2	31.75	1.65	1.65
1.5"*3/4"	38.1	19.05	84.2	35.05	1.65	1.65
1.5"*1.0"	38.1	25.4	84.2	34.9	1.65	1.65
2.0"*1/2"	50.8	12.7	104.8	38.1	1.65	1.65
2.0"*3/4"	50.8	19.05	104.8	41.4	1.65	1.65
2.0"*1.0"	50.8	25.4	104.8	41.3	1.65	1.65
2.0"*1.5"	50.8	38.1	104.8	48.4	1.65	1.65
2.5"*1.0"	63.5	25.4	119	47.6	1.65	1.65
2.5"*1.5"	63.5	38.1	119	54.8	1.65	1.65
2.5"*2.0"	63.5	50.8	119	58.7	1.65	1.65
3.0"*1.0"	76.2	25.4	131.8	54	1.65	1.65
3.0"*1.5"	76.2	38.1	131.8	61.1	1.65	1.65
3.0"*2.0"	76.2	50.8	131.8	65.1	1.65	1.65
3.0"*2.5"	76.2	63.5	131.8	65.9	1.65	1.65
4.0"*1.0"	101.6	25.4	174.6	66.7	2.1	1.65
4.0"*1.5"	101.6	38.1	174.6	73.8	2.1	1.65
4.0"*2.0"	101.6	50.8	174.6	77.8	2.1	1.65
4.0"*2.5"	101.6	63.5	174.6	78.6	2.1	1.65
4.0"*3.0"	101.6	76.2	174.6	80.2	2.1	1.65
6.0"*1.0"	152.4	25.4	254	111	2.77	1.65
6.0"*1.5"	152.4	38.1	254	114.3	2.77	1.65
6.0"*2.0"	152.4	50.8	254	117.5	2.77	1.65
6.0"*2.5"	152.4	63.5	254	120.7	2.77	1.65
6.0"*3.0"	152.4	76.2	254	123.8	2.77	1.65
6.0"*4.0"	152.4	101.6	254	130.2	2.77	2.1

7WWO 等径平口短三通

7WWO Short Equal Pull Without Straight Weld Tee

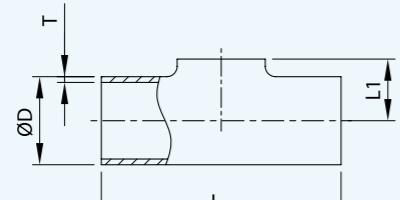

SIZE	ØD	L	L1	T
1.0"	25.4	57.2	16	1.65
1.5"	38.1	84.2	22	1.65
2.0"	50.8	104.8	29	1.65
2.5"	63.5	119	35	1.65
3.0"	76.2	131.8	41	1.65
4.0"	101.6	174.6	54	2.1

Tubo 支架



Tubing Hangers

DIN 11851 沟槽

SMS 沟槽

7WO 等径平口长三通

7WO Long Equal Pull Without Straight Weld Tee

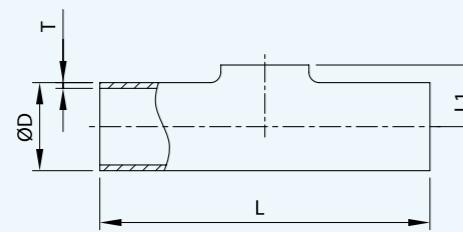

SIZE	ØD	L	L1	T
1/2"	12.7	95.2	9.35	1.65
3/4"	19.05	95.2	12.525	1.65
1.0"	25.4	95.2	16	1.65
1.5"	38.1	114.4	22	1.65
2.0"	50.8	152.4	29	1.65
2.5"	63.5	152.4	35	1.65
3.0"	76.2	165.2	41	1.65
4.0"	101.6	196.8	54	2.1

3A 管件


3A Tubular Items

3A 管件

3A Tubular Items

7RWWO 变径平口短三通


7RWWO Short Reducing Pull Without Straight Weld Tee

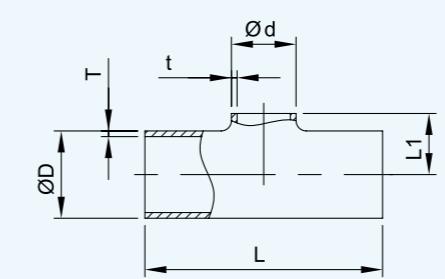

SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	57.2	12.525	1.65	1.65
1.0"*1/2"	25.4	12.7	57.2	16	1.65	1.65
1.0"*3/4"	25.4	19.05	57.2	16	1.65	1.65
1.5"*1/2"	38.1	12.7	84.2	22	1.65	1.65
1.5"*3/4"	38.1	19.05	84.2	22	1.65	1.65
1.5"*1.0"	38.1	25.4	84.2	22	1.65	1.65
2.0"*1/2"	50.8	12.7	104.8	29	1.65	1.65
2.0"*3/4"	50.8	19.05	104.8	29	1.65	1.65
2.0"*1.0"	50.8	25.4	104.8	29	1.65	1.65
2.0"*1.5"	50.8	38.1	104.8	29	1.65	1.65
2.5"*1.0"	63.5	25.4	119	35	1.65	1.65
2.5"*1.5"	63.5	38.1	119	35	1.65	1.65
2.5"*2.0"	63.5	50.8	119	35	1.65	1.65
3.0"*1.0"	76.2	25.4	131.8	41	1.65	1.65
3.0"*1.5"	76.2	38.1	131.8	41	1.65	1.65
3.0"*2.0"	76.2	50.8	131.8	41	1.65	1.65
3.0"*2.5"	76.2	63.5	131.8	41	1.65	1.65
4.0"*1.0"	101.6	25.4	235	54	2.1	1.65
4.0"*1.5"	101.6	38.1	235	54	2.1	1.65
4.0"*2.0"	101.6	50.8	235	54	2.1	1.65
4.0"*2.5"	101.6	63.5	235	54	2.1	1.65
4.0"*3.0"	101.6	76.2	235	54	2.1	1.65

7RWO 变径平口长三通

7RWO Long Reducing Pull Without Straight Weld Tee

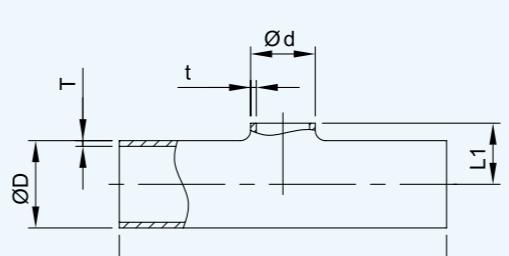


SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	95.5	12.525	1.65	1.65
1.0"*1/2"	25.4	12.7	95.5	16	1.65	1.65
1.0"*3/4"	25.4	19.05	95.5	16	1.65	1.65
1.5"*1/2"	38.1	12.7	114.3	22	1.65	1.65
1.5"*3/4"	38.1	19.05	114.3	22	1.65	1.65
1.5"*1.0"	38.1	25.4	114.3	22	1.65	1.65
2.0"*1/2"	50.8	12.7	152.4	29	1.65	1.65
2.0"*3/4"	50.8	19.05	152.4	29	1.65	1.65
2.0"*1.0"	50.8	25.4	152.4	29	1.65	1.65
2.0"*1.5"	50.8	38.1	152.4	29	1.65	1.65
2.5"*1.0"	63.5	25.4	152.4	35	1.65	1.65
2.5"*1.5"	63.5	38.1	152.4	35	1.65	1.65
2.5"*2.0"	63.5	50.8	152.4	35	1.65	1.65
3.0"*1.0"	76.2	25.4	165.1	41	1.65	1.65
3.0"*1.5"	76.2	38.1	165.1	41	1.65	1.65
3.0"*2.0"	76.2	50.8	165.1	41	1.65	1.65
3.0"*2.5"	76.2	63.5	165.1	41	1.65	1.65
4.0"*1.0"	101.6	25.4	196.8	54	2.1	1.65
4.0"*1.5"	101.6	38.1	196.8	54	2.1	1.65
4.0"*2.0"	101.6	50.8	196.8	54	2.1	1.65
4.0"*2.5"	101.6	63.5	196.8	54	2.1	1.65
4.0"*3.0"	101.6	76.2	196.8	54	2.1	1.65

3A 管件

3A Tubular Items

2KMP 45 度短夹弯头


2KMP Tri-Clamp 45° Elbow



SIZE	ØD	L	T
1/2"	12.7	19.8	1.65
3/4"	19.05	24.6	1.65
1.0"	25.4	28.5	1.65
1.5"	38.1	36.5	1.65
2.0"	50.8	44.45	1.65
2.5"	63.5	52.3	1.65
3.0"	76.2	60.3	1.65
4.0"	101.6	76.2	2.1
5.0"	127	94.71	2.77
6.0"	152.4	117.5	2.77
8.0"	203.2	147.75	3.05
10"	254	179.32	3.05
12"	304.8	210.88	3.05

2KMP 90 度短夹弯头


2KMP Tri-Clamp 90° Elbow



SIZE	ØD	L	T
1/2"	12.7	41.3	1.65
3/4"	19.05	41.3	1.65
1.0"	25.4	50.8	1.65
1.5"	38.1	69.9	1.65
2.0"	50.8	88.9	1.65
2.5"	63.5	107.95	1.65
3.0"	76.2	127	1.65
4.0"	101.6	168.2	2.1
5.0"	127	206.3	2.77
6.0"	152.4	250.8	2.77
8.0"	203.2	326.3	3.05
10"	254	402.5	3.05
12"	304.8	478.7	3.05

7MP 等径夹三通

7MP Tri-Clamp Equal Tee

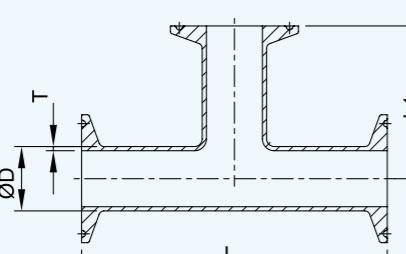



SIZE	ØD	L	L1	T
1/2"	12.7	120.6	60.3	1.65
3/4"	19.05	120.6	60.3	1.65
1.0"	25.4	120.6	60.3	1.65
1.5"	38.1	139.8	69.9	1.65
2.0"	50.8	177.8	88.9	1.65
2.5"	63.5	177.8	88.9	1.65
3.0"	76.2	190.6	95.3	1.65
4.0"	101.6	228.4	114.2	2.1
5.0"	127	317.4	158.7	2.77
6.0"	152.4	330.2	165.1	2.77
8.0"	203.2	398.6	199.3	3.05
10"	254	474.8	237.4	3.05
12"	304.8	551	275.5	3.05

3A 管件

3A Tubular Items

9WWW 短十字通



9WWW Short Equal Weld Cross



SIZE	ØD	L	T
1/2"	12.7	38.1	1.65
3/4"	19.05	57.2	1.65
1"	25.4	57.2	1.65
1.5"	38.1	84.2	1.65
2"	50.8	104.8	1.65
2.5"	63.5	119	1.65
3"	76.2	131.8	1.65
4"	101.6	174.6	2.1

9W 长十字通

9W Long Equal Weld Cross




SIZE	ØD	L	T
1/2"	12.7	95.2	1.65
3/4"	19.05	95.2	1.65
1"	25.4	95.2	1.65
1.5"	38.1	114.4	1.65
2"	50.8	152.4	1.65
2.5"	63.5	152.4	1.65
3"	76.2	165.2	1.65
4"	101.6	196.8	2.1

SMS 等径三通

SMS (ISO 2037)Tubular Items

9MP 夹式长十字通

9MP Clamp Long Cross




SIZE	ØD	L	T
1"	25.4	120.6	1.65
1.5"	38.1	139.8	1.65
2"	50.8	177.8	1.65
2.5"	63.5	177.8	1.65
3"	76.2	190.6	1.65
4"	101.6	228.4	1.65

3A 管件

3A Tubular Items

C.L31 同心大小头 (加长型)

C.L31 Concentric Reducer (Long)

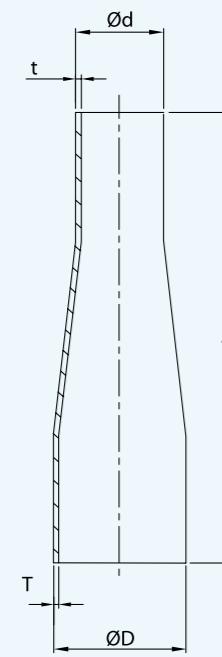


SIZE	ØD	Ød	L	T
1/2" * 1/4"	12.7	6.35	101.6	1.65
1/2" * 3/8"	12.7	9.35	101.6	1.65
3/4" * 3/8"	19.1	9.35	101.6	1.65
3/4" * 1/2"	19.1	12.70	101.6	1.65
1.0" * 1/2"	25.4	12.70	114.3	1.65
1.0" * 3/8"	25.4	9.53	114.3	1.65
1.0" * 3/4"	25.4	19.10	101.6	1.65
1.5" * 1/2"	38.1	12.70	139.7	1.65
1.5" * 3/4"	38.1	19.10	127.0	1.65
1.5" * 1.0"	38.1	25.40	127.0	1.65
2.0" * 1/2"	50.8	12.70	196.9	1.65
2.0" * 3/4"	50.8	19.10	184.2	1.65
2.0" * 1.0"	50.8	25.40	184.2	1.65
2.0" * 1.5"	50.8	38.10	133.4	1.65
2.5" * 1/2"	63.5	12.70	247.7	1.65
2.5" * 3/4"	63.5	19.10	235.0	1.65
2.5" * 1.0"	63.5	25.40	235.0	1.65
2.5" * 1.5"	63.5	38.10	184.2	1.65
2.5" * 2.0"	63.5	50.80	139.7	1.65
3.0" * 1/2"	76.2	12.70	298.5	1.65
3.0" * 1.0"	76.2	25.40	285.5	1.65
3.0" * 1.5"	76.2	38.10	235.0	1.65
3.0" * 2.0"	76.2	50.80	190.5	1.65
3.0" * 2.5"	76.2	63.50	139.7	1.65
4.0" * 1.0"	101.6	25.40	393.7	2.10
4.0" * 1.5"	101.6	38.10	342.9	2.10
4.0" * 2.0"	101.6	50.80	298.5	2.10
4.0" * 2.5"	101.6	63.50	247.7	2.10
4.0" * 3.0"	101.6	76.20	196.9	2.10
6.0" * 4.0"	152.4	101.60	254.0	2.77

3A 管件

3A Tubular Items

C.L31 偏心大小头 (加长型)

C.L31 Eccentric Reducer (Long)

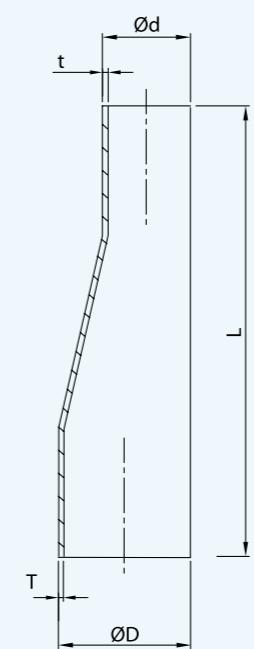

SIZE	ØD	Ød	L	T
1/2" * 3/8"	12.7	9.53	101.6	1.65
3/4" * 3/8"	19.1	12.70	101.6	1.65
1.0" * 3/8"	25.4	9.53	101.6	1.65
1.0" * 1/2"	25.4	12.70	114.3	1.65
1.0" * 3/4"	25.4	19.10	101.6	1.65
1.5" * 1/2"	38.1	12.70	139.7	1.65
1.5" * 3/4"	38.1	19.10	127.7	1.65
1.5" * 1.0"	38.1	25.40	127.7	1.65
2.0" * 1/2"	50.8	12.7	196.9	1.65
2.0" * 3/4"	50.8	19.10	184.2	1.65
2.0" * 1.0"	50.8	25.40	184.2	1.65
2.0" * 1.5"	50.8	38.10	133.4	1.65
2.5" * 1/2"	63.5	12.70	247.7	1.65
2.5" * 3/4"	63.5	19.10	235.0	1.65
2.5" * 1.0"	63.5	25.40	235.0	1.65
2.5" * 1.5"	63.5	38.10	184.2	1.65
2.5" * 2.0"	63.5	50.80	139.7	1.65
3.0" * 1/2"	76.2	12.70	298.5	1.65
3.0" * 3/4"	76.2	19.10	311.2	1.65
3.0" * 1.0"	76.2	25.40	285.8	1.65
3.0" * 1.5"	76.2	38.10	235.0	1.65
3.0" * 2.0"	76.2	50.80	190.5	1.65
3.0" * 2.5"	76.2	63.50	139.7	1.65
4.0" * 1.0"	101.6	25.40	393.7	2.10
4.0" * 1.5"	101.6	38.10	342.9	2.10
4.0" * 2.0"	101.6	50.80	298.5	2.10
4.0" * 2.5"	101.6	63.50	247.7	2.10
4.0" * 3.0"	101.6	76.20	196.9	2.10
6.0" * 4.0"	152.4	101.60	254.0	2.77


3A 管件

3A Tubular Items


短型大小头

Weld Reducer

Concentric-L31

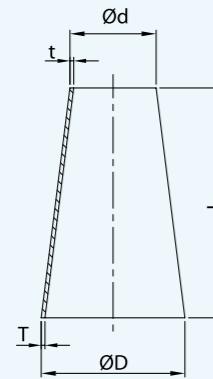

Eccentric-L32

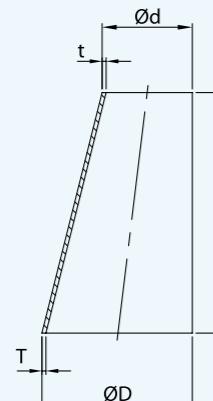

SIZE	ØD	Ød	L	T	t
3/4"*1/2"	19.05	12.7	25.4	1.65	1.65
1"*1/2"	25.4	12.7	50.8	1.65	1.65
1"*3/4"	25.4	19.05	25.4	1.65	1.65
1.5"*1/2"	38.1	12.7	101.6	1.65	1.65
1.5"*3/4"	38.1	19.05	76.2	1.65	1.65
1.5"*1"	38.1	25.4	50.8	1.65	1.65
2"*1/2"	50.8	12.7	152.4	1.65	1.65
2"*3/4"	50.8	19.05	127	1.65	1.65
2"*1"	50.8	25.4	101.6	1.65	1.65
2"*1.5"	50.8	38.1	50.8	1.65	1.65
2.5"*1"	63.5	25.4	152.4	1.65	1.65
2.5"*1.5"	63.5	38.1	101.6	1.65	1.65
2.5"*2"	63.5	50.8	50.8	1.65	1.65
3"*1"	76.2	25.4	203.2	1.65	1.65
3"*1.5"	76.2	38.1	152.4	1.65	1.65
3"*2"	76.2	50.8	101.6	1.65	1.65
3"*2.5"	76.2	63.5	50.8	1.65	1.65
4"*1"	101.6	25.4	304.8	2.1	1.65
4"*1.5"	101.6	38.1	254	2.1	1.65
4"*2"	101.6	50.8	203.2	2.1	1.65
4"*2.5"	101.6	63.5	152.4	2.1	1.65
4"*3"	101.6	76.2	101.6	2.1	1.65
6"*2"	152.4	50.8	139.7	2.77	1.65
6"*2.5"	152.4	63.5	139.7	2.77	1.65
6"*3"	152.4	76.2	139.7	2.77	1.65
6"*4"	152.4	101.6	139.7	2.77	2.1


3A 管件

3A Tubular Items


夹式大小头

Tri-Clamp Reducer

Concentric-L31-14MP

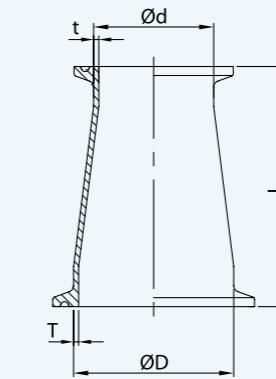

Eccentric-L32-14MP

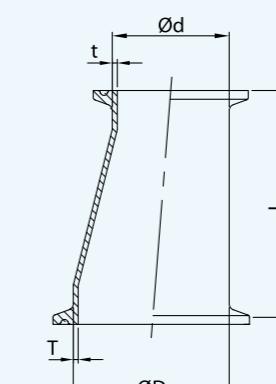

SIZE	ØD	Ød	L	T	t
3/4"*1/2"	19.05	12.7	50.8	1.65	1.65
1"*1/2"	25.4	12.7	76.2	1.65	1.65
1"*3/4"	25.4	19.05	50.8	1.65	1.65
1.5"*1/2"	38.1	12.7	127	1.65	1.65
1.5"*3/4"	38.1	19.05	101.6	1.65	1.65
1.5"*1"	38.1	25.4	76.2	1.65	1.65
2"*1/2"	50.8	12.7	177.8	1.65	1.65
2"*3/4"	50.8	19.05	152.4	1.65	1.65
2"*1"	50.8	25.4	127	1.65	1.65
2.5"*1"	63.5	25.4	177.8	1.65	1.65
2.5"*2"	63.5	50.8	76.2	1.65	1.65
2.5"*1.5"	63.5	38.1	228.6	1.65	1.65
2.5"*1.5"	63.5	38.1	177.8	1.65	1.65
2.5"*1.5"	63.5	38.1	130.1	2.1	1.65
2.5"*2.5"	63.5	76.2	180.9	2.1	1.65
3"*1"	76.2	25.4	282.5	2.1	1.65
3"*1.5"	76.2	38.1	231.7	2.1	1.65
3"*2"	76.2	50.8	173.9	2.77	1.65
3"*2.5"	76.2	63.5	130.1	2.1	1.65
4"*1.0"	101.6	25.4	333.3	2.1	1.65
4"*1.5"	101.6	38.1	282.5	2.1	1.65
4"*2"	101.6	50.8	231.7	2.1	1.65
4"*2.5"	101.6	63.5	180.9	2.1	1.65
4"*3"	101.6	76.2	130.1	2.1	1.65
6"*2"	152.4	50.8	173.9	2.77	1.65
6"*2.5"	152.4	63.5	130.1	2.1	1.65
6"*3"	152.4	76.2	173.9	2.77	1.65
6"*4"	152.4	101.6	177	2.77	2.1

3A 管件

3A Tubular Items

重-duty 卡箍

Heavy Duty Clamp-Rings



Ferrule Adapters

Tubing Hangers

DIN 11851 Unions

SMS Unions

SMS ISO 2037 Tubular Items

SMS ISO 2037 Unions


BPE Fittings

SMS 管件

SMS (ISO 2037)Tubular Items

L2KS1D 45 度长弯头


L2KS1D Long 45° Elbow



SIZE	ØD	L	T
DN25	25	42.33	1.2
DN38	38	48.72	1.2
DN50	51	58.15	1.2
DN63	63.5	75.3	1.6
DN76	76.1	79.37	1.6
DN100	101.6/104	85.54	2

2WCL 90 度短弯头


2WCL Short 90° Elbow



SIZE	ØD	L	T
DN25	25	37.5	1.2
DN38	38	57	1.2
DN50	51	76.5	1.2
DN63	63.5	95.25	1.6
DN76	76.1	114.15	1.6
DN100	101.6/104	152.1	2

L2S1D 90 度长弯头

L2S1D Long 90° Elbow





SIZE	ØD	L	T
DN25	25	55	1.2
DN38	38	70	1.2
DN50	51	82	1.2
DN63	63.5	105	1.6
DN76	76.1	110	1.6
DN100	101.6/104	150	2

SMS 管件

SMS (ISO 2037)Tubular Items



SMS 7W 等径长三通

SMS 7W Tee With Straight-End

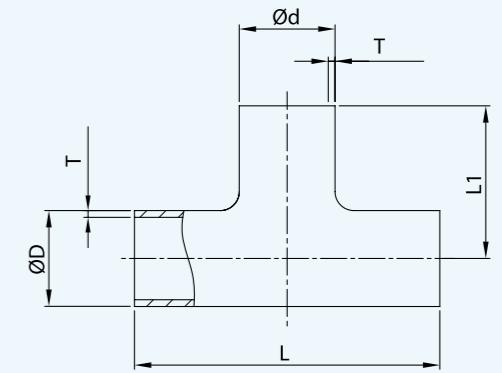



SMS 7WO 等径平口三通

SMS 7WO Tee Without Straight-End

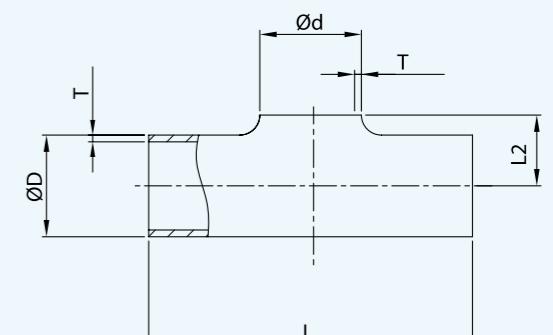

SMS 9WO 等径平口四通

SMS 9WO Welding Cross Without Straight-End

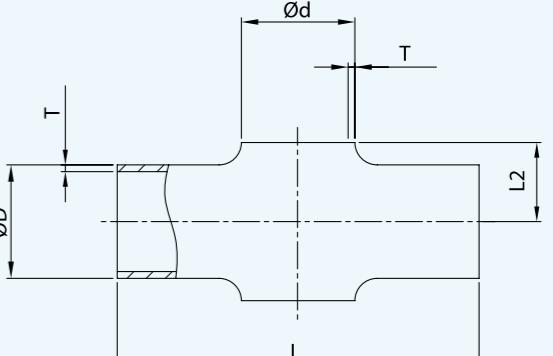



SIZE	ØD	Ød	L	L1	L2	T
DN25	25	25	110	55	14	1.2
DN38	38	38	140	70	21	1.2
DN50	51	51	164	82	28.5	1.2
DN63	63.5	63.5	210	105	36	1.6
DN76	76.1	76.1	220	110	43	1.6
DN100	104	104	300	150	58	2

SMS 管件

SMS (ISO 2037)Tubular Items

SMS 变径长三通

SMS Long Reducing Weld Tee

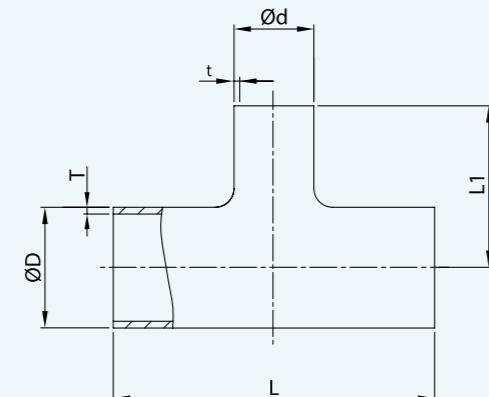



SIZE	D	d	L	L1	T	t
25 * 1/2"	25	12.7	110	26.5	1.2	1.65
25 * 3/4"	25	19.05	110	26.5	1.2	1.65
38 * 1/2"	38	12.7	140	33.7	1.2	1.65
38 * 3/4"	38	19.05	140	33.7	1.2	1.65
38 * 25	38	25	140	33.7	1.2	1.2
51 * 1/2"	51	12.7	164	41.7	1.2	1.65
51 * 3/4"	51	19.05	164	41.7	1.2	1.65
51 * 25	51	25	164	41.7	1.2	1.2
51 * 38	51	38	164	41.7	1.2	1.2
63.5 * 1/2"	63.5	12.7	210	47.95	1.6	1.65
63.5 * 3/4"	63.5	19.05	210	47.95	1.6	1.65
63.5 * 25	63.5	25	210	47.95	1.6	1.2
63.5 * 38	63.5	38	210	47.95	1.6	1.2
63.5 * 51	63.5	51	210	47.95	1.6	1.2
76.1 * 1/2"	76.1	12.7	220	53.2	1.6	1.65
76.1 * 3/4"	76.1	19.05	220	53.2	1.6	1.65
76.1 * 25	76.1	25	220	53.2	1.6	1.2
76.1 * 38	76.1	38	220	53.2	1.6	1.2
76.1 * 51	76.1	51	220	53.2	1.6	1.2
76.1 * 63.5	76.1	63.5	220	53.2	1.6	1.6
101.6 * 25	101.6	25	300	67.5	2	1.2
101.6 * 38	101.6	38	300	67.5	2	1.2
101.6 * 51	101.6	51	300	67.5	2	1.2
101.6 * 63.5	101.6	63.5	300	67.5	2	1.6
101.6 * 76.1	101.6	76.1	300	67.5	2	1.6

SMS 管件

SMS (ISO 2037)Tubular Items


7RWO 变径平口三通

7RWO Welding Reducing Tee Without Straight-End

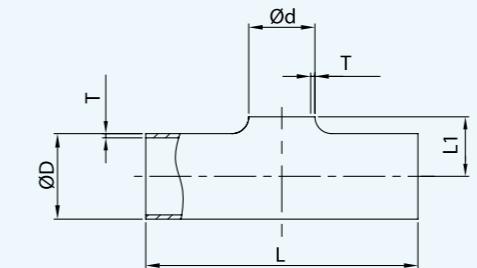

SIZE	ØD	Ød	L	L1	T
38*25	38	25	140	21	1.2
50*25	51	25	164	29	1.2
50*38	51	38	164	29	1.2
63*25	63.5	25	210	34.5	1.6
63*38	63.5	38	210	35	1.6
63*50	63.5	51	210	36	1.6
76*25	76.1	25	220	41	1.6
76*38	76.1	38	220	42	1.6
76*50	76.1	51	220	43	1.6
76*63	76.1	63.5	220	43	1.6
100*25	101.6	25	300	56	2
100*38	101.6	38	300	56	2
100*50	101.6	51	300	57	2
100*63	101.6	63.5	300	58	2
100*76	101.6	76.1	300	58	2

SMS 单卡 U型三通 /SMS 短直部 U型三通

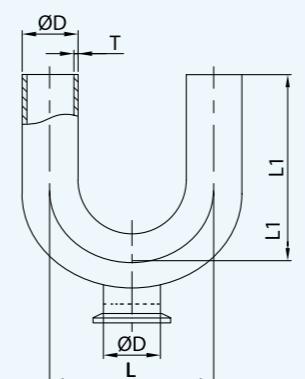SMS U-Tee ends Weld/Ferrule/Weld
SMS U-Tee Weld/Ferrule/Weld(Short Straight Part)


SIZE	ØD	Ød	L1	L
25*1/2"	25.0	12.7	114.3	75
25*3/4"	25.0	19.05	114.3	75
25*25	25.0	25.0	114.3	75
38*1/2"	38.0	12.7	152.4	114
38*3/4"	38.0	19.05	152.4	114
38*25	38.0	25.0	152.4	114
38*38	38.0	38.0	152.4	114
51*1/2"	51.0	12.7	152.4	152.4
51*3/4"	51.0	19.05	152.4	152.4
51*25	51.0	25.0	152.4	152.4
51*38	51.0	38.0	152.4	152.4
51*51	51.0	51.0	152.4	152.4
63.5*25	63.5	25.0	190.5	194.0

SMS 管件

SMS (ISO 2037)Tubular Items

SMS 短出口单卡异径三通


SMS Reducing Tee ends Weld/Ferrule/Weld(Low neck)

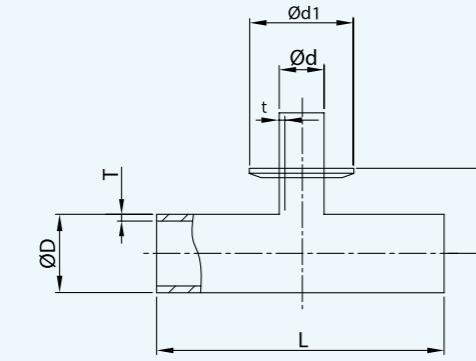

SIZE	D	d	L	L1	T	t	d1
25 * 1/2"	25	12.7	110	26.5	1.2	1.65	25
25 * 3/4"	25	19.05	110	26.5	1.2	1.65	25
38 * 1/2"	38	12.7	140	33.7	1.2	1.65	25
38 * 3/4"	38	19.05	140	33.7	1.2	1.65	25
38 * 25	38	25	140	33.7	1.2	1.2	50.5
51 * 1/2"	51	12.7	164	41.7	1.2	1.65	25
51 * 3/4"	51	19.05	164	41.7	1.2	1.65	25
51 * 25	51	25	164	41.7	1.2	1.2	50.5
51 * 38	51	38	164	41.7	1.2	1.2	50.5
63.5 * 1/2"	63.5	12.7	210	47.95	1.6	1.65	25
63.5 * 3/4"	63.5	19.05	210	47.95	1.6	1.65	25
63.5 * 25	63.5	25	210	47.95	1.6	1.2	50.5
63.5 * 38	63.5	38	210	47.95	1.6	1.2	50.5
63.5 * 51	63.5	51	210	47.95	1.6	1.2	64
76.1 * 1/2"	76.1	12.7	220	53.2	1.6	1.65	25
76.1 * 3/4"	76.1	19.05	220	53.2	1.6	1.65	25
76.1 * 25	76.1	25	220	53.2	1.6	1.2	50.5
76.1 * 38	76.1	38	220	53.2	1.6	1.2	50.5
76.1 * 51	76.1	51	220	53.2	1.6	1.2	64
76.1 * 63.5	76.1	63.5	220	53.2	1.6	1.6	77.5
101.6 * 25	101.6	25	300	67.5	2	1.2	50.5
101.6 * 38	101.6	38	300	67.5	2	1.2	50.5
101.6 * 51	101.6	51	300	67.5	2	1.2	64
101.6 * 63.5	101.6	63.5	300	67.5	2	1.6	77.5
101.6 * 76.1	101.6	76.1	300	67.5	2	1.6	91

SMS 短出口单卡等径三通

SMS Tee ends Weld/Ferrule/Weld

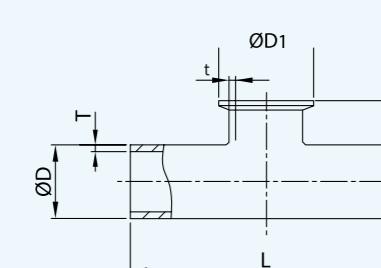


SIZE	L	$\varnothing D$	L1	T/t	D1
25	110	25	26.7	1.2	50.5
38	140	38	33.7	1.2	50.5
51	164	51	41.2	1.2	64
63	210	63.5	48	1.6	50.5
76	220	76.1	54.2	1.6	91
101.6	300	101.6	70.5	2	119

SMS 大小头

SMS (ISO 2037)Tubular Items


SMS L31 同心平口大小头

Weld Reducer




SMS L31SE 短同心大小头

Weld Reducer

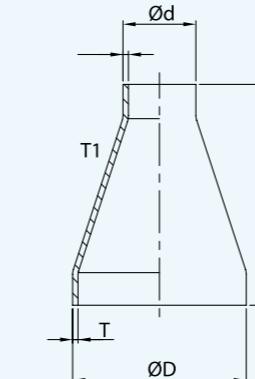


SMS L32 偏心平口大小头

Weld Reducer



SMS L32SE 短偏心大小头

Weld Reducer

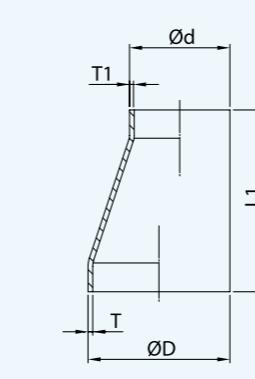


SIZE	$\varnothing D$	$\varnothing d$	L	L1	T	T1
38*25	38	25	39	46	1.2	1.2
50*25	51	25	57	68	1.2	1.2
50*38	51	38	39	47	1.2	1.2
63*25	63.5	25	74	92	1.6	1.2
63*38	63.5	38	57	70	1.6	1.2
63*50	63.5	51	39	44	1.6	1.2
76*25	76.1	25	92	—	1.6	1.2
76*38	76.1	38	74	92	1.6	1.2
76*50	76.1	51	57	68	1.6	1.2
76*63	76.1	63.5	39	47	1.6	1.6
100*50	101.6	51	95	117	2	1.2
100*63	101.6	63.5	78	94	2	1.6
100*76	101.6	76.1	60	74	2	1.6

SMS 大 小 头

SMS (ISO 2037)Tubular Items

SMS 同心大小头 (加长型)


SMS Concentric Reducers(Long)

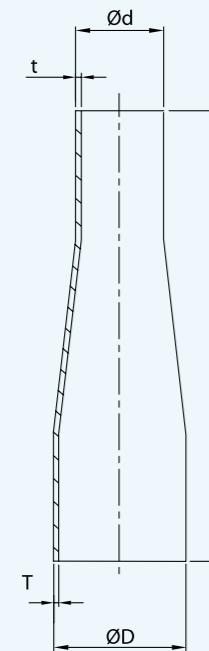

SIZE	ØD	Ød	L	T	T1
25*3/4"	25	19.05	101	1.2	1.65
38*3/4"	38	19.05	110	1.2	1.65
38*25	38	25	106	1.2	1.2
51*25	51	25	128	1.2	1.2
51*38	51	38	107	1.2	1.2
63.5*25	63.5	25	150	1.6	1.2
63.5*38	63.5	38	130	1.6	1.2
63.5*51	63.5	51	104	1.6	1.2
76.1*38	76.1	38	149	1.6	1.2
76.1*51	76.1	51	128	1.6	1.2
76.1*63.5	76.1	63.5	107	1.6	1.6
101.6*51	101.6	51	177	2	1.2
101*63.5	101.6	63.5	154	2	1.6
101*76	101.6	76.1	134	2	1.6

SMS 偏心大小头 (加长型)

SMS Eccentric Reducers(Long)

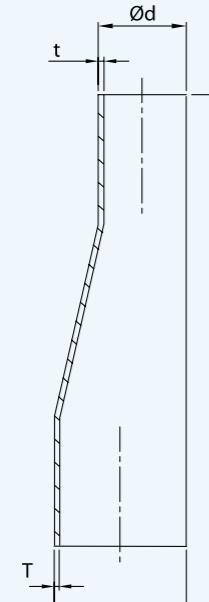

SIZE	ØD	Ød	L	T	T1
25*3/4"	25	19.05	85	1.2	1.65
38*3/4"	38	19.05	85	1.2	1.65
38*25	38	25	99	1.2	1.2
51*25	51	25	117	1.2	1.2
51*38	51	38	99	1.2	1.2
63.5*25	63.5	25	134	1.6	1.2
63.5*38	63.5	38	117.5	1.6	1.2
63.5*51	63.5	51	99	1.6	1.2
76.1*38	76.1	38	152	1.6	1.2
76.1*51	76.1	51	134	1.6	1.2
76.1*63.5	76.1	63.5	117	1.6	1.6
101.6*51	101.6	51	99	2	1.2
101*63.5	101.6	63.5	138	2	1.6
101*76	101.6	76.1	120	2	1.6

BPE 管件与配件**BPE Pharmaceutical Fittings**


高洁净管道和管径 (ASME BPE 标准)

High Purity Tube & Fitting Valve (ASME BPE Standard)



高洁净管道和管径 (ASME BPE 标准)

High Purity Tube & Fitting Valve (ASME BPE Standard)



一般注意事项

E 端至端和中心至末端的公差: 1.27mm

中心线半径 (CLR) 的误差为公称尺寸的 ±10%。

General Notes:

Tolerance on E end-to-end and center-to-end: 1.27mm

Toerance for centerline radius (CLR) is ±10% of the nominal dimension.

尺寸和公差对照表:

Dimension & Tolerance:


尺寸 SIZE	OD	壁厚 Wall thickness		切线 B 的垂直度 Squareness face To tangent, B	角偏离 Off angle O	面偏离 Off angle P
		机械抛光 Mechanically polished	电解抛光 Electropolished			
1/2"	±0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.36	0.76
3/4"	±0.13	+0.13/-0.2	+0.13/-0.25	0.13	0.46	0.76
1.0"	±0.13	+0.13/-0.2	+0.13/-0.25	0.2	0.64	0.76
1.5"	±0.2	+0.13/-0.2	+0.13/-0.25	0.2	0.86	1.27
2.0"	±0.2	+0.13/-0.2	+0.13/-0.25	0.2	1.09	1.27
2.5"	±0.25	+0.13/-0.2	+0.13/-0.25	0.25	1.37	1.27
3.0"	±0.25	+0.13/-0.2	+0.13/-0.25	0.41	1.73	1.27
4.0"	±0.38	+0.2/-0.25	+0.2/-0.30	0.41	2.18	1.52

表面粗糙度对照表:

Surface options:

管道的 Ra 读数 Ra Reading for Tubing					
如图纸和 / 或机械抛光 As drawing and/or mechanically polished		机械抛光和电解抛光或电解抛光 Mechanically Polished and Electropolished or Electropolished			
表面名称 Surface Designation	Ra 平均值 Ra Average		表面名称 Surface Designation	Ra 平均值 Ra Average	
	μ-in	μ-m		μ-in	μ-m
SF1	15	0.5	SF4	10	0.375
SF2	20	0.625	SF5	15	0.5
SF3	20	0.625	SF6	15	0.5

配件的 Ra 读数 Ra Reading for Fitting					
机械抛光 Mechanically polished		机械抛光和电解抛光 Mechanically Polished and Electropolished			
表面名称 Surface Designation	Ra 平均值 Ra Average		表面名称 Surface Designation	Ra 平均值 Ra Average	
	μ-in	μ-m		μ-in	μ-m
SF1	20	0.5	SF4	15	0.38
SF2	25	0.63	SF5	20	0.5
SF3	30	0.76	SF6	25	0.63

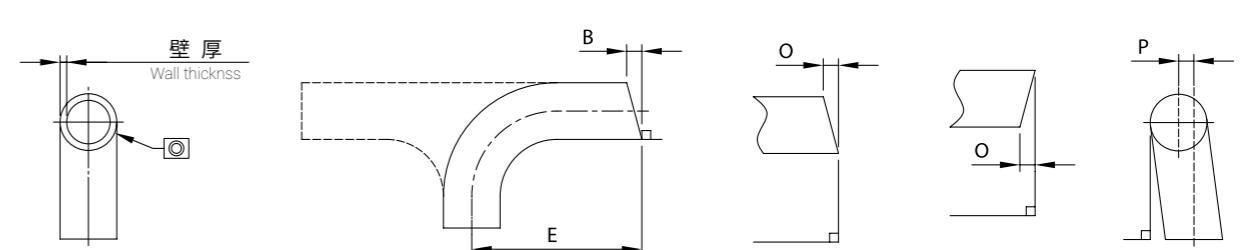管件表面粗糙度: Ra ≤ 32uin(0.8μm)
Outer surface:Tubes and fittings RA ≤ 32uin(0.8μm)

BPE 不锈钢管

BPE Stainless Steel Tubing

- 药品和超高分子行业的整个生产周期必须在绝对卫生的环境中。内表面光滑的管材、管件和阀门具有易清洁和避免细菌污染的优点，因此它们被广泛使用。

我司仅提供按照卫生设备设计的最高标准制造、质量控制、标记和认证的管材，并保证扩展的质量和可追溯性。我司 BPE 管仅使用最优质的不锈钢材料，显著减少了安装前的检查要求。

我司可直接提供 TP316L 不锈钢管，其低硫含量为 0.005% 至 0.0017%，表面处理为 SF1 和 SF4 (ASME BPE 规范)。

- Absolutely hygienic conditions are necessary for the entire production cycle of pharmaceutical and ultra-high industries. Therefore, tubes, fittings, and valves with a smooth internal surface are extensively installed with the advantages of cleaning easily and avoiding bacteria contamination.

Our only offers tubes that are manufactured, quality controlled, marked, and certified according to the highest standards for hygienic equipment design and guarantees extended quality and traceability.

Our BPE tubing significantly reduces inspection requirements prior to installation by utilizing only the highest quality stainless steel materials.

Our delivers directly from stock the following stainless steel tubes in grade TP316L with low sulfur content of 0.005% to 0.0017% and SF1 and SF4 finishes(according to the ASME BPE specification).



■ 标准: ASTM A270-2015 S2

■ 表面处理: SF0~SF6

SF1 ID Pol. Ra < 0.5μm/OD Pol. Ra < 0.8μm

SF4 ID EP Finished Ra < 0.38μm/OD Pol. Ra < 0.8μm

■ 日嘉BPE EP产品具有以下优点:

EP层覆盖均匀, 能最大限度地减少磨损

铬浓度更高, 耐腐蚀性更强

内表面光滑, 避免细菌污染

■ Standards: ASTM A270-2015 S2

■ Surface finish: SF0~SF6

SF1 ID Pol. Ra < 0.5μm/OD Pol. Ra < 0.8μm


SF4 ID EP Finished Ra < 0.38μm/OD Pol. Ra < 0.8μm

■ Rijia BPE EP products with following advantages:

Homogeneously EP layer to minimize rouging

Higher chrome concentration for better corrosion resistance

Guaranteed smoothness of all internal surfaces to reduce Bio film

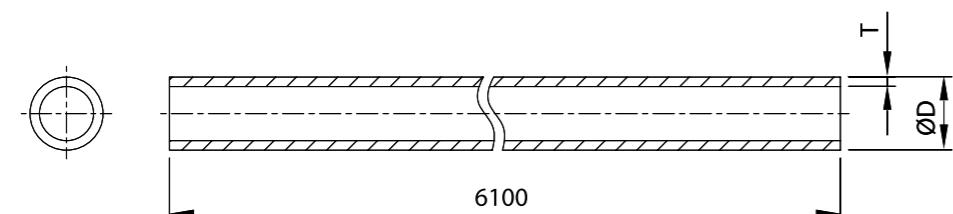


SIZE	1/8"	1/4"	3/8"	1/2"	3/4"	1.0"	1.5"	2.0"	2.5"	3.0"	4.0"	6.0"
ØD	3.18	6.35	9.53	12.7	19.05	25.4	38.1	50.8	63.5	76.2	101.6	152.4
T	0.56	0.89	0.89	1.65	1.65	1.65	1.65	1.65	1.65	2.11	2.11	2.77

BPE 管件

BPE Fittings

90 度长弯头


DT-4.1.1-1 Long Weld 90° Elbow (DT-7)

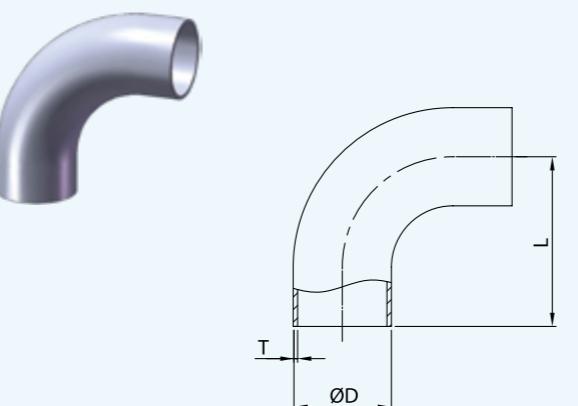

SIZE	ØD	L	T
1/2"	12.7	76.2	1.65
3/4"	19.05	76.2	1.65
1"	25.4	76.2	1.65
1.5"	38.1	95.25	1.65
2"	50.8	120.65	1.65
2.5"	63.5	139.7	1.65
3"	76.2	158.75	1.65
4"	101.6	203.2	2.11
6"	152.4	292.1	2.77

45 度长弯头

DT-4.1.1-4 Long 45° Elbow (DT-8)

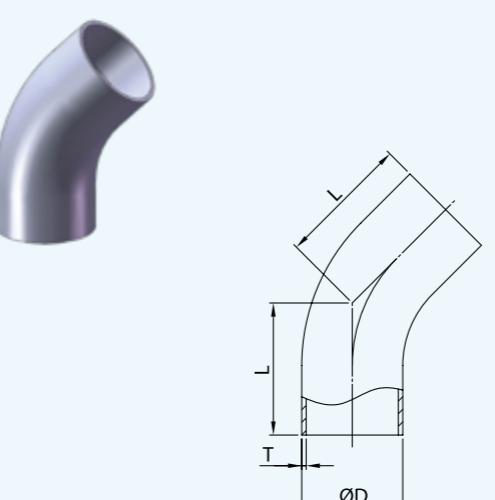


SIZE	ØD	L	T
1/2"	12.7	57.15	1.65
3/4"	19.05	57.15	1.65
1"	25.4	57.15	1.65
1.5"	38.1	63.5	1.65
2"	50.8	76.2	1.65
2.5"	63.5	85.73	1.65
3"	76.2	92.08	1.65
4"	101.6	114.3	2.11
6"	152.4	158.75	2.77

BPE 管件

BPE Fittings

四通


DT-4.1.2-1C Cross (DT-9)



SIZE	ØD	L	T
1/2"	12.7	95.26	1.65
3/4"	19.05	101.6	1.65
1"	25.4	107.96	1.65
1.5"	38.1	120.66	1.65
2"	50.8	146.06	1.65
2.5"	63.5	158.76	1.65
3"	76.2	171.46	1.65
4"	101.6	209.56	2.11
6"	152.4	285.76	2.77

等径三通

DT-4.1.2-1T Tee (DT-9)

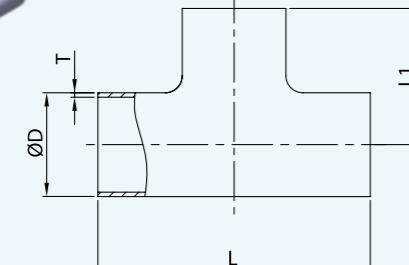



SIZE	ØD	L	L1	T
1/2"	12.7	95.26	47.63	1.65
3/4"	19.05	101.6	50.8	1.65
1"	25.4	107.96	53.98	1.65
1.5"	38.1	120.66	60.33	1.65
2"	50.8	146.06	73.03	1.65
2.5"	63.5	158.76	79.38	1.65
3"	76.2	171.46	85.73	1.65
4"	101.6	209.56	104.78	2.11
6"	152.4	285.76	142.88	2.77

BPE 管件

BPE Fittings

同心大小头

DT-4.1.3-1 Concentric Reducer (DT11)

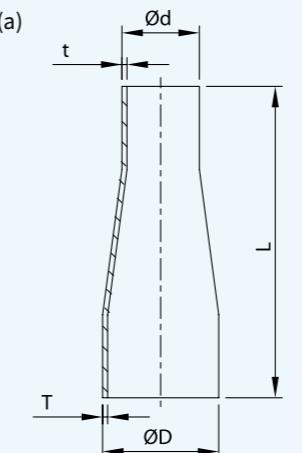



SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0"*1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0"*3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5"*1/2"	38.1	12.7	139.7	76.2	1.65	1.65
1.5"*3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5"*1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0"*1/2"	50.8	12.7	196.9	85.73	1.65	1.65
2.0"*3/4"	50.8	19.05	184.2	85.73	1.65	1.65
2.0"*1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0"*1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5"*1/2"	63.5	12.7	247.7	—	1.65	1.65
2.5"*3/4"	63.5	19.05	235	—	1.65	1.65
2.5"*1.0"	63.5	25.4	235	85.73	1.65	1.65
2.5"*1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5"*2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0"*1.0"	76.2	25.4	285.8	107.95	1.65	1.65
3.0"*1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0"*2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0"*2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0"*1.0"	101.6	25.4	393.7	—	2.11	1.65
4.0"*1.5"	101.6	38.1	342.9	—	2.11	1.65
4.0"*2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0"*2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0"*3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0"*3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0"*4.0"	152.4	101.6	254	142.88	2.77	2.11

BPE 管件

BPE Fittings

偏心大小头

DT-4.1.3-1 Eccentric Reducer (DT11)

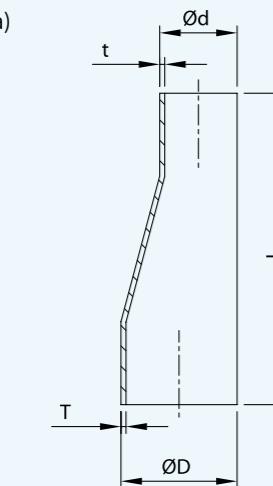


SIZE	ØD	Ød	L	L1	T	t
3/4" * 1/2"	19.05	12.7	101.6	53.93	1.65	1.65
1.0" * 1/2"	25.4	12.7	114.3	63.5	1.65	1.65
1.0" * 3/4"	25.4	19.05	101.6	53.93	1.65	1.65
1.5" * 1/2"	38.1	12.7	139.7	76.2	1.65	1.65
1.5" * 3/4"	38.1	19.05	127	76.2	1.65	1.65
1.5" * 1.0"	38.1	25.4	127	63.5	1.65	1.65
2.0" * 1/2"	50.8	12.7	196.9	85.73	1.65	1.65
2.0" * 3/4"	50.8	19.05	184.2	85.73	1.65	1.65
2.0" * 1.0"	50.8	25.4	184.2	85.73	1.65	1.65
2.0" * 1.5"	50.8	38.1	133.4	63.5	1.65	1.65
2.5" * 1/2"	63.5	12.7	247.7	—	1.65	1.65
2.5" * 3/4"	63.5	19.05	235	—	1.65	1.65
2.5" * 1.0"	63.5	25.4	235	85.73	1.65	1.65
2.5" * 1.5"	63.5	38.1	184.2	85.73	1.65	1.65
2.5" * 2.0"	63.5	50.8	139.7	63.5	1.65	1.65
3.0" * 1.0"	76.2	25.4	285.8	107.95	1.65	1.65
3.0" * 1.5"	76.2	38.1	235	107.95	1.65	1.65
3.0" * 2.0"	76.2	50.8	190.5	85.73	1.65	1.65
3.0" * 2.5"	76.2	63.5	139.7	66.68	1.65	1.65
4.0" * 1.0"	101.6	25.4	393.7	—	2.11	1.65
4.0" * 1.5"	101.6	38.1	342.9	—	2.11	1.65
4.0" * 2.0"	101.6	50.8	298.5	130.18	2.11	1.65
4.0" * 2.5"	101.6	63.5	247.7	107.95	2.11	1.65
4.0" * 3.0"	101.6	76.2	196.9	98.43	2.11	1.65
6.0" * 3.0"	152.4	76.2	—	184.15	2.77	1.65
6.0" * 4.0"	152.4	101.6	254	142.88	2.77	2.11

BPE 管件

BPE Fittings

90 度单夹弯头


DT-4.1.1-2 90° Clamp/Weld Elbow (DT-12)

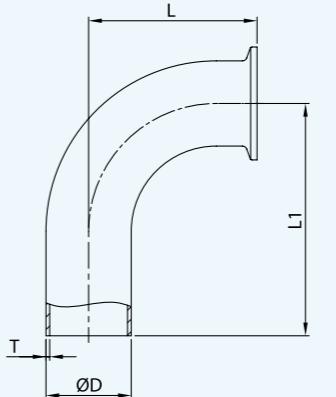

SIZE	ØD	L	L1	T
1/2"	12.7	41.28	76.2	1.65
3/4"	19.05	41.28	76.2	1.65
1"	25.4	50.8	76.2	1.65
1.5"	38.1	69.85	95.25	1.65
2"	50.8	88.9	120.65	1.65
2.5"	63.5	107.95	139.7	1.65
3"	76.2	127	158.75	1.65
4"	101.6	168.28	203.2	2.11
6"	152.4	266.7	292.1	2.77

45 度单夹弯头


DT-4.1.1-5 45° Clamp/Weld Elbow (DT-13)

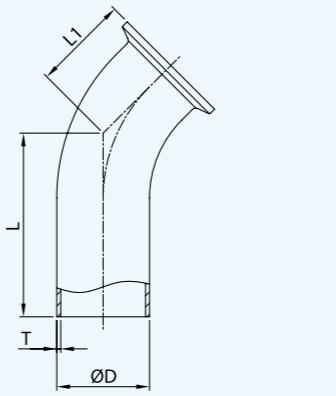

SIZE	ØD	L	L1	T
1/2"	12.7	57.15	25.4	1.65
3/4"	19.05	57.15	25.4	1.65
1"	25.4	57.15	28.58	1.65
1.5"	38.1	63.5	36.53	1.65
2"	50.8	76.2	44.45	1.65
2.5"	63.5	85.73	52.4	1.65
3"	76.2	92.08	60.33	1.65
4"	101.6	114.3	79.38	2.11
6"	152.4	158.75	133.35	2.77

90 度夹式弯头

DT-4.1.1-3 90° Clamp Elbow (DT-16)




SIZE	ØD	L	T
1/2"	12.7	41.28	1.65
3/4"	19.05	41.28	1.65
1"	25.4	50.8	1.65
1.5"	38.1	69.85	1.65
2"	50.8	88.9	1.65
2.5"	63.5	107.95	1.65
3"	76.2	127	1.65
4"	101.6	168.28	2.11
6"	152.4	266.7	2.77

BPE 管件

BPE Fittings

45 度夹式弯头



DT-4.1.1-6 45° Clamp Elbow (DT-17)



SIZE	ØD	L	T
1/2"	12.7	25.4	1.65
3/4"	19.05	25.4	1.65
1"	25.4	28.58	1.65
1.5"	38.1	36.5	1.65
2"	50.8	44.45	1.65
2.5"	63.5	52.4	1.65
3"	76.2	60.33	1.65
4"	101.6	79.38	2.11
6"	152.4	133.35	2.77

变径三通

DT-4.1.2-6 Reducing Tee (DT-10)

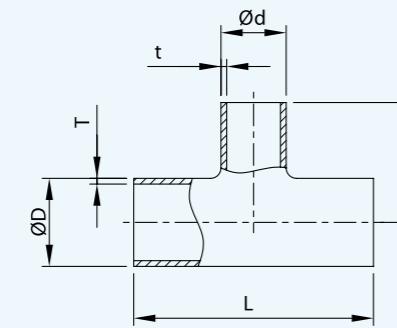


SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	101.6	50.8	1.65	1.65
1**1/2"	25.4	12.7	107.96	53.98	1.65	1.65
1**3/4"	25.4	19.05	107.96	53.98	1.65	1.65
1.5**1/2"	38.1	12.7	120.66	60.33	1.65	1.65
1.5**3/4"	38.1	19.05	120.66	60.33	1.65	1.65
1.5**1"	38.1	25.4	120.66	60.33	1.65	1.65
2**1/2"	50.8	12.7	146.06	66.68	1.65	1.65
2**3/4"	50.8	19.05	146.06	66.68	1.65	1.65
2**1"	50.8	25.4	146.06	66.68	1.65	1.65
2**1.5"	50.8	38.1	146.06	66.68	1.65	1.65
2.5**1/2"	63.5	12.7	158.76	73.03	1.65	1.65
2.5**3/4"	63.5	19.05	158.76	73.03	1.65	1.65
2.5**1"	63.5	25.4	158.76	73.03	1.65	1.65
2.5**1.5"	63.5	38.1	158.76	73.03	1.65	1.65
2.5**2"	63.5	50.8	158.76	73.03	1.65	1.65
3**1/2"	76.2	12.7	171.46	79.38	1.65	1.65
3**3/4"	76.2	19.05	171.46	79.38	1.65	1.65
3**1"	76.2	25.4	171.46	79.38	1.65	1.65
3**1.5"	76.2	38.1	171.46	79.38	1.65	1.65
3**2"	76.2	50.8	171.46	79.38	1.65	1.65
3**2.5"	76.2	63.5	171.46	79.38	1.65	1.65
4**1/2"	101.6	12.7	209.56	92.08	2.11	1.65
4**3/4"	101.6	19.05	209.56	92.08	2.11	1.65
4**1"	101.6	25.4	209.56	92.08	2.11	1.65
4**1.5"	101.6	38.1	209.56	92.08	2.11	1.65
4**2"	101.6	50.8	209.56	92.08	2.11	1.65
4**2.5"	101.6	63.5	209.56	92.08	2.11	1.65
4**3"	101.6	76.2	209.56	92.08	2.11	1.65
4**4"	101.6	101.6	209.56	130.18	2.11	2.11
6**3"	152.4	76.2	285.76	123.83	2.77	1.65
6**4"	152.4	101.6	285.76	130.18	2.77	2.11

BPE 管件

BPE Fittings

短出口单夹变径三通

DT-4.1.2-7 Short Outlet W/C Reducing Tee (DT-14)

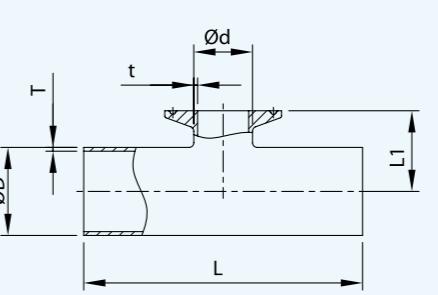


SIZE	ØD	Ød	L	L1	T	t
3/4"*1/2"	19.05	12.7	101.6	25.4	1.65	1.65
1**1/2"	25.4	12.7	107.96	28.58	1.65	1.65
1**3/4"	25.4	19.05	107.96	34.93	1.65	1.65
1.5**1/2"	38.1	12.7	120.66	34.93	1.65	1.65
1.5**3/4"	38.1	19.05	120.66	34.93	1.65	1.65
1.5**1"	38.1	25.4	120.66	34.93	1.65	1.65
2**1/2"	50.8	12.7	146.06	41.28	1.65	1.65
2**3/4"	50.8	19.05	146.06	41.28	1.65	1.65
2**1"	50.8	25.4	146.06	41.28	1.65	1.65
2**1.5"	50.8	38.1	146.06	41.28	1.65	1.65
2.5**1/2"	63.5	12.7	158.76	47.63	1.65	1.65
2.5**3/4"	63.5	19.05	158.76	47.63	1.65	1.65
2.5**1"	63.5	25.4	158.76	47.63	1.65	1.65
2.5**1.5"	63.5	38.1	158.76	47.63	1.65	1.65
2.5**2"	63.5	50.8	158.76	47.63	1.65	1.65
3**1/2"	76.2	12.7	171.46	53.98	1.65	1.65
3**3/4"	76.2	19.05	171.46	53.98	1.65	1.65
3**1"	76.2	25.4	171.46	53.98	1.65	1.65
3**1.5"	76.2	38.1	171.46	53.98	1.65	1.65
3**2"	76.2	50.8	171.46	53.98	1.65	1.65
3**2.5"	76.2	63.5	171.46	53.98	1.65	1.65
4**1/2"	101.6	12.7	209.56	66.68	2.11	1.65
4**3/4"	101.6	19.05	209.56	66.68	2.11	1.65
4**1"	101.6	25.4	209.56	66.68	2.11	1.65
4**1.5"	101.6	38.1	209.56	66.68	2.11	1.65
4**2"	101.6	50.8	209.56	66.68	2.11	1.65
4**2.5"	101.6	63.5	209.56	66.68	2.11	1.65
4**3"	101.6	76.2	209.56	66.68	2.11	1.65
4**4"	101.6	101.6	209.56	92.25	2.77	2.11
6**3/4"	152.4	19.05	285.76	92.08	2.77	1.65
6**1"	152.4	25.4	285.76	92.08	2.77	1.65
6**1.5"	152.4	38.1	285.76	92.08	2.77	1.65
6**2"	152.4	50.8	285.76	92.08	2.77	1.65
6**2.5"	152.4	63.5	285.76	92.08	2.77	1.65
6**3"	152.4	76.2	285.76	92.08	2.77	1.65
6**4"	152.4	101.6	285.76	92.25	2.77	2.11

BPE 管件

BPE Fittings

短出口单夹对等三通

DT-4.1.2-2 Equal Outlet Weld/Clamp Tee (DT-15)



SIZE	$\varnothing D$	L	L1	T
1/2"	12.7	95.26	25.4	1.65
3/4"	19.05	101.6	28.58	1.65
1"	25.4	107.96	28.59	1.65
1.5"	38.1	120.66	34.39	1.65
2"	50.8	146.06	41.28	1.65
2.5"	63.5	158.76	47.63	1.65
3"	76.2	171.46	53.98	1.65
4"	101.6	209.56	69.85	2.11
6"	152.4	285.76	117.48	2.77

夹式对等三通

DT-4.1.2-4T Clamp Tee (DT-18)



SIZE	$\varnothing D$	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

夹式四通

DT-4.1.2-4C Clamp Cross (DT-18)




SIZE	$\varnothing D$	L	T
1/2"	12.7	114.3	1.65
3/4"	19.05	120.66	1.65
1"	25.4	133.36	1.65
1.5"	38.1	146.06	1.65
2"	50.8	171.46	1.65
2.5"	63.5	184.16	1.65
3"	76.2	196.86	1.65
4"	101.6	241.3	2.11
6"	152.4	361.96	2.77

BPE 管件

BPE Fittings

变径夹三通

DT-4.1.2-8 Reducing Tee Clamp End (DT-19)

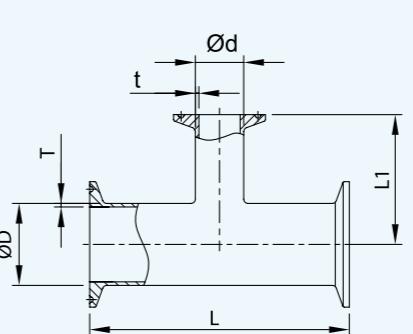

SIZE	$\varnothing D$	$\varnothing d$	L	L1	T	t
3/4" * 1/2"	19.05	12.7	127	63.5	1.65	1.65
1.0" * 1/2"	25.4	12.7	133.36	66.68	1.65	1.65
1.0" * 3/4"	25.4	19.05	133.36	66.68	1.65	1.65
1.5" * 1/2"	38.1	12.7	146.06	73.03	1.65	1.65
1.5" * 3/4"	38.1	19.05	146.06	73.03	1.65	1.65
1.5" * 1.0"	38.1	25.4	146.06	73.03	1.65	1.65
2.0" * 1/2"	50.8	12.7	171.46	79.38	1.65	1.65
2.0" * 3/4"	50.8	19.05	171.46	79.38	1.65	1.65
2.0" * 1.0"	50.8	25.4	171.46	79.38	1.65	1.65
2.0" * 1.5"	50.8	38.1	171.46	79.38	1.65	1.65
2.5" * 1/2"	63.5	12.7	184.16	85.73	1.65	1.65
2.5" * 3/4"	63.5	19.05	184.16	85.73	1.65	1.65
2.5" * 1.0"	63.5	25.4	184.16	85.73	1.65	1.65
2.5" * 1.5"	63.5	38.1	184.16	85.73	1.65	1.65
2.5" * 2.0"	63.5	50.8	184.16	85.73	1.65	1.65


SIZE	$\varnothing D$	$\varnothing d$	L	L1	T	t
3.0" * 1/2"	76.2	12.7	196.86	92.08	1.65	1.65
3.0" * 3/4"	76.2	19.05	196.86	92.08	1.65	1.65
3.0" * 1.0"	76.2	25.4	196.86	92.08	1.65	1.65
3.0" * 1.5"	76.2	38.1	196.86	92.08	1.65	1.65
3.0" * 2.0"	76.2	50.8	196.86	92.08	1.65	1.65
3.0" * 2.5"	76.2	63.5	196.86	92.08	1.65	1.65
4.0" * 1/2"	101.6	12.7	241.3	104.78	2.11	1.65
4.0" * 3/4"	101.6	19.05	241.3	104.78	2.11	1.65
4.0" * 1.0"	101.6	25.4	241.3	104.78	2.11	1.65
4.0" * 1.5"	101.6	38.1	241.3	104.78	2.11	1.65
4.0" * 2.0"	101.6	50.8	241.3	111.13	2.11	1.65
4.0" * 2.5"	101.6	63.5	241.3	111.13	2.11	1.65
4.0" * 3.0"	101.6	76.2	241.3	111.13	2.11	1.65
6.0" * 3.0"	152.4	76.2	361.96	136.53	2.77	1.65
6.0" * 4.0"	152.4	101.6	361.96	146.05	2.77	2.11

BPE 管件

BPE Fittings

短出口夹式变径三通

DT-4.1.2-9 Reducing Tee Clamp End (DT-20)

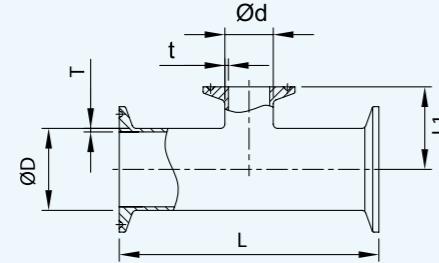

SIZE	ØD	Ød	L	L1	T	t
3/4" * 1/2"	19.05	12.7	127	25.4	1.65	1.65
1.0" * 1/2"	25.4	12.7	133.36	28.58	1.65	1.65
1.0" * 3/4"	25.4	19.05	133.36	28.58	1.65	1.65
1.5" * 1/2"	38.1	12.7	146.06	34.93	1.65	1.65
1.5" * 3/4"	38.1	19.05	146.06	34.93	1.65	1.65
1.5" * 1.0"	38.1	25.4	146.06	34.93	1.65	1.65
2.0" * 1/2"	50.8	12.7	171.46	41.28	1.65	1.65
2.0" * 3/4"	50.8	19.05	171.46	41.28	1.65	1.65
2.0" * 1.0"	50.8	25.4	171.46	41.28	1.65	1.65
2.0" * 1.5"	50.8	38.1	171.46	41.28	1.65	1.65
2.5" * 1/2"	63.5	12.7	184.16	47.63	1.65	1.65
2.5" * 3/4"	63.5	19.05	184.16	47.63	1.65	1.65
2.5" * 1.0"	63.5	25.4	184.16	47.63	1.65	1.65
2.5" * 1.5"	63.5	38.1	184.16	47.63	1.65	1.65
2.5" * 2.0"	63.5	50.8	184.16	47.63	1.65	1.65
3.0" * 1/2"	76.2	12.7	196.86	53.98	1.65	1.65
3.0" * 3/4"	76.2	19.05	196.86	53.98	1.65	1.65
3.0" * 1.0"	76.2	25.4	196.86	53.98	1.65	1.65



SIZE	ØD	Ød	L	L1	T	t
3.0" * 1.5"	76.2	38.1	196.86	53.98	1.65	1.65
3.0" * 2.0"	76.2	50.8	196.86	53.98	1.65	1.65
3.0" * 2.5"	76.2	63.5	196.86	53.98	1.65	1.65
4.0" * 1/2"	101.6	12.7	241.3	66.68	2.11	1.65
4.0" * 3/4"	101.6	19.05	241.3	66.68	2.11	1.65
4.0" * 1.0"	101.6	25.4	241.3	66.68	2.11	1.65
4.0" * 1.5"	101.6	38.1	241.3	66.68	2.11	1.65
4.0" * 2.0"	101.6	50.8	241.3	66.68	2.11	1.65
4.0" * 2.5"	101.6	63.5	241.3	66.68	2.11	1.65
4.0" * 3.0"	101.6	76.2	241.3	66.68	2.11	1.65
6.0" * 1/2"	152.4	12.7	361.96	92.08	2.77	1.65
6.0" * 3/4"	152.4	19.05	361.96	92.08	2.77	1.65
6.0" * 1.0"	152.4	25.4	361.96	92.08	2.77	1.65
6.0" * 1.5"	152.4	38.1	361.96	92.08	2.77	1.65
6.0" * 2.0"	152.4	50.8	361.96	92.08	2.77	1.65
6.0" * 2.5"	152.4	63.5	361.96	92.08	2.77	1.65
6.0" * 3.0"	152.4	76.2	361.96	92.08	2.77	1.65
6.0" * 4.0"	152.4	101.6	361.96	95.25	2.77	2.11

BPE 管件

BPE Fittings

夹式同心大小头

DT-4.1.3-3 Clamp Concentric Reducer (DT-21)

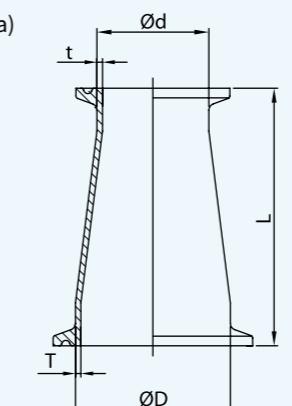

SIZE	ØD	Ød	L	T	t	L2
3/4" * 1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1" * 1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1" * 3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5" * 1/2"	38.1	12.7	88.9	1.65	1.65	101.6
1.5" * 3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5" * 1.0"	38.1	25.4	76.2	1.65	1.65	88.9
2" * 1/2"	50.8	12.7	139.7	1.65	1.65	111.13
2" * 3/4"	50.8	19.05	127	1.65	1.65	111.13
2" * 1"	50.8	25.4	127	1.65	1.65	111.13
2" * 1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5" * 1/2"	63.5	12.7	190.5	1.65	1.65	—
2.5" * 3/4"	63.5	19.05	177.8	1.65	1.65	—
2.5" * 1"	63.5	25.4	177.8	1.65	1.65	111.13
2.5" * 1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5" * 2"	63.5	50.8	76.2	1.65	1.65	88.9
3" * 1"	76.2	25.4	288.6	1.65	1.65	133.35
3" * 1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3" * 2"	76.2	50.8	127	1.65	1.65	111.13
3" * 2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4" * 1"	101.6	25.4	333.4	2.11	1.65	—
4" * 1.5"	101.6	38.1	282.6	2.11	1.65	—
4" * 2"	101.6	50.8	231.8	2.11	1.65	158.75
4" * 2.5"	101.6	63.5	181	2.11	1.65	136.53
4" * 3"	101.6	76.2	130.2	2.11	2.1	127
6" * 3"	152.4	76.2	—	2.77	1.65	215.9
6" * 4"	152.4	101.6	193.7	2.77	2.11	177.8



BPE 管件与配件

BPE Pharmaceutical Fittings

BPE 管件
BPE Fittings

夹式偏心大小头

DT-4.1.3-3 Clamp Eccentric Reducer (DT-21)

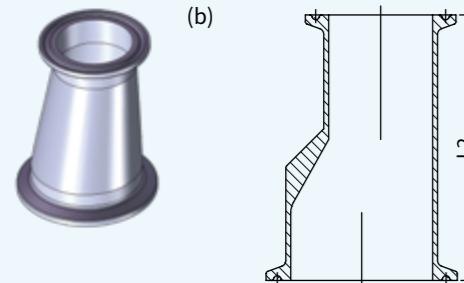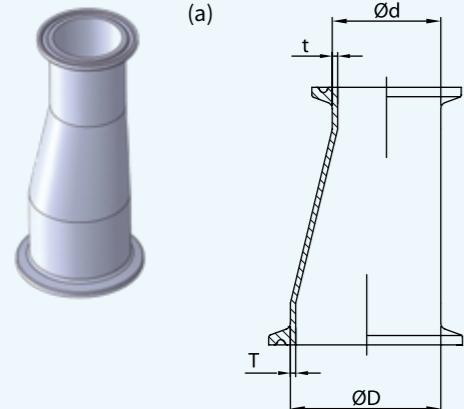

SIZE	ØD	Ød	L	T	t	L2
3/4"*1/2"	19.05	12.7	50.8	1.65	1.65	79.38
1"*1/2"	25.4	12.7	63.5	1.65	1.65	88.9
1"*3/4"	25.4	19.05	50.8	1.65	1.65	79.38
1.5"*1/2"	38.1	12.7	88.9	1.65	1.65	101.6
1.5"*3/4"	38.1	19.05	76.2	1.65	1.65	101.6
1.5"*1"	38.1	25.4	76.2	1.65	1.65	88.9
2"*1/2"	50.8	12.7	139.7	1.65	1.65	111.13
2"*3/4"	50.8	19.05	127	1.65	1.65	111.13
2"*1"	50.8	25.4	127	1.65	1.65	111.13
2"*1.5"	50.8	38.1	76.2	1.65	1.65	88.9
2.5"*1/2"	63.5	12.7	190.5	1.65	1.65	—
2.5"*3/4"	63.5	19.05	177.8	1.65	1.65	—
2.5"*1"	63.5	25.4	177.8	1.65	1.65	111.13
2.5"*1.5"	63.5	38.1	127	1.65	1.65	111.13
2.5"*2"	63.5	50.8	76.2	1.65	1.65	88.9
3"*1"	76.2	25.4	288.6	1.65	1.65	133.35
3"*1.5"	76.2	38.1	117.8	1.65	1.65	133.35
3"*2"	76.2	50.8	127	1.65	1.65	111.13
3"*2.5"	76.2	63.5	76.2	1.65	1.65	92.08
4"*1"	101.6	25.4	333.4	2.11	1.65	—
4"*1.5"	101.6	38.1	282.6	2.11	1.65	—
4"*2"	101.6	50.8	231.8	2.11	1.65	158.75
4"*2.5"	101.6	63.5	181	2.11	1.65	136.53
4"*3"	101.6	76.2	130.2	2.11	2.11	127
6"*3"	152.4	76.2	—	2.77	1.65	215.9
6"*4"	152.4	101.6	193.7	2.77	2.11	177.8

BPE 管件与配件

BPE Pharmaceutical Fittings

BPE 管件
BPE Fittings

卡箍式平接头

DT-4.1.4-1 Weld Ferrule (DT-22)




(Type A)

1/2"~1"



(Type B)

1"~6"

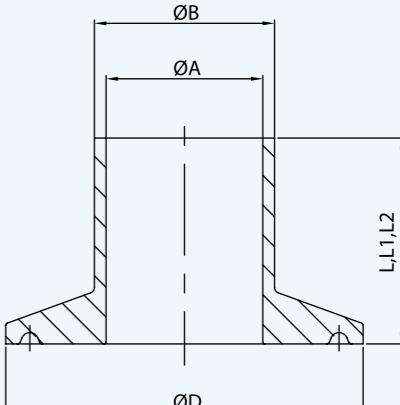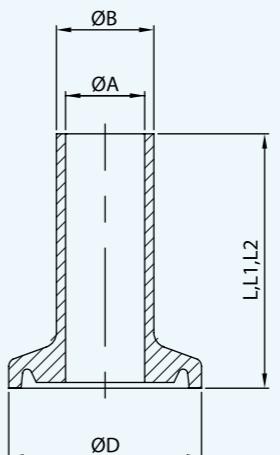


TYPE	SIZE	ØA	ØB	ØD	L	L1	L2
A	1/4"	4.57	6.35	25	12.7	28.58	44.45
	3/8"	7.75	9.53	25	12.7	28.58	44.45
	1/2"	9.4	12.7	25	12.7	28.58	44.45
	3/4"	15.75	19.05	25	12.7	28.58	44.45
	1.0"	22.1	25.4	34	12.7	28.58	44.45
B	1.0"	22.1	25.4	50.39	12.7	28.58	44.45
	1.5"	34.8	38.1	50.39	12.7	28.58	44.45
	2.0"	47.5	50.8	63.91	12.7	28.58	57.15
	2.5"	60.2	63.5	77.39	12.7	28.58	57.15
	3.0"	72.9	76.2	90.91	12.7	28.58	57.15
	4.0"	97.38	101.6	118.92	15.88	28.58	57.15
	6.0"	146.86	152.4	166.88	19.05	38.1	76.2

BPE 管件

BPE Fittings

单卡 U 型三通 / 短直部 U 型三通



U-Tee ends Weld/Ferrule/Weld/U-Tee Weld/Ferrule/Weld(Short Straight Part)

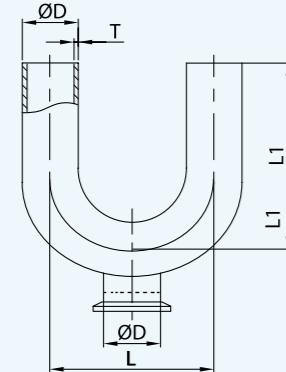

SIZE	ØD	L	L1	T
1"	25.4	76.2	76.2	1.65
1.5"	38.1	114.3	114.3	1.65
2"	50.8	152.4	127	1.65
2.5"	63.5	190.5	146.05	1.65
3"	76.2	228.6	165.1	1.65
4"	101.6	304.8	215.9	2.11
6"	152.4	457.2	292.1	2.77

短出口单卡三通


DT-4.1.2-3 Short Outlet Run Weld/Clamp Tee (DT-25)



SIZE	ØD	L	L1	T
1/2"	12.7	47.63	22.23	1.65
3/4"	19.05	50.8	25.4	1.65
1"	25.4	53.98	28.58	1.65
1.5"	38.1	60.33	34.93	1.65
2"	50.8	73.03	41.28	1.65
2.5"	63.5	79.38	47.63	1.65
3"	76.2	85.73	53.98	1.65
4"	101.6	104.78	69.85	2.11
6"	152.4	142.88	117.48	2.77

夹式短出口等径三通

DT-4.1.2-5 Short Outlet Tee Clamp End (DT-27)

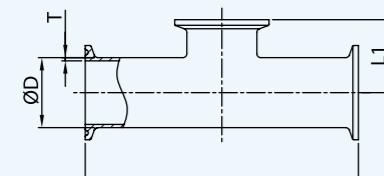


SIZE	ØD	L	L1	T
1/2"	12.7	114.3	25.4	1.65
3/4"	19.05	120.66	28.58	1.65
1"	25.4	133.36	28.58	1.65
1.5"	38.1	146.06	34.93	1.65
2"	50.8	171.46	41.28	1.65
2.5"	63.5	184.16	47.63	1.65
3"	76.2	196.86	53.98	1.65
4"	101.6	241.3	69.85	2.11
6"	152.4	361.96	117.48	2.77

BPE 管件

BPE Fittings

单夹同心大小头


DT-4.1.3-2AC Concentric Reducer (DT-26)

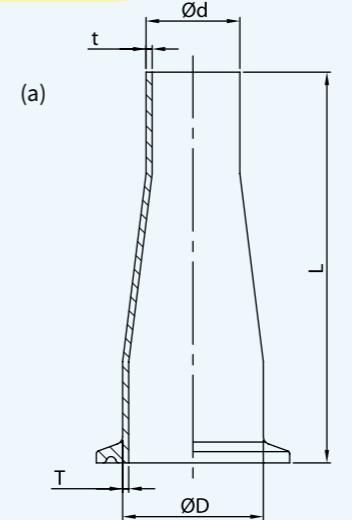

SIZE	ØD	Ød	T	t	L	L1
3/4"*1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"*1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"*3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"*1/2"	38.1	12.7	1.65	1.65	—	88.9
1.5"*3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"*1"	38.1	25.4	1.65	1.65	101.6	76.2
2"*1/2"	50.8	12.7	1.65	1.65	—	98.43
2"*3/4"	50.8	19.05	1.65	1.65	—	98.43
2"*1"	50.8	25.4	1.65	1.65	152.4	98.43
2"*1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"*1"	63.5	25.4	1.65	1.65	—	98.43
2.5"*1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"*2"	63.5	50.8	1.65	1.65	107.9	76.2
3"*1"	76.2	25.4	1.65	1.65	—	120.65
3"*1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"*2"	76.2	50.8	1.65	1.65	158.8	98.43
3"*2.5"	76.2	63.5	1.65	1.65	108	79.38
4"*2"	101.6	50.8	2.11	1.65	263.5	146.05
4"*2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"*3"	101.6	76.2	2.11	1.65	161.9	114.3
6"*3"	152.4	76.2	2.77	2.77	228.6	203.2
6"*4"	152.4	101.6	2.77	2.77	228.6	161.93

单夹偏心大小头

DT-4.1.3-2AE Eccentric Reducer (DT-26)

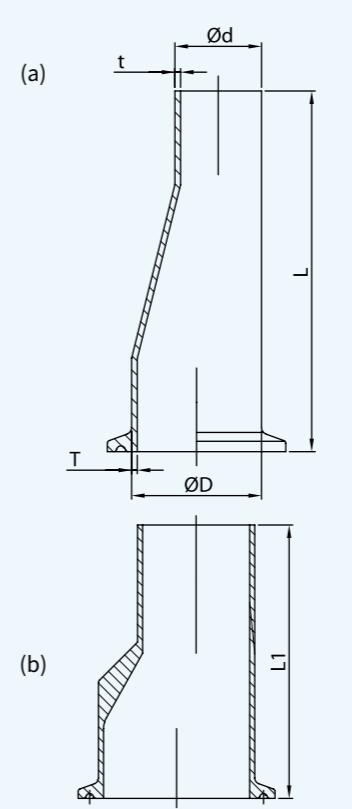

SIZE	ØD	Ød	T	t	L	L1
3/4"*1/2"	19.05	12.7	1.65	1.65	76.2	66.68
1"*1/2"	25.4	12.7	1.65	1.65	88.9	76.2
1"*3/4"	25.4	19.05	1.65	1.65	76.2	66.68
1.5"*1/2"	38.1	12.7	1.65	1.65	—	88.9
1.5"*3/4"	38.1	19.05	1.65	1.65	101.6	88.9
1.5"*1"	38.1	25.4	1.65	1.65	101.6	76.2
2"*1/2"	50.8	12.7	1.65	1.65	—	98.43
2"*3/4"	50.8	19.05	1.65	1.65	—	98.43
2"*1"	50.8	25.4	1.65	1.65	152.4	98.43
2"*1.5"	50.8	38.1	1.65	1.65	101.6	76.2
2.5"*1"	63.5	25.4	1.65	1.65	—	98.43
2.5"*1.5"	63.5	38.1	1.65	1.65	152.4	98.43
2.5"*2"	63.5	50.8	1.65	1.65	107.9	76.2
3"*1"	76.2	25.4	1.65	1.65	—	120.65
3"*1.5"	76.2	38.1	1.65	1.65	203.2	120.65
3"*2"	76.2	50.8	1.65	1.65	158.8	98.43
3"*2.5"	76.2	63.5	1.65	1.65	108	79.38
4"*2"	101.6	50.8	2.11	1.65	263.5	146.05
4"*2.5"	101.6	63.5	2.11	1.65	212.7	123.83
4"*3"	101.6	76.2	2.11	1.65	161.9	114.3
6"*3"	152.4	76.2	2.77	1.65	222.3	203.2
6"*4"	152.4	101.6	2.77	2.11	228.6	161.93



BPE 管件

BPE Fittings


短出口焊式 (DT28) / 仪表三通 (DT29)

Instrument Tee Weld/Clamp End

DT-4.1.2-10(DT-28)

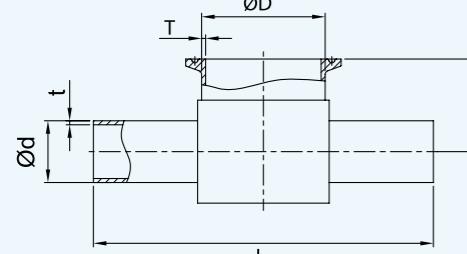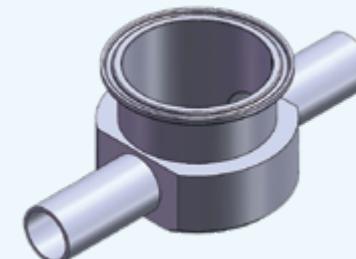

DT-4.1.2-11(DT-29)

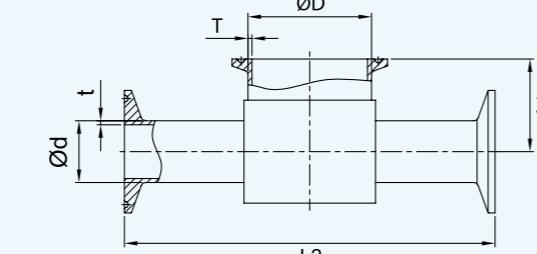

管托架

重-duty Clamp-Rings

Ferrule Adapters

Tubing Hangers



DIN 11851 沃仕
DIN 11851 UnionsSMS 沃仕
SMS Unions3A 管件
3A Tubular ItemsSMS 管件
SMS (ISO 2037) Tubular ItemsSMS 大小头
SMS (ISO 2037) Tubular ItemsBPE 管件
BPE Fittings

BPE 管件

BPE Fittings

管帽


DT-4.1.5-1 Automatic Tube Weld (DT-30)



SIZE	ØD	L
1/2"	12.7	38.1
3/4"	19.05	38.1
1.0"	25.4	38.1
1.5"	38.1	38.1
2.0"	50.8	38.1
2.5"	63.5	38.1
3.0"	76.2	44.45
4.0"	101.6	50.8
6.0"	152.4	63.5

盲板

DT-4.1.5-2 Solid End Cap Hygienic Clamp Joine(DT-31)

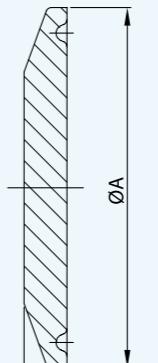

SIZE	ØD	L
1/4"	25	4.75
3/8"	25	4.75
1/2"	25	4.75
3/4"	25	4.75
1.0"	34/50.39	6.35
1.5"	50.39	6.35
2.0"	63.91	6.35
2.5"	77.39	6.35
3.0"	90.91	6.35
4.0"	118.92	7.92
6.0"	166.88	11.1



QA:0410091424



BPE-122

VALVES

阀门类

卫生级阀门

Sanitary Valves



日嘉卫生金属(嘉兴)有限公司
RI JIA SANITARY METAL(JIAXING)CO.,LTD.

手动换向阀

Manual Divert Valves



■ 物料：

流通面积：AISI 316L

其他配件：AISI 304

阀杆：AISI 316L，表面镀铬

小面積垫片：EPDM/NBR/FKM/PTFE

其它油封：NBR和EPDM

OD表面：镜面/缎面/喷砂

■ 技术数据：

最大生产压力：1000kpa (10bar)

温度范围：-10°C至+104°C (EPDM)

■ Materials :

Flow area: AISI 316L

Other steel parts: AISI 304

Plug stem: AISI 316L with Chromium Plated Surface

Gasket for Flow Area: EPDM/NBR/FKM/PTFE

Other seals: NBR and EPDM

OD Surface: Mirror/Satin/Sand Blaste



■ Technical date :

Max. production pressure : 1000kpa(10bar).


Temperature range : -10°C to +104°C (EPDM).

手动换向阀

Manual Divert Valves

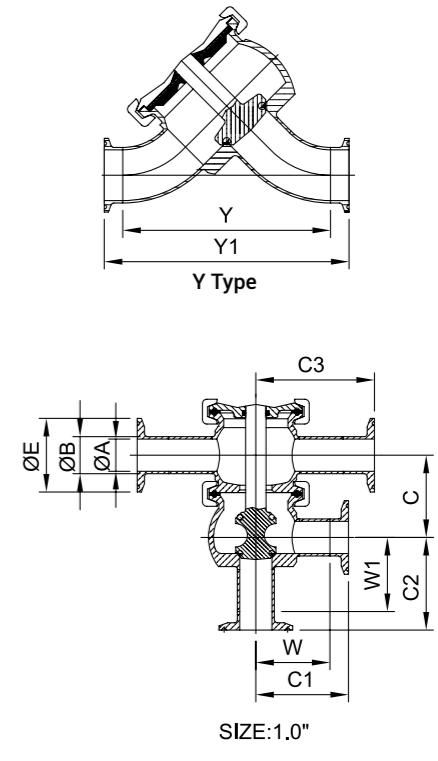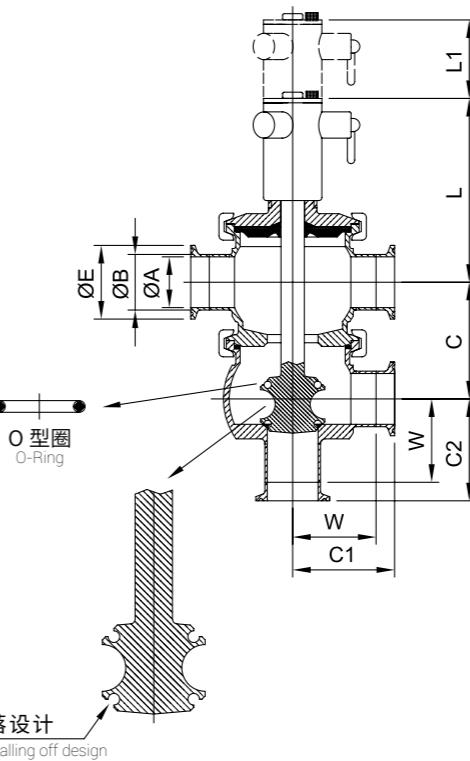

Type:L,T,Y and L/L, T/L,L/T,T/T

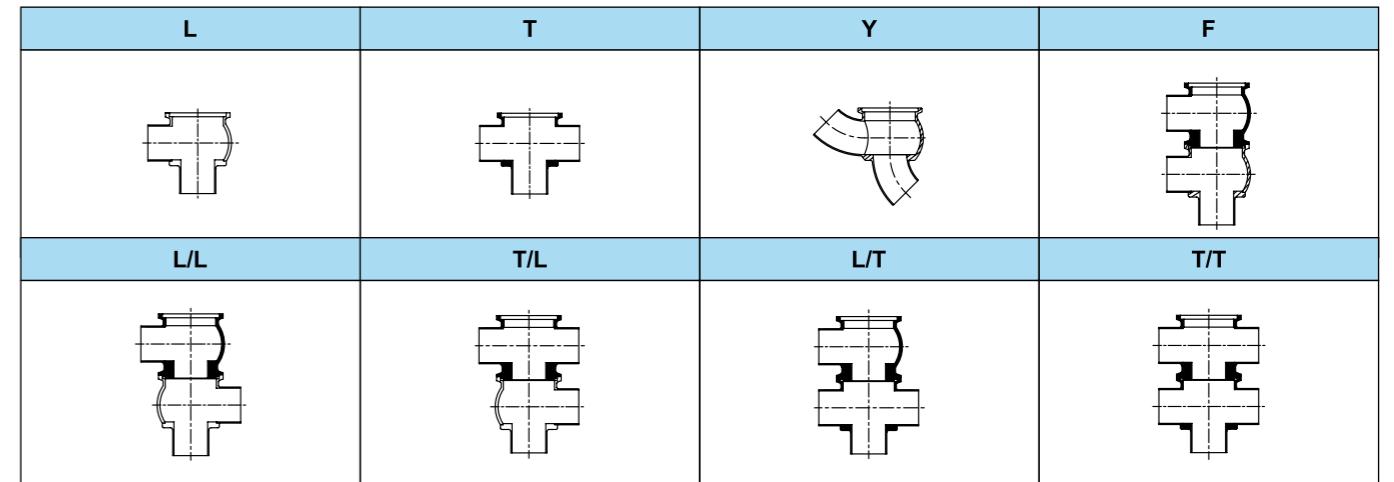


SIZE	1"	1.5"	2"	2.5"	3"	4"
ØA	22.1	34.8	47.5	60.2	72.9	97.4
ØB	25.4	38.1	50.8	63.5	76.2	101.6
C	56.7	80	92.4	120	128	150.8
C1	63.5	69.9	88.9	88.9	95.3	114.3
C2	63.5	69.9	88.9	88.9	95.3	114.3
C3	81.4	—	—	—	—	—
E	50.5	50.5	64	77.5	91	119
L	101	126	135	167	170	645.7
L1	17	25	25	32	36	38
W	50.8	57.2	76.2	76.2	82.6	98.5
W1	50.8	57.2	76.2	76.2	82.6	98.5
Y	96.1	142.3	168.6	211.6	244.7	303.1
Y1	121.5	167.7	194	237	270.1	334.7
(W/W1)+SMS male	19	23	23	27	27	—
(W/W1)+IDF male	21.5	21.5	21.5	21.5	21.5	—
(W/W1)+RJT male	27	27	27	27	27	—

手动换向阀

Manual Divert Valves

■ 配置和流向 / Configuration and Flow Direction

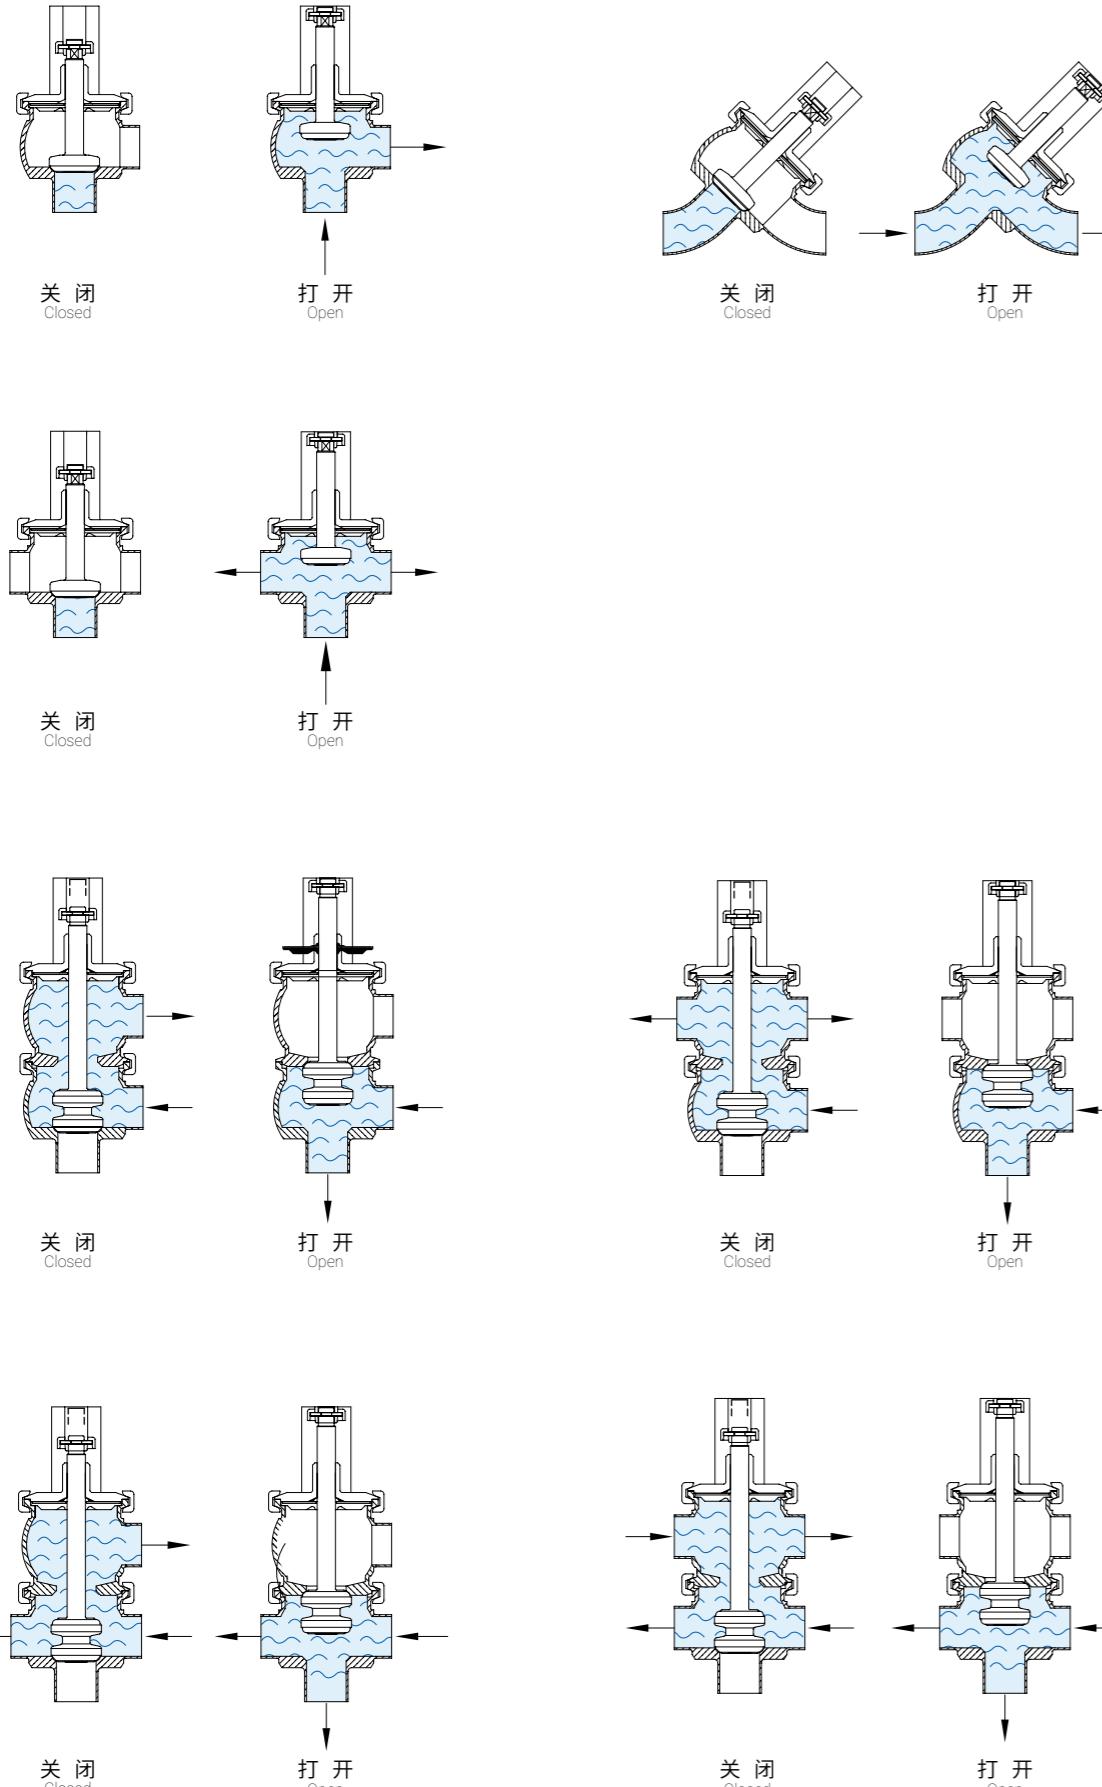

手动控制桶底阀

Manual Control Tank Valves



■ 物料:

流通面积: AISI 316L
其他配件: AISI 304
阀杆: AISI 316L, 表面镀铬
小面积垫片: EPDM/NBR/FKM/PTFE
其它油封: NBR和EPDM
OD表面: 镜面/缎面/喷砂

■ Materials:


Flow area: AISI 316L
Other steel parts: AISI 304
Plug stem: AISI 316L with Chromium Plated Surface
Gasket for Flow Area: EPDM/NBR/FKM/PTFE
Other seals: NBR and EPDM
OD Surface: Mirror/Satin/Sand Blaste

■ 技术数据:


最大生产压力: 1000kpa (10bar)
温度范围: -10°C至+104°C (EPDM)

■ Technical date:

Max. production pressure: 1000kpa(10bar)
Temperature range: -10°C to +104°C (EPDM)

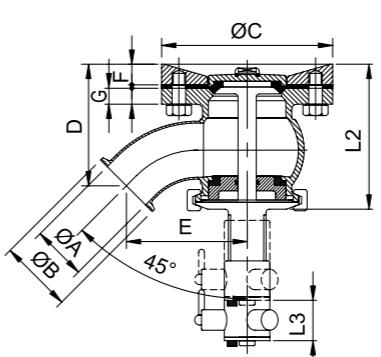

手动: 打开
Manual: Up to open

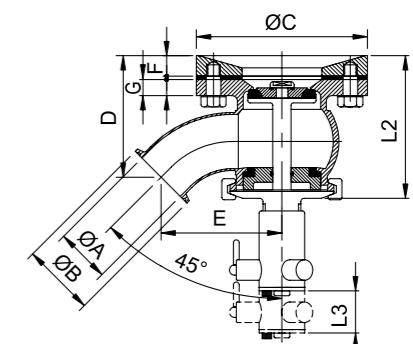


关闭
Up to close

SIZE	1.0"	1.5"	2.0"	2.5"	3.0"
ØA	22.1	34.8	47.5	60.2	72.9
ØB	50.5	50.5	64	77.5	91
ØC	110	140	150	180	200
D	56.8	95.1	106.5	124.7	137.5
E	65.8	93	106	125.5	149.5
F	14	20	20	20	20
G	10	14	14	14	14
L	190	354	360	446	450
L1	22	31	31	39	39
L2	94	122	127	158	164
L3	30	35	35	45	45

不锈钢侧拉把手，4段

Multi Connection With St.St Pull Handle, 4 Position

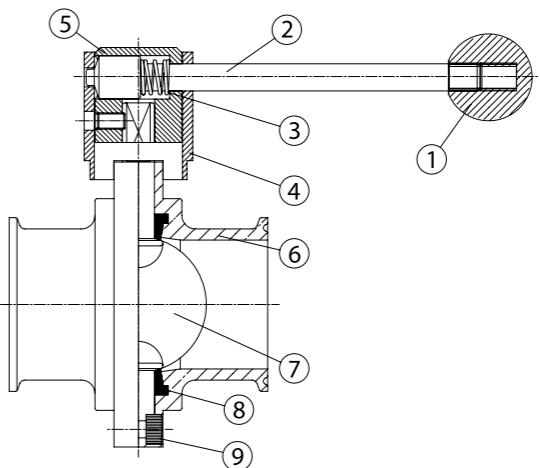

- | | |
|---------|--------------------|
| ① 侧拉手把 | ① Knob |
| ② 不锈钢杆 | ② Steel-Bar |
| ③ 不锈钢弹簧 | ③ Spring St.st |
| ④ 固定块 | ④ Fixed Piece |
| ⑤ 支架 | ⑤ Holder |
| ⑥ 本体 | ⑥ Body |
| ⑦ 螺栓 | ⑦ Disc |
| ⑧ 垫圈 | ⑧ EPDM Rubber Seat |
| ⑨ 碟片 | ⑨ Screw Bolt |

开关压力
Torque for Full Open/Close

1.0"	< 9.8 N.m
1.5"	< 9.8 N.m
2.0"	13 N.m
2.5"	15 N.m
3.0"	20 N.m
4.0"	30 N.m
6.0"	70 N.m

※1kgf-m=9.8 N.m=86.8 lbf-in=7.23 lbf-ft

蝶阀 -C & C型

主体：采用精密 CNC 铣削加工而成的 SUS304, 316L 材料。阀体可变，扭矩低。标准有 BS, SMS, DIN, 3A 焊式和螺纹连接方式与夹式。

碟片：由机械加工，高抛光制成。Ra 小于 0.6 μm。9.5x9.5mm 和 8x12mm, 12x12mm 的中心轴，适用于美国和欧洲。可要求电抛光和 PTFE 涂层。

手柄：有不同的尼龙加固和不锈钢手柄抓手，有拉动和按动两种类型。有2至12个位置，专为您的宽度设计不同的选择。

Width Range of Butterfly Valve-C & C Type


Body: SUS304, 316L material made out from precision CNC milling machined. Body can be changeable, and low torque. BS, SMS, DIN, 3A Weld end and Male/Male end and Clamp end.

Disk: Made out from full machined, high polished. Ra less than 0.6 μm. 9.5x9.5mm and 8x12mm, 12x12mm head for USA and europe required Electropolished and PTFE coating can be required.

Handle: Different nylon re-forced and stainless steel handle gripper, pull, Press type. From 2 Position- 12 Position, designed for your width range choice.

12段下拉把手 -G12 (尼龙和不锈钢)

Gripper Handle 12 Position-G12 (Nylon & Stainless)

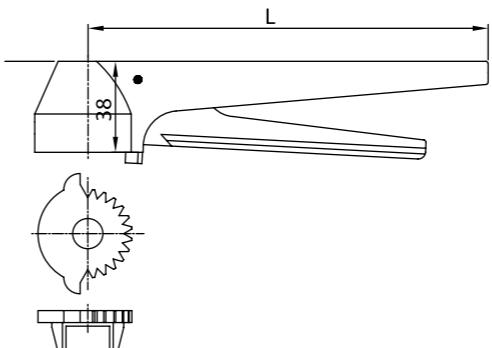


Type	L
ST.ST	159
plastic	167

适合 9.5x9.5 和 Φ12x8 或 12x12
Can fit 9.5x9.5 and Φ12x8 or 12x12

4段式侧拉把手 -P4

Pull Handle 4 Position-P4

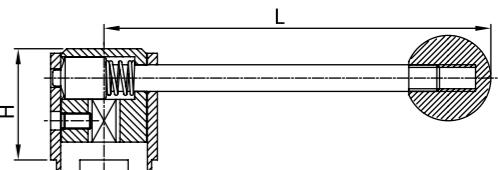

SIZE	H	L
1.0"~3.0"	41.7	145
4.0"	41.7	175
6.0"	52.5	212.5

适合 9.5x9.5 和 Φ12x8 或 12x12
Can fit 9.5x9.5 and Φ12x8 or 12x12

卫生级阀门


Sanitary Valves

蝶阀

Butterfly Valves

夹式蝶阀

Full Forged Butterfly Valve

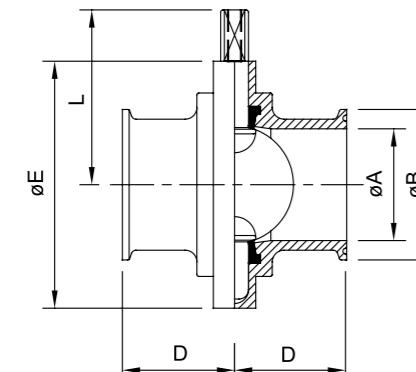

SIZE	ØA	ØB	D	ØE	L
1/2"	9.4	25.2	34	79	61
3/4"	15.75	25.2	34	79	61
1.0"	22.1	50.5	33	79	61
1.5"	34.8	50.5	33	85	64.3
2.0"	47.5	64	35	105	74.3
2.5"	60.2	77.5	35	112	77.6
3.0"	72.2	91	38	125	84.8
4.0"	97.6	119	38	157	101.75
6.0"	146.86	166.87	70	216.5	132.5

卫生级阀门

Sanitary Valves

桶底阀


蝶阀

上回流

球阀

焊式蝶阀

Full Weld Butterfly Valve

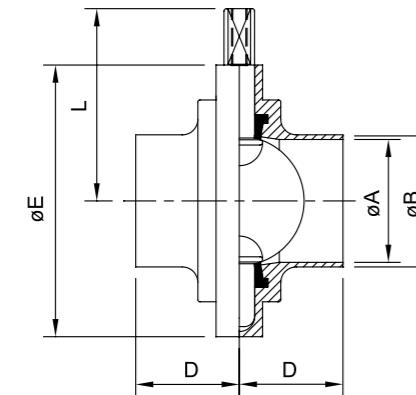

SIZE	ØA	ØB	SIZE	ØA	ØB	D	ØE	L
1/2"	9.4	12.7	DN25	22.5	25	34	79	61
3/4"	15.75	19.05	DN38	35.4	38	38	79	61
1.0"	22.1	25.4	DN51	48.0	51	40	85	64.3
1.5"	34.8	38.1	DN63	60.2	63.5	40	105	74.3
2.0"	47.5	50.8	DN76	72.1	76.1	41	112	77.6
2.5"	60.2	63.5	DN104	100	104	44	125	84.8
3.0"	72.2	76.2	—	—	—	70	157	101.7
4.0"	97.6	101.6	—	—	—	216.5	138.9	
6.0"	146.8	152.4	—	—	—			

取样阀

隔膜阀

其他阀

特殊阀

卫生级阀门

Sanitary Valves

止回阀

Non Return Valves (Check Valves)



物料

钢材: 不锈钢SS316(L)

密封: EPDM橡胶或硅酮/氟橡胶(FKM)

表面处理: OD≤0.8, ID≤0.8或0.4μm

连接

该阀可提供符合3A、SMS、BS、DIN的管道焊接端

技术数据

打开安装在垂直管中的阀门需要不同的压力, 如图3

所示产品压力: 1000kpa(10bar)

材料等级

垫片本体: EPDM/硅树脂/FKM/NBR/PTFE

流动面积-EPDM/硅树脂/FKM/NBR

Materials

Steel parts Stainless steel SS316(L)

Seal rings: EPDM Rubber or Silicone/Viton(FKM)

Finish: OD≤0.8, ID≤0.8 or 0.4μm

Connections

The valve is available with welding ends for tubing according to 3A, SMS, BS, DIN

Technical data

Required different pressure for opening the valve fitted in a vertical pipe, as shown in fig. 3, the working pressure Max. product pressure: 1000kpa(10bar)

Material grades

Gasket-body: EPDM/Silicone/FKM/NBR/PTFE

Flow AREA-EPDM/Silicone/FKM/NBR

止回阀

Non-Return Valves

桶底阀

蝶阀

止回阀

球阀


取样阀

隔膜阀

其他阀

特殊阀

- | | | | |
|----------|--------------|---------|----------------------|
| ① 短本体 | ① Short Body | ⑤ 挡板垫圈 | ⑤ Seal-Ring |
| ② 长本体 | ② Long Body | ⑥ 不锈钢弹簧 | ⑥ ST.ST Spring |
| ③ 卡箍 | ③ Clamp | ⑦ 导流支架 | ⑦ Flow Support Plate |
| ④ 13PG垫圈 | ④ 13PG | ⑧ 挡板 | ⑧ Disc |


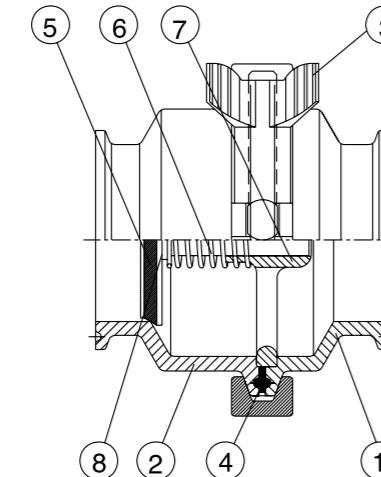


止回阀

Non-Return Valves

焊式止回阀

Check Valve Middle Clamp Type / Weld End

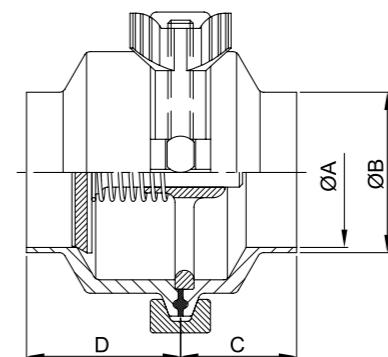


SIZE	ØA	ØB	C	D
1/2"	9.4	12.7	24	34
3/4"	15.75	19.05	24	34
1.0"	22.1	25.4	34	48
1.5"	34.8	38.1	36	48
2.0"	47.5	50.8	36	48
2.5"	60.2	63.5	36	48
3.0"	72.9	76.2	36	48
4.0"	97.6	101.6	47	54

弹簧止回阀流量 (图 3)

Sprung Check Valve flow rate (fig 3)

压强 / Pressure Drop (PSI)

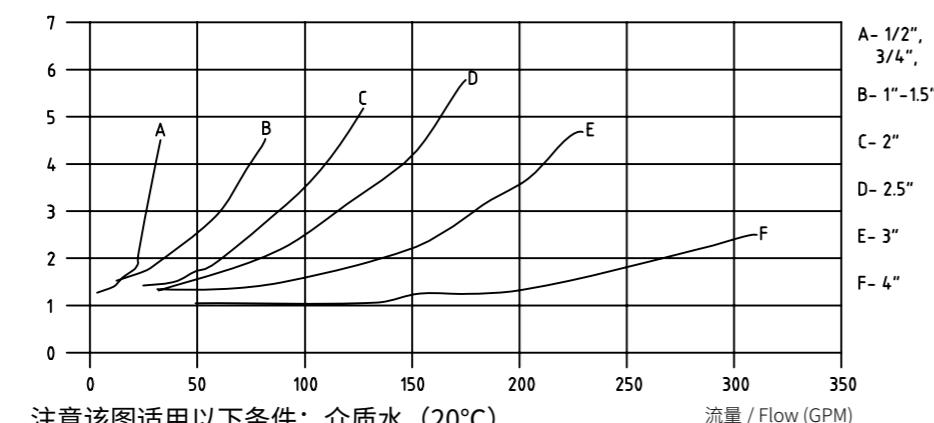



开启压力 (图 1)

Open pressure (fig 1)

(PSI)	1/2"	3/4"	1"	1 1/2"	2"	2 1/2"	3"	4"
0.5	0.5	0.5	3.0	1.6	0.6	1.3	0.8	0.9

夹式止回阀

Check Valve Middle Clamp Type / Clamp End

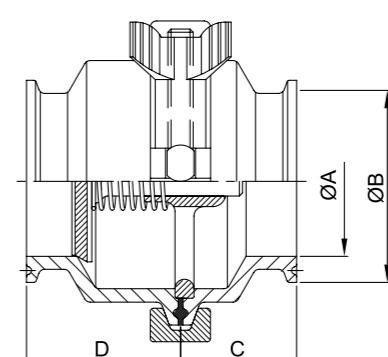



SIZE	ØA	ØB	C	D
1/2"	9.4	25.2	28.5	39.5
3/4"	15.75	25.2	28.5	39.5
1.0"	22.1	50.5	34	48
1.5"	34.8	50.5	36	48
2.0"	47.5	64	36	48
2.5"	60.2	77.5	36	48
3.0"	72.9	91	36	48
4.0"	97.6	119	47	54

卫生级全包球阀 (适用于制药与食品)

Ball Valves For Food And BPE Use With ISO

Mount Plate Weld/Male/Clamp End-fulled Cavity Seat

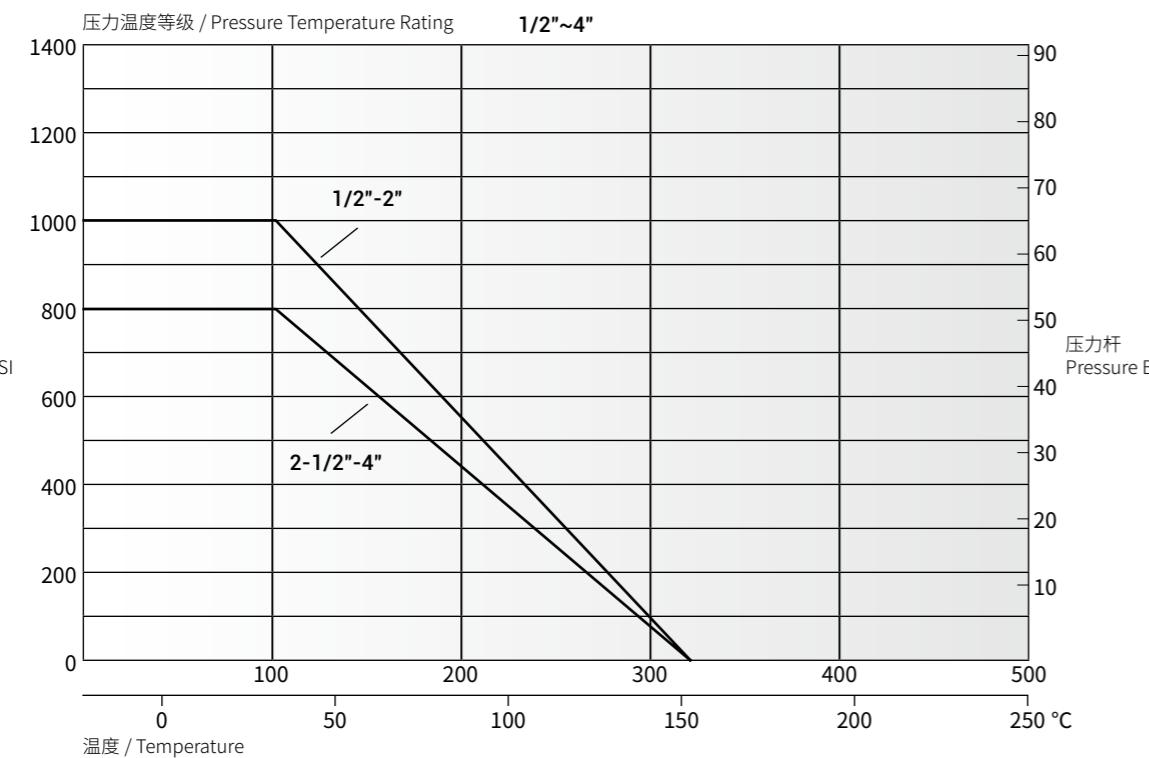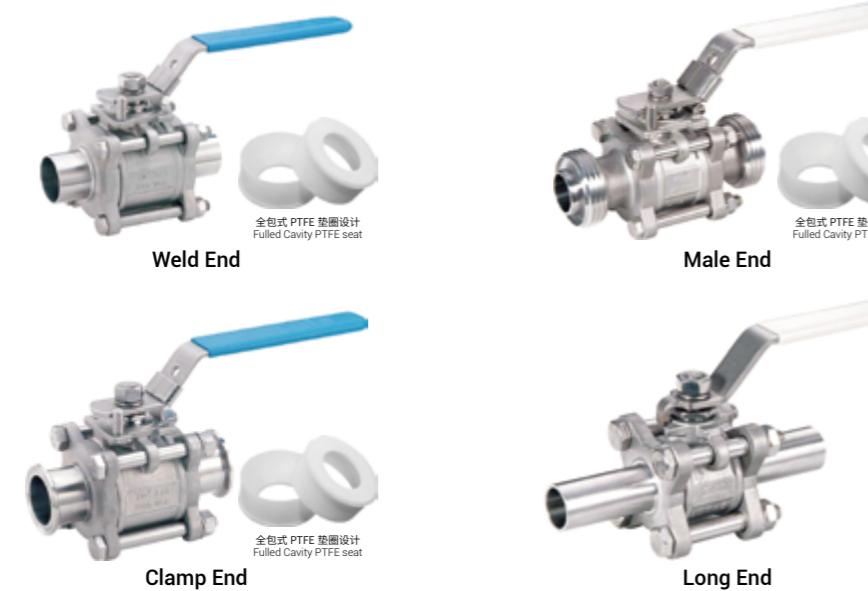

- 手把位子可锁片
- 通过100PSI气压安全测试 (全开或全关)

水压测试阀体W.P 1000PSI管端W.P 200 PSI

连接方式: 焊式夹式

其他 SMS. DIN. RJT. IDF

螺纹方式等可以根据需求订制

- Lock device can be required

100% air tested under water at 100psi, open and closed positions.

Hydrostatic test pressure Body W.P 1000 PSI Tube End W.P 200 PSI

Standard End: Weld & Clamp-end

Other SMS DIN. RJT. IDF


Male/Male can be required

卫生级全包球阀 (适用于制药与食品)

Ball Valves For Food And BPE Use With ISO

Mount Plate Weld/Male/Clamp End-fulled Cavity Seat

■ 球阀结构图 / Ball Valve Structural Drawing

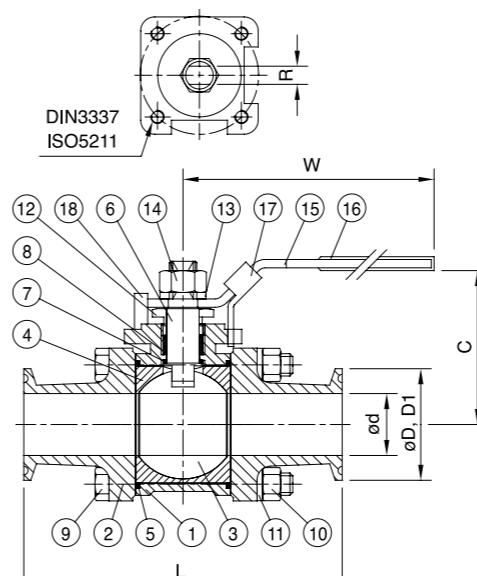

零件清单 Parts List		
Item	零件名称 Parts name	材质 Material
1	本体 Body	ASTM-A743-CF8M
2	侧盖 Cap	ASTM-A743-CF8M
3	球体 Ball	A351-CF8M
4	垫圈座 Seat	PTFE
5	垫圈环 Gasket	PTFE
6	中心轴 Stem	SUS316
7	垫片 Thrust washer	PTFE
8	中心轴垫片环 Stem packing	PTFE
9	螺栓 Bolt	SUS304
10	螺母 Hex nut	SUS304
11	华司垫片 Bolt washer	SUS304
12	紧迫螺母 Gland	SUS304
13	华司垫片 Washer	SUS304
14	螺母 Nut	SUS304
15	手把 Handle	SUS304
16	手把塑胶 Plastic cover	Plastic
17	定位栓 Lock device	SUS304
18	锁片装置 Stop pin	SUS304

夹式与焊式规格

Specifications for clamp & weld end

SIZE	1/2"	3/4"	1"	1.5"	2"	2.5"	3"	4"
	DN15	DN20	DN25	DN40	DN50	DN65	DN80	DN100
ISO-5211	F03	F03	F04	F05	F05	F07	F07	F10
C	58.3	62.9	68	87	95	127	136	159
ød	9.4	15.75	22.1	34.8	47.5	60.2	72.9	97.4
øD	25.2	25.2	50.5	50.5	64	77.5	91	119
øD1	12.7	19.05	25.4	38.1	50.8	63.5	76.2	101.6
L	89	101	114	140	156	197	229	243
R	5	5	6.5	8.5	8.5	12	12	16
W	130	130	166.7	194.3	194.3	252	252	333
L1	135	135	165	165	190	205	265	306


卫生级全包球阀 (适用于食品化工与真空行业)

Sanitary-Ball Valves For Food Chemical, and Vacuum Use.

With ISO Mount Plate Weld/Male End

手动 3 通球阀

Manual Ball Valve, 3-way

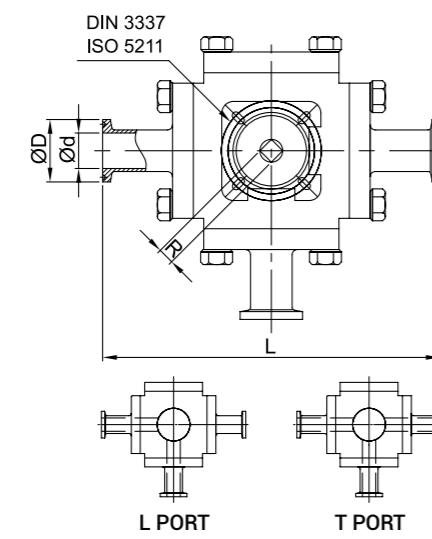


SIZE		SO-5211	Ød	ØD	L	R
1/2"	DN15	F03	9.5	25.4	118	9
3/4"	DN20	F03	15.8	25.4	127	9
1.0"	DN25	F04	22.2	50.4	152.6	11
1.5"	DN40	F05	35	50.4	175	14
2.0"	DN50	F05	47.6	63.9	190	14
2.5"	DN65	F07	60.2	77.5	228	17
3.0"	DN80	F10	73	90.9	260.6	22
4.0"	DN100	F10	97.4	118.9	290	22

取样阀

Sample Cock Valves

测试阀


Test Valve

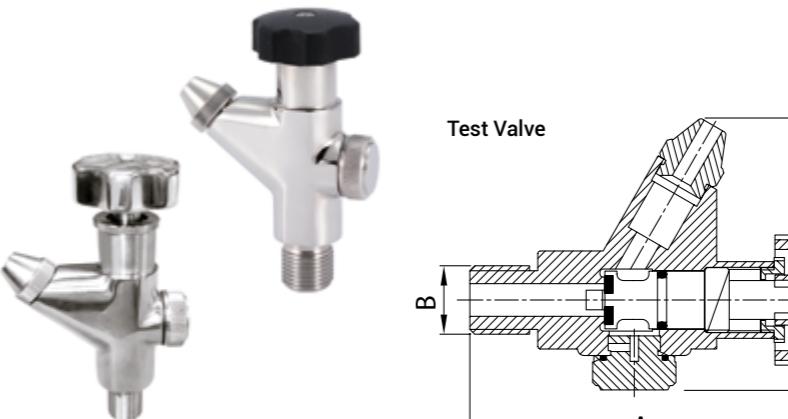

Type	A	B
16AMP	81.8	ø50.5
Ferrule	95.33	ø50.5
Male	109	1/2"-PF
Flange	81.5	60x29

A-Type 取样阀

A-Type Sample Cock Valve

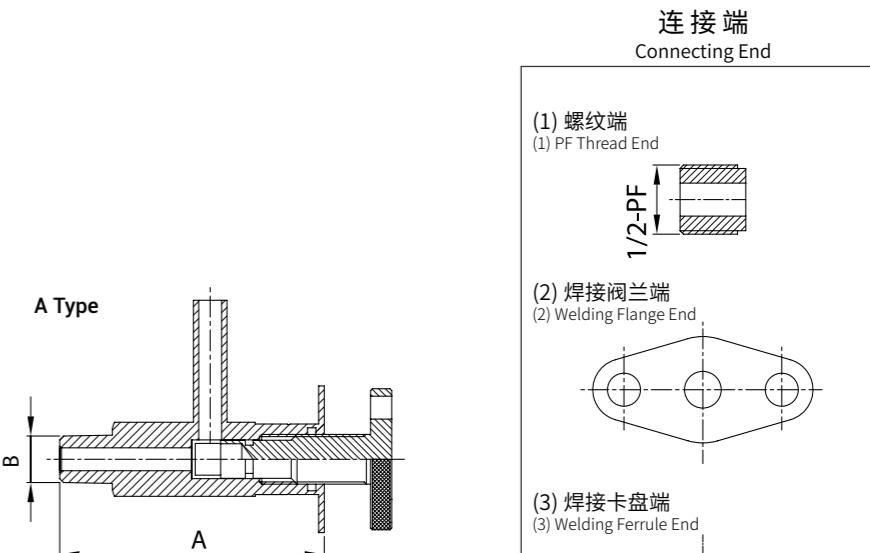

Type	A	B
16AMP	66.4	ø50.5
Ferrule	79.9	ø50.5
Male	75	1/4 NPT 3/8 NPT 1/2 NPT
Flange	81.5	60x29

卫生级阀门


Sanitary Valves

取样阀

Sample Cock Valves

C-Type 取样阀

C-Type Sample Cock Valve

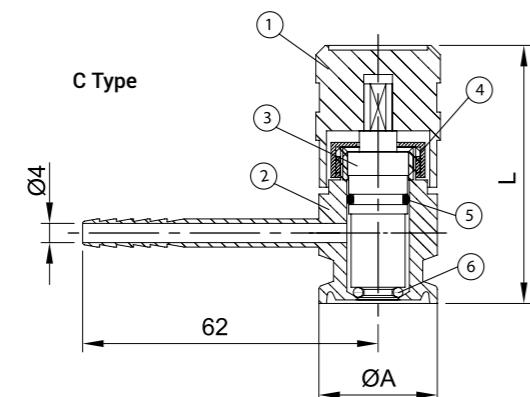

零件清单 Parts List			
Item	零件名称 Parts name	Q'TY	材质 Material
1	旋转螺母 Rotating Nut	1	POM
2	本体 Body	1	SUS304/316(L)
3	支架 Flow support	1	SUS304/316(L)
4	防松螺母 Locknut	1	SUS304/316(L)
5	O型圈 O-Ring	1	EPDM
6	O型圈 O-Ring	1	EPDM

SIZE	ØA	L
1/2"	25.2	70
1"	50.5	70

卫生级阀门


Sanitary Valves

取样阀

Sample Cock Valves


D-Type 取样阀

D-Type Sample Cock Valve

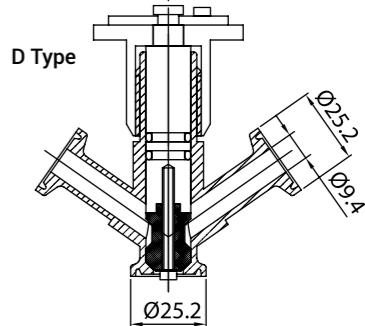



F-Type 取样阀

F-Type Sample Cock Valve



隔膜取样阀

Diaphragm Sample Valve

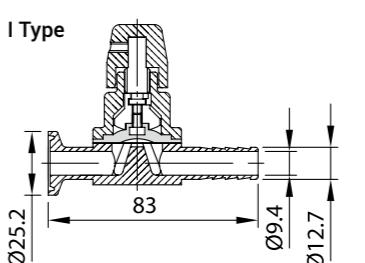

卫生级阀门

Sanitary Valves

BPE 卫生取样阀

Hygienic Sample Valves for BPE



DA Type



DB Type

■ 物料

流通面积: AISI 316L
其他钢制零件: AISI 316
阀杆: AISI 316L
流通面积垫片: EPDM/SILICON/FKM

■ 技术数据


温度范围: 全真空-10°C至+140°C(EPDM)

■ Materials

Flow area: AISI 316L
Other steel parts: AISI 316
Plug stem: AISI 316L
Gasket for flow area: EPDM/SILICON/FKM

■ Technical data

Temperature range: Full vacuum -10°C to +140°C (EPDM)

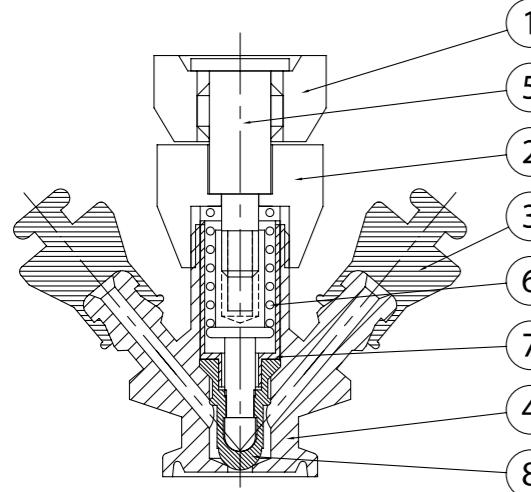

零件清单 Parts List			
Item	零件名称 Parts name	Q'TY	材质 Material
1	螺旋螺帽 Rotating Nut	1	SUS304/316(L)
2	防松螺帽 Lucknut	1	SUS304/316(L)
3	垫圈 Seal	1	EPDM
4	阀体 Body	1	SUS304/316(L)
5	流道 Flow Supports	1	SUS304/316(L)
6	弹簧 Spring	1	SUS304/316(L)
7	衬套 Bushing	1	SUS304/316(L)
8	垫圈 Seal	1	EPDM

卫生级阀门


Sanitary Valves

BPE 卫生取样阀

Hygienic Sample Valves for BPE

BPE 卫生取样阀 (螺纹)


Hygienic Sample Valve for BPE (Weld)

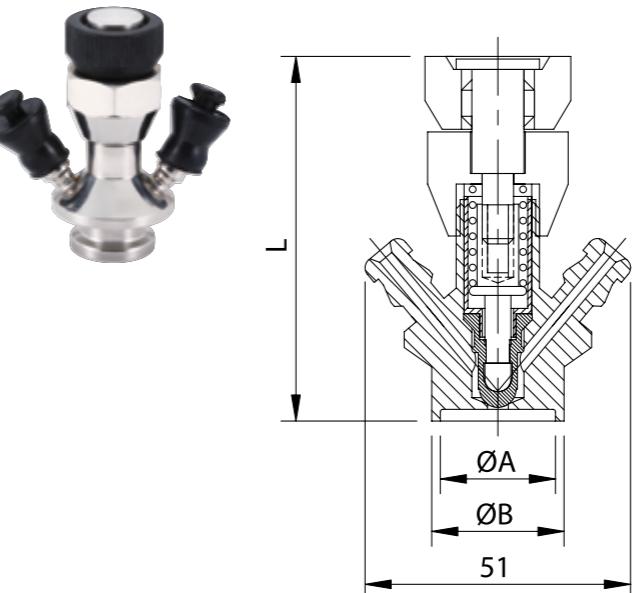

SIZE	ØA	ØB	L
1/2"	9.4	12.7	71.5
3/4"	15.75	19.05	71.5
1.0"	22.1	25.4	71.5

BPE 卫生取样阀 (卡箍)

Hygienic Sample Valve for BPE (Clamp)

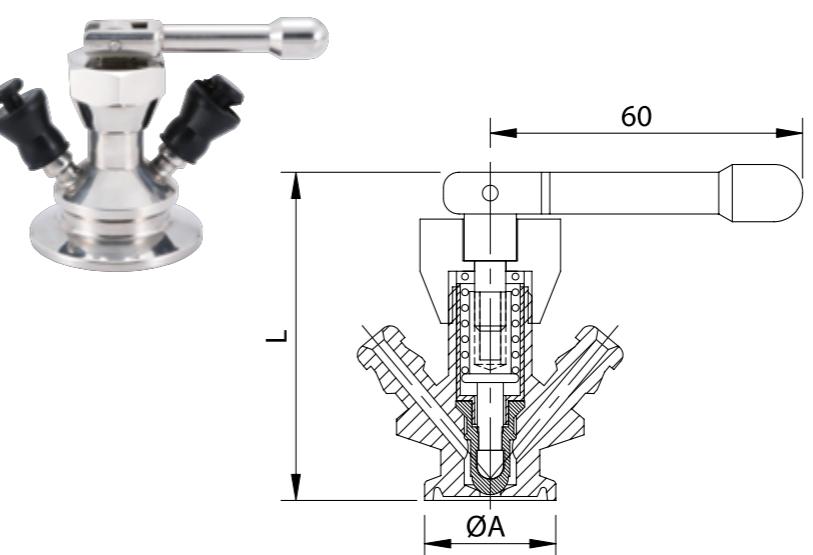

SIZE	ØA	L
A37	34	70
1/2"	25.2	70
3/4"	25.2	70
1.0"	50.5	70

隔膜阀

Diaphragm Valves



物料

本体：锻造316L
膜片：EPDM+PTFE/常开或常闭
隔膜密封可以与GEMU互换

连接处

夹式/焊式

阀体类型

直接连接(双向)/等径三通/异径三通/U通等

操作方式

常开/常闭

工作温度

隔膜：EPDM+PTFE(-10°C~150°C)

工作压力

最大：10Bar

表面

SF1: ID抛光至Ra≤0.5μm/
SF4: EP加工成Ra≤0.38μm/
ID/OD镜面抛光 & ID Ra≤0.5μm/OD喷砂处理

Materials

Body: Forged/316L
Diaphragm: EPDM+PTFE/NC or NO
The seal of Diaphragm is exchangeable with GEMU

Connection

Clamp end/Weld end

Body type

Direct connection(two way)/equal T/ reducing T/U-point...

Operation

Normal open/Normal close

Work temp

Diaphragm: EPDM+PTFE(-10°C~150°C)

Work pressure

Max: 10 Bar


Surface

SF1: ID polished to Ra≤0.5μm/
SF4: EP finished to Ra≤0.38μm/
ID/OD mirror polished & ID Ra≤0.5μm/OD sand blasted...

隔膜阀

Diaphragm Valves


■ F型结构图 / F type construction assembly drawing

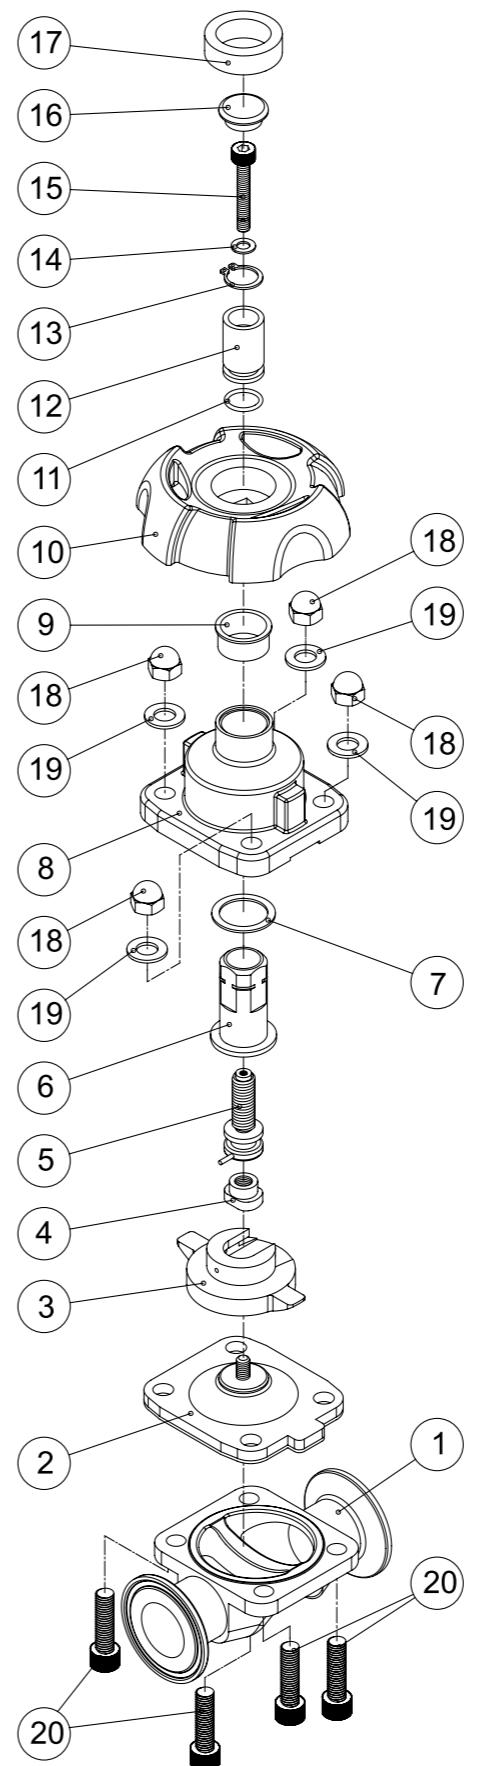

零件清单 Parts List			
Item	零件名称 Parts name	Q'TY	材质 Material
1	阀体 Body	1	SUS316L
2	垫圈 Seal	1	EPDM+PTFE
3	垫圈座 Seat	1	SUS304
4	螺丝 Screw	1	SUS304
5	螺栓 Blot	1	SUS304
6	螺栓套筒 Blot sleeve	1	SUS304
7	垫圈 Seal	1	PTFE
8	阀盖 Bonnet	1	SUS304
9	套筒 sleeve	1	PEEK
10	转向盘 Handwheel	1	EPDM+PTFE
11	O型圈 O-Ring	1	NBR
12	定位指标 Positioning index	1	MC(Blue)
13	簧环 Circlip	1	SUS304
14	垫圈 Washer	1	SUS304
15	螺丝 Screw	1	SUS304
16	盖子 Cover	1	MC(Blue)
17	侧盖 CAP	1	EPDM+PTFE
18	螺母 Nut	4	SUS304
19	垫片 Washer	4	SUS304
20	螺丝 Screw	4	SUS304

手动两通隔膜阀

Manual Diaphragm Valve 2 WAY

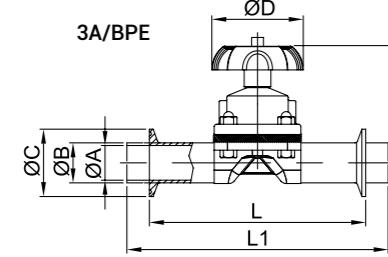

SIZE	1/2"	3/4"	1"	1.5"	2"
ØA	9.4	15.75	22.1	34.8	47.5
ØB	12.7	19.05	25.4	38.1	50.8
ØC-3A	25	25	50.5	50.5	64
ØC-BPE	25	25	25/50.39	50.39	63.91
ØD	60	60	95	95	118
ØE	60	60	85	85	133
F1	122	122	212	217	315
F2	131	131	225	232	333
G1	74	74	100	119	135
G2	83	83	113	134	153
L	88.9	101.6	114.3	139.7	158.8
L1	124	135	141.2	168.4	190.5

桶底阀

Non-Return Valves

蝶阀

Butterfly Valves

止回阀

Non-Return Valves

球阀

Ball Valves

取样阀

Sample Cock Valves

隔膜阀

Diaphragm Valves

其他阀

Other Valves

特殊阀


Special Valves

隔膜阀

Diaphragm Valves

手动三通隔膜阀 T型

Manual Diaphragm Valve T-Type 3 WAY

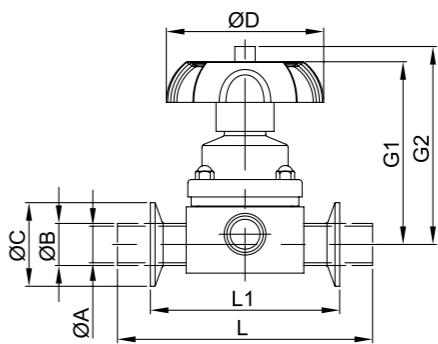

桶底阀

Tank Valves

蝶阀

Butterfly Valves

止回阀

Non-Return Valves

球阀

Ball Valves

取样阀

Sample Cock Valves

隔膜阀

Diaphragm Valves

其他阀

Other Valves

特殊阀

Special Valves


SIZE	1/2"x1/2"	1/2"x3/4"	1/2"x1"	1/2"x1.5"	1/2"x2"	3/4"x3/4"	3/4"x1"	3/4"x1.5"	3/4"x2"	1"x1"	1"x1.5"	1"x2"	1.5"x1.5"	1.5"x2"	2"x2"	
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5	
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	38.1	50.8	50.8	
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64	
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	50.5	50.5	50.5	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	113	134	134	153
H	—	6.18	13.2	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75	28.75
L	139.7	139.7	154	153.6	153.6	139.7	153.6	153.6	153.6	172.6	172.6	172.6	172.6	197.6	197.6	211.6
L1	88.9	88.9	114.3	114.3	114.3	88.9	114.3	114.3	114.3	114.3	114.3	114.3	114.3	139.7	139.7	158.8
M	69.4	72.58	75.75	82.1	88.45	72.58	75.75	82.1	88.45	86.65	93	99.35	105	111.35	123.75	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	70.6	74.6	80.95	86.6	92.95	98.95	98.95

隔膜阀

Diaphragm Valves

手动隔膜3通/U型弯阀

Manual Diaphragm Valve 3 WAY/U-Bend Valve

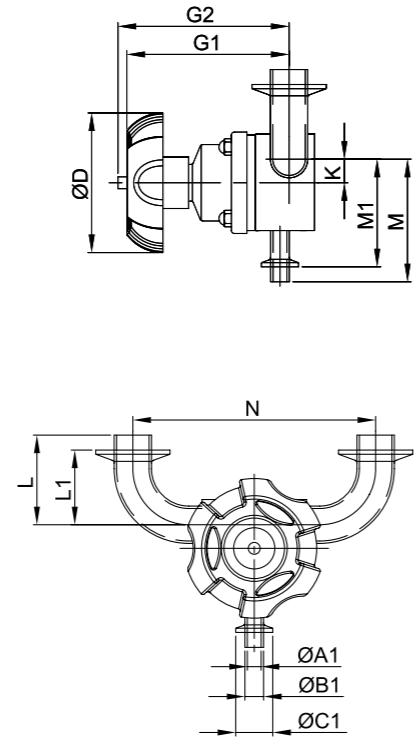


其它阀

Other Valves

2通和3通考克

2 WAY & 3WAY Plug Valve

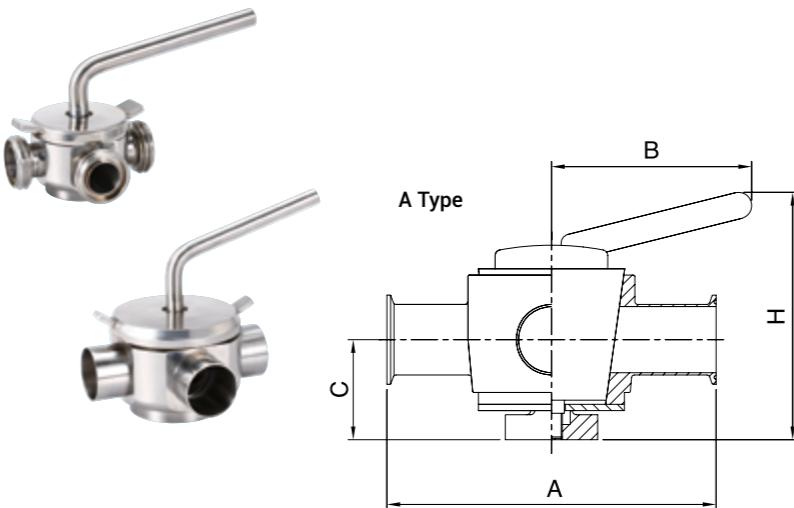

焊 / 夹 / 外螺纹 / 法兰式

SIZE (Tube O.D.)	Weld A	Clamp A	B	C	H
1"	184.2	115.9	117.0	58.3	128.4
1.5"	198.4	147.6	142.7	61.0	164.4
2"	223.8	173.0	144.2	72.4	178.0
2.5"	260.4	209.6	150.6	86.2	223.4
3"	290.5	239.7	180.7	90.6	241.4


SIZE	1/2"x1/2"	3/4"x1/2"	1"x1/2"	1.5"x1/2"	2"x1/2"	3/4"x3/4"	1"x3/4"	1.5"x3/4"	2"x3/4"	1"x1"	1.5"x1"	2"x1"	1.5"x1.5"	2"x1.5"	2"x2"
ØA	9.4	15.75	22.1	34.8	47.5	15.75	22.1	34.8	47.5	22.1	34.8	47.5	34.8	47.5	47.5
ØB	12.7	19.05	25.4	38.1	50.8	19.05	25.4	38.1	50.8	25.4	38.1	50.8	50.8	50.8	50.8
ØC	25	25	50.5	50.5	64	25	50.5	50.5	64	50.5	50.5	64	50.5	64	64
ØA1	9.4	9.4	9.4	9.4	9.4	15.75	15.75	15.75	15.75	22.1	22.1	22.1	34.8	34.8	47.5
ØB1	12.7	12.7	12.7	12.7	12.7	19.05	19.05	19.05	19.05	25.4	25.4	25.4	38.1	38.1	50.8
ØC1	25	25	25	25	25	25	25	25	25	50.5	50.5	50.5	64	64	64
ØD	60	60	60	60	60	60	60	60	60	95	95	95	95	95	118
ØE	60	60	60	60	60	60	60	60	60	85	85	85	85	85	133
F1	122	122	122	122	122	122	122	122	122	212	212	212	217	217	315
F2	131	131	131	131	131	131	131	131	131	225	225	225	232	232	333
G1	74	74	74	74	74	74	74	74	74	100	100	100	119	119	135
G2	83	83	83	83	83	83	83	83	83	113	113	113	134	134	153
H	—	6.18	13.44	19.5	19.5	4.5	10.7	17.5	17.5	6.2	14.5	18.4	6.2	13.7	—
K	6.8	9.98	13.15	19.5	25.85	9.98	13.15	19.5	25.85	16.05	22.4	28.75	22.4	28.75	28.75
L	57.15	66.68	76.2	95.3	120.7	66.68	76.2	95.3	120.7	76.2	95.3	120.7	95.3	120.7	120.7
L1	31.75	41.25	50.8	69.9	88.9	41.28	50.8	69.9	88.9	50.8	69.9	88.9	69.9	88.9	88.9
M	69.4	72.85	75.75	82.1	88.45	72.58	72.75	82.1	88.45	70.6	93	99.35	105	111.35	123.75
M1	51	54.18	57.35	63.7	70.05	54.18	57.35	63.7	70.05	68.25	74.6	80.95	86.6	92.95	98.95
N	101.7	120.7	165.1	203.3	241.3	120.7	165.1	203.3	241.3	165.1	203.3	241.3	228.7	266.7	285.8

其它阀

Other Valves

2通和3通考克

2 WAY & 3WAY Plug Valve

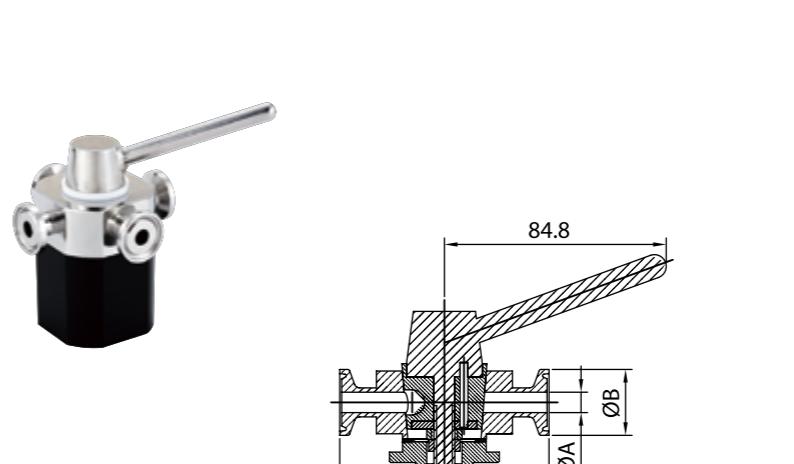

SIZE	ØA	ØB	L
3/8"	7.8	25.2	80
1/2"	9.4	25.2	80
3/4"	15.8	25.2	80

特殊阀的种类


Kinds of Special Valves

- 材质: SUS304/SUS316L; 锻造 / 实心棒材阀体
- 表面: 抛光、电抛光; 内径 Ra < 0.8μm 或 0.4μm
- 可根据您的要求设计

- Material: SUS304/SUS316L; Forged/Solid Bar Body.
- Surface: Polished, Electric Polished; ID Ra < 0.8μm/0.4μm.
- Can be made by your requirement design.

泄压阀

Relief Valve

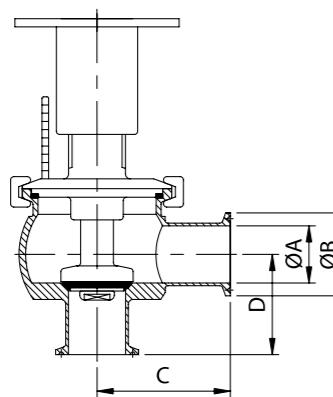


为了保证您的安全 (工作压力 0.1~7Kgs/cm²)。
For your safety poessure (Working pressure 0.1~7kgs/cm²).

SIZE	ØA	ØB	C	D
1.0"	22.2	50.5	63.5	63.5
1.5"	34.8	50.5	69.85	69.85
2.0"	47.5	64	88.9	88.9
2.5"	60.2	77.5	88.9	88.9
3.0"	72.9	91	95.25	95.25

排气阀

Air Release Valve

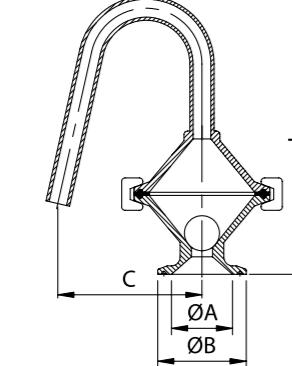


缓解储罐或管道上的过载气压。
Relief out over-load Air pressure on your Tank or Pipe Line.

SIZE	ØA	ØB	C	L
1.0"	22.1	50.5	82	158
1.5"	34.8	50.5	82	158
2.0"	47.5	64	82	158

放空阀

Air Blow Valve



用于管道多余气体排出。
For Air Clean out the pipe Line.

SIZE	ØA	L
1.0"	50.5	55
1.5"	50.5	55
2.0"	64	55

ACCESSORIES 配件类



日嘉卫生金属(嘉兴)有限公司
RI JIA SANITARY METAL(JIAXING)CO.,LTD.

高洁净视镜 Hygienic Sight Glasses



- 玻璃: 耐高压, 高洁净玻璃, 最大工作压力为 10Bar
- 本体: 304 316L 锻压本体具有 3A, DIN, SMS, RJT, IDF, 螺纹, 焊接, 夹接等连接方式
- 连接杆: 全不锈钢材质
- 垫圈: EPDM, SILICONE 和 FKM

- Glass: Clean, High Press Pyrex Glass. Max Work 10 bar. Can be changeable
- Body: SUS304, 316L Precision Machined Body With Width Connection End.3A, DIN, SMS, RJT, IDF Male/Male Weld and Female End
- Screw Blot: Full Stainless Steel
- Seal: EPDM, SILICONE and FKM

玻璃成分


Pyrex Glass date

Content	SiO ₂	Al ₂ O ₃	Fe ₂ O ₃	B ₂ O ₃	Na ₂ O	K ₂ O
%	80.9	2.3	0.03	12.7	4.0	0.04


物理性质

Physical Properties

弹性模量 Young's module	6.4x10 ⁵ kg/cm ³
泊松比 Poisson's ratio	0.20
剪切模量 Shear modulus	2.7x10 ⁵ kg/cm ²
努氏硬度 (100g) Knoop hardness (100g)	418KHN
弯曲现象 Bending strength	4~7x10 ⁵ kg/cm ²
设计应力 (安全系数) Design stress (Safety factor)	67 kg/cm ²

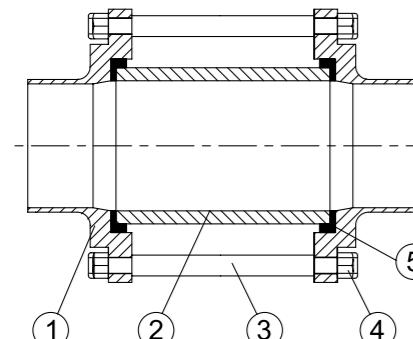

- | | |
|--------|-----------------------------|
| ① 本体 | ① Body |
| ② 高压玻璃 | ② High Pressure Clean Glass |
| ③ 连接杆 | ③ Screw Blot |
| ④ 尼龙螺母 | ④ Nylon Lock Nut |
| ⑤ 垫圈 | ⑤ Seal |

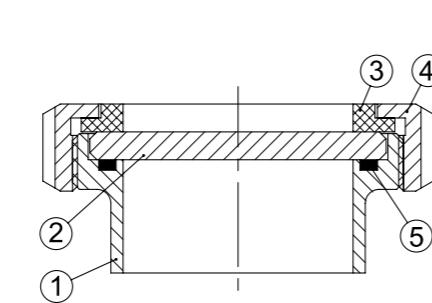




- | | |
|---------|-----------------------------|
| ① 本体 | ① Body |
| ② 高压玻璃 | ② High Pressure Clean Glass |
| ③ 铁氟龙油封 | ③ Screw Blot |
| ④ 螺母 | ④ Nylon Lock Nut |
| ⑤ 垫圈 | ⑤ Seal |

仅焊接端!
With weld end only!

高洁净视镜 Hygienic Sight Glasses

夹式视镜




3A/BS Clamp End Sight Glass

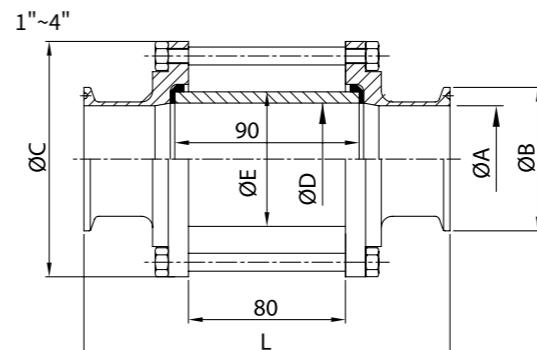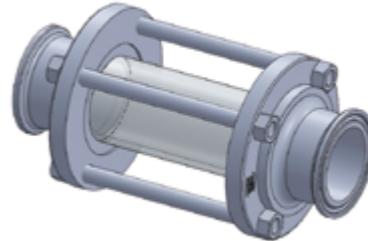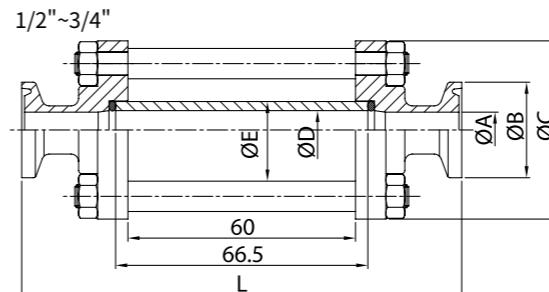

SIZE	ØA	ØB	ØC	ØD	ØE	L
1/2"	9.4	25.2	47	10.2	15	116
3/4"	15.75	25.2	47	17	22	143
1.0"	22.1	50.5	79	26	32	150
1.5"	34.8	50.5	85	34	40	156
2.0"	47.5	64	105	50	60	160
2.5"	60.2	77.5	112	65	75	162
3.0"	72.9	91	125	75.4	85	167
4.0"	97.6	119	157	100	110	172

焊式视镜

3A/BS Weld End Sight Glass

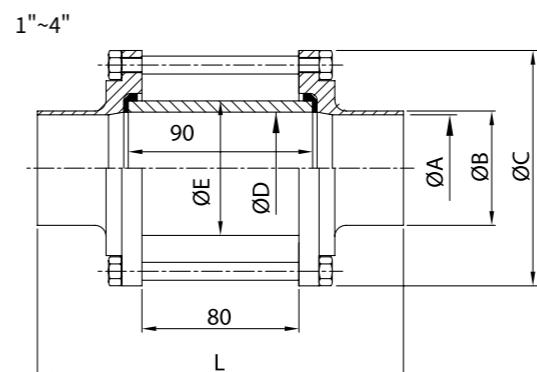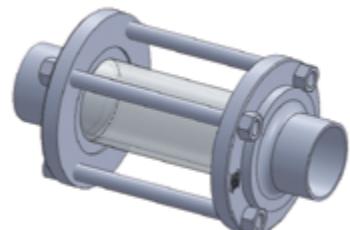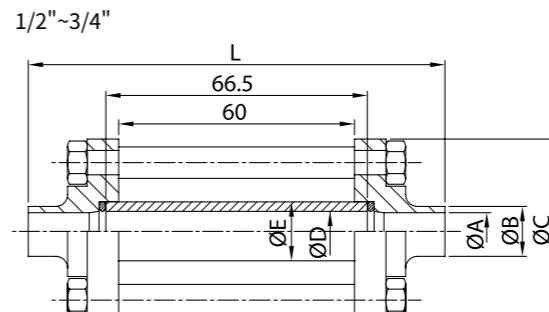

SIZE	ØA	ØB	ØC	ØD	ØE	L
1/2"	9.4	12.7	47	10.2	15	106
3/4"	15.75	19.05	47	17	22	106
1.0"	22.1	25.4	79	26	32	148
1.5"	34.8	38.1	85	34	40	156
2.0"	47.5	50.8	105	50	60	160
2.5"	60.2	63.5	112	65	75	160
3.0"	72.9	76.2	125	75.4	85	162
4.0"	97.6	101.6	157	100	110	167

過濾器 S-Trainers

■ 材質: SUS304 / SUS316L

■ 目數: 20~400

■ 孔徑: 1~10(mm)

■ 壓力 (MPa): 0.05~0.2

■ 類型: 焊式 / 夾式 / 外螺紋式 / 內螺母紋

■ Material: SUS304 / SUS316L



■ Mesh: 20~400

■ Aperture Size: 1~10(mm)

■ P.D. Press(Mpa): 0.05~0.2


■ Types: Weld end/Clamp end/Male end/Female end

I型過濾器 (直進直出) Strainer Inline Type (I)

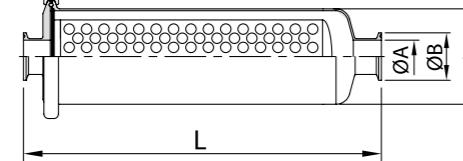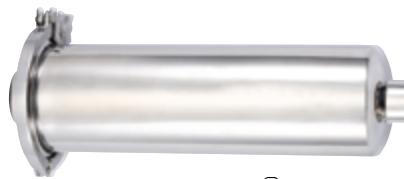

SIZE	ØA	ØB	ØC	L
1.0"	22.2	50.5	101.6	380
1.5"	34.8	50.5	101.6	380
2.0"	47.5	64	101.6	380
2.5"	60.2	77.5	101.6	450
3.0"	72.9	91	101.6	550


L型過濾器 (側進直出) Strainer Side Outlet Type (L)

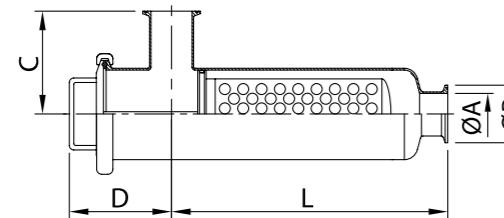

SIZE	ØA	ØB	C	D	L
1"	22.1	50.5	104.8	110	310
1.5"	34.8	50.5	104.8	110	310
2"	47.5	64	114.3	110	310
2.5"	60.2	77.5	108	110	410
3"	72.9	91	108	110	490


過濾器 S-Trainers

Y型過濾器 Y-type strainer

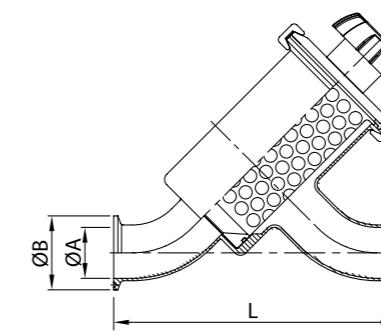

SIZE	ØA	ØB	L
1.0"	22.1	50.5	155.65
1.5"	34.8	50.5	192.63
2.0"	47.5	64	208.17
2.5"	60.2	77.5	271.26
3.0"	72.9	91	300.83

S型過濾器 S-type strainer

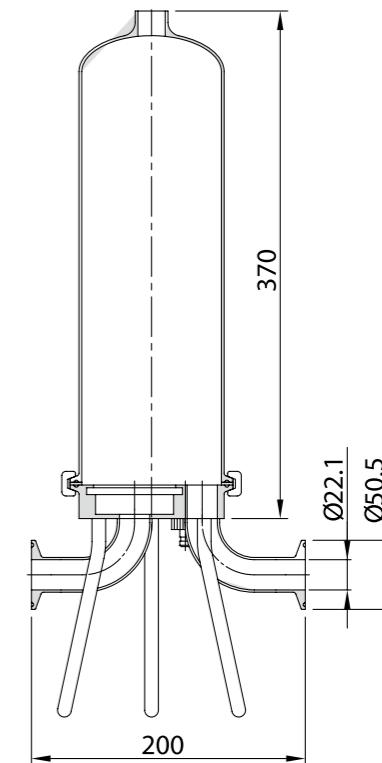

OEM 系列

OEM Series

滤膜过滤器

(Mf) Membrane Filter

**微型过滤器**


Mini-filter

**灌装阀**

Filling Valve

**蒸汽阀**

Steam Trap

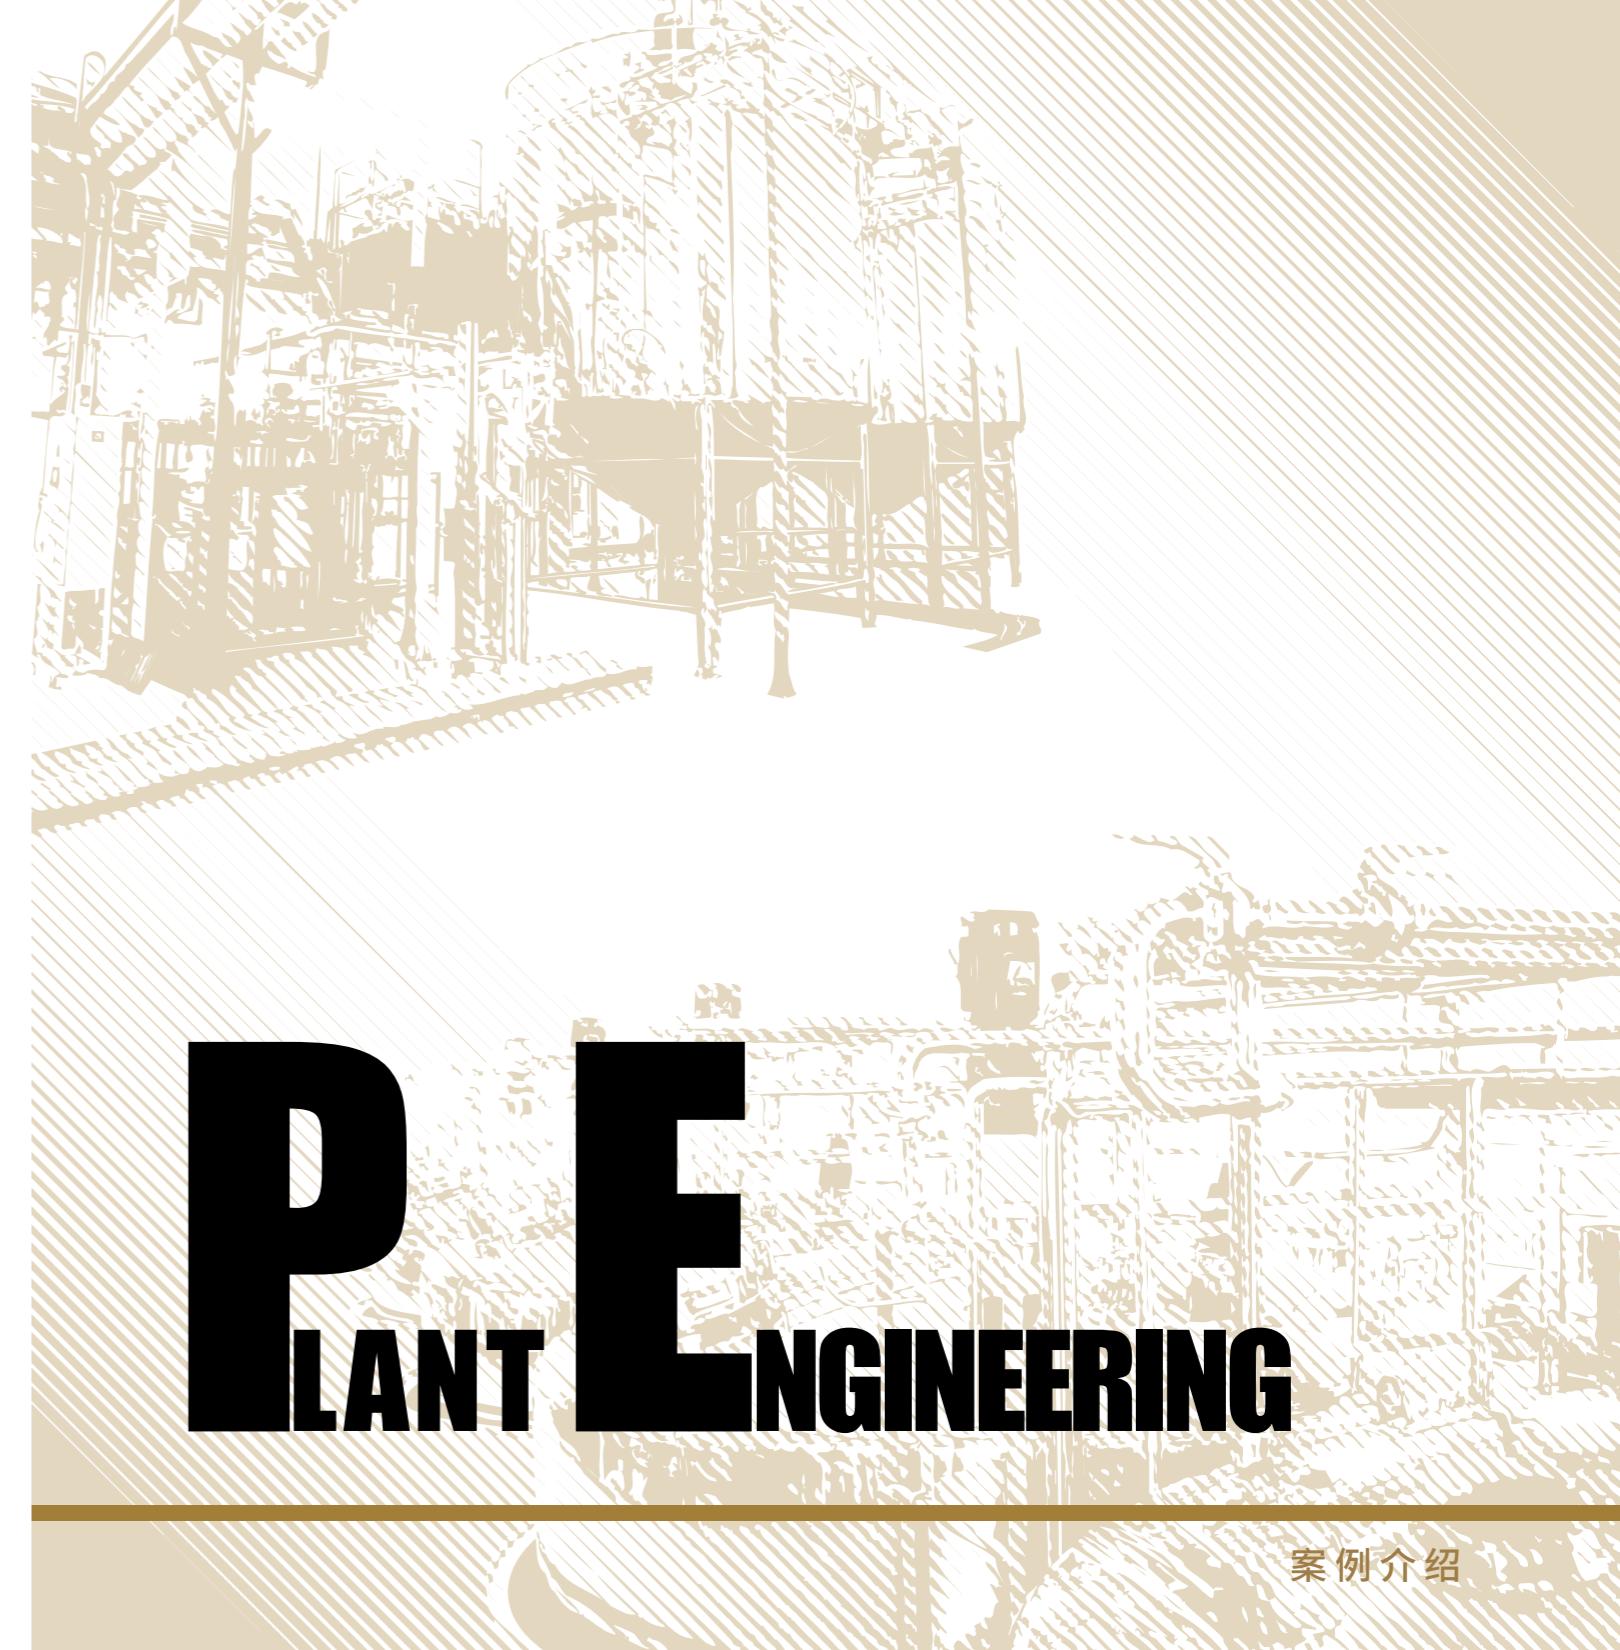

案例介绍 目录**Plant Engineering INDEX**

盒装豆腐制造设备
Packed Tofu Beancurd Plant

105

浓缩苹果汁制造设备
Apple Juice Concentrate Plant

106

茶饮料制造设备
Tea Plant

107

风味饮料制造设备
Flavored Water Plant

108

健康饮料制造设备
Health Drink Plant


109

调味品制造设备
Spice Manufacturing Plant

110

药液混合设备
Liquid Medicine Plant

111

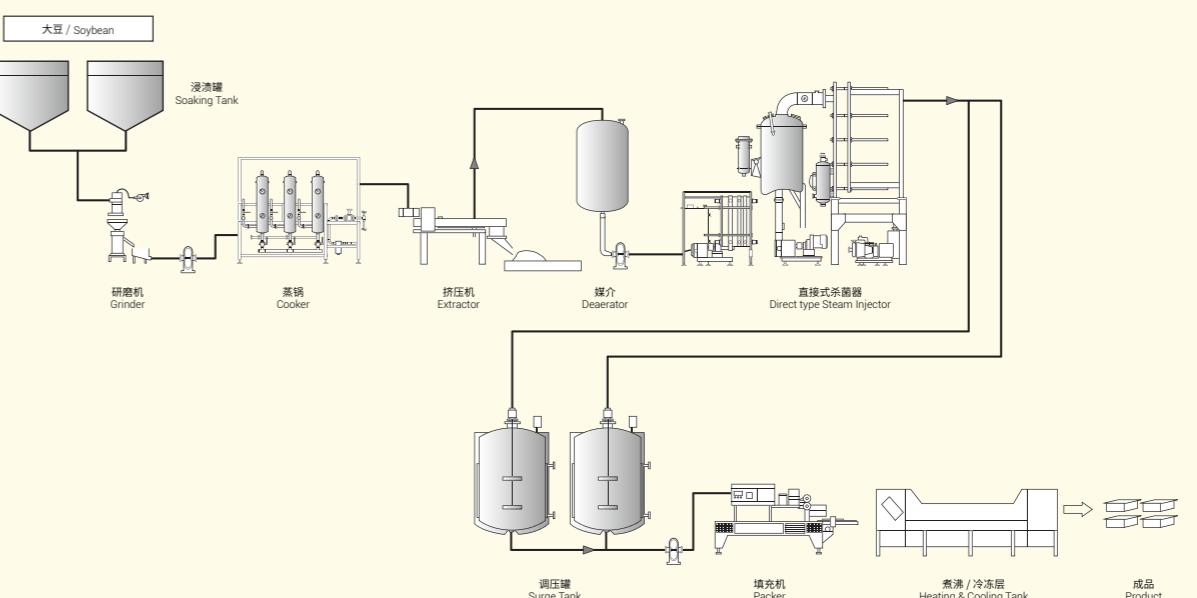盒装豆腐制造设备**Packed Tofu beancurd plant**

车间按颜色划分区域
Workshop zoned by color



研磨、蒸煮设备
Grinder & Cooker



萃取设备
Extractor



大豆浸泡设备
Soybean Soaking tanks



填充、包装设备
Packing & Sealing System

■ 设计案例

- 产 品 名 称：盒装豆腐
- 大 豆 加 工 量：600公斤/小时
- 豆 浆 糖 度：13~15' Bx

■ 设备优势

- 设备设计中不需要消泡剂。
- 采用直接式杀菌装置，延长了持续运行时间。

■ Design example

- Product : Packed Tofu
- Soybean volume to be processed : 600kg/Hr
- Soymilk sugar degree : 13~15' Bx

■ System features

- Defoamer is not needed in the line.
- Adoption of direct type steam injector enables to have continuous and longer operation time.

浓缩苹果汁制造设备

Apple juice concentrate plant

盒装豆腐制造设备

浓縮苹果汁制造设备


茶饮料制造设备

风味饮料制造设备

健康饮料制造设备

调味品制造设备

药液混合设备

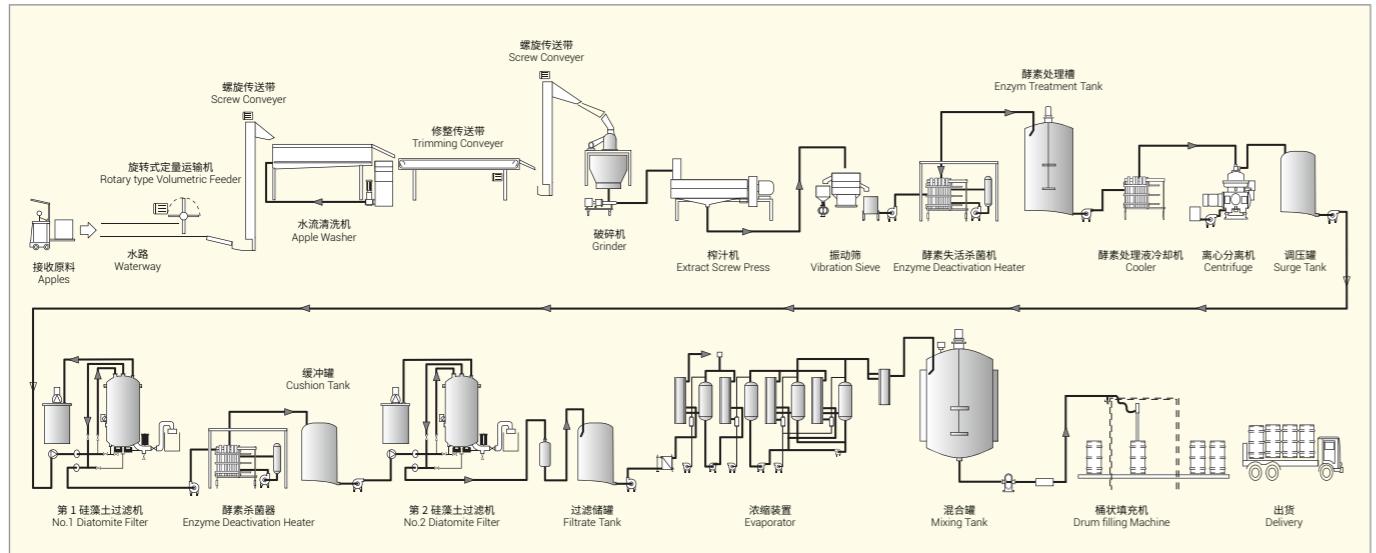堆料场(苹果)
Raw Material (apple)预处理、清洗设备
Pre-treatment, Cleaning equipment萃取装置
Extraction Units

■ 设计案例

- 产 品 名 称：浓缩果汁
- 水 果 加 工 量：10吨/小时
- 浓 缩 前 的 果 汁 糖 度：7.4° Bx
- 浓 缩 后 的 果 汁 糖 度：7.1° Bx


■ 设备优势

水流式的清洁设备可以提高清洁效果。
该系统可以延长失活杀菌的持续运行时间。

酵素处理槽
Enzyme Treatment Tanks混合设备
Blending Unit填充设备
Fitting Machine

茶饮料制造设备

Tea plant

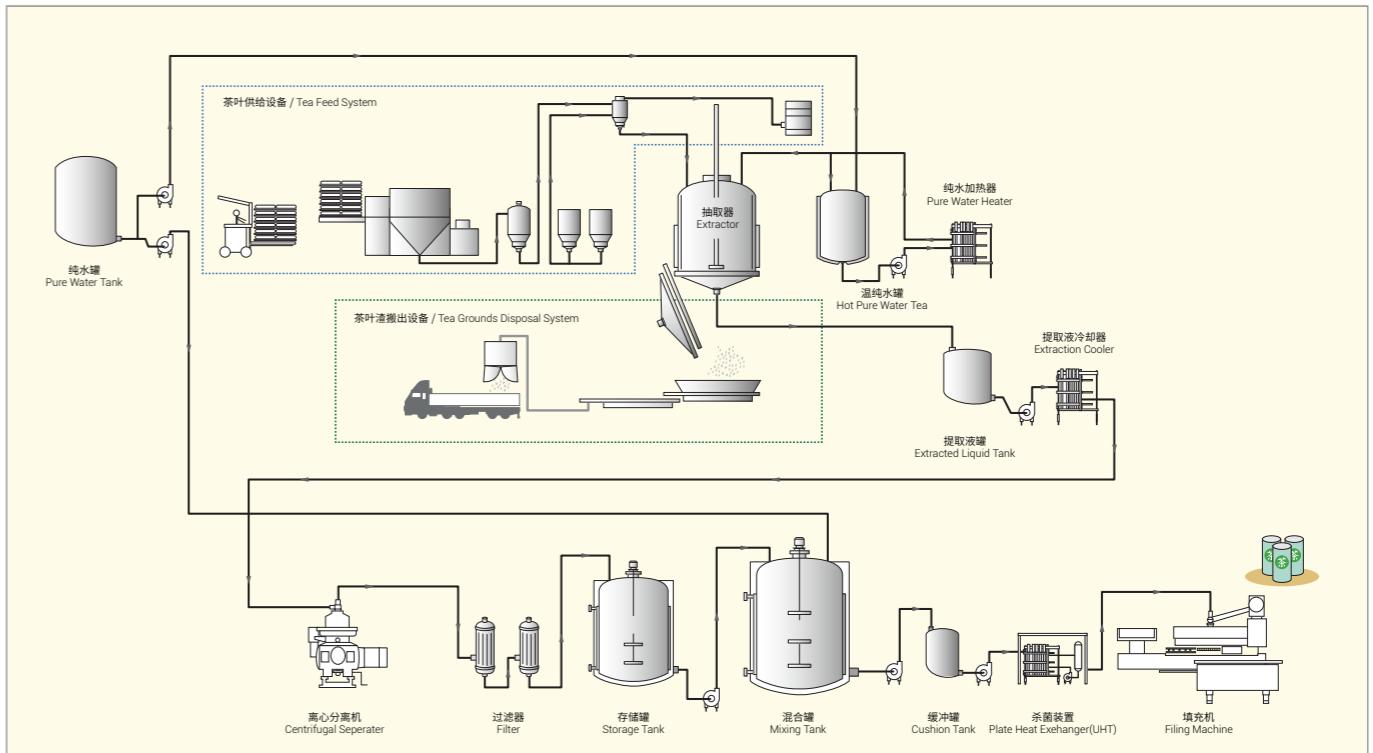混合罐
Mixing TankCIP 装置
Cip Unit纯净水装置
Pure Water Unit温纯水装置
Hot Pure Water Tea提取器
Extractor

■ 设计案例

- 产 品 名 称：茶
- 茶 叶 加 工 量：18吨/小时
- 提 取 物 浓 度：1.0°Bx
- 产 品 浓 度：0.22°Bx

■ 设备优势

本设备通过输入提取液的分析结果，可自动进行混合。

■ Design example


- Product : Fruit juice concentrate
- Volume of processed fruit : 10 ton/hr
- Fruit juice sugar degree before evaporation : 7.4' Bx
- Fruit juice sugar degree after evaporation : 7.1' Bx

■ System features

This system can take in analytical data of extract for blending automatically.

风味饮料制造设备

Flavored Water Plant

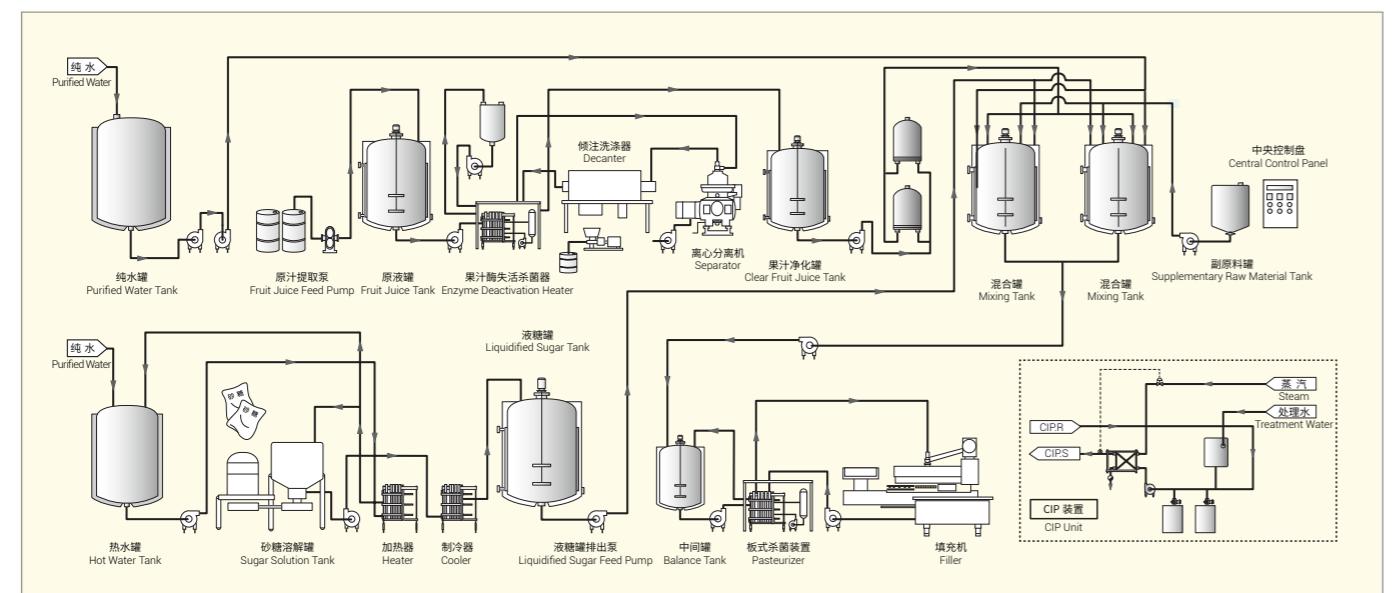

风味饮料制造设备
Flavored Water Plant



果汁过滤与净化装置
Fruit Juice Filtration and Purification Unit



CIP 装置
Cip Unit



杀菌装置
Pesteurizer

■ 设计案例

·产 品 名 称：风味饮料
·制 造 量：7m³/时

■ 设备优势

多品种对应型设备。

■ Design example


·Product : Flavored Water
·Volume of product : 7m³/Hr

■ System features

Equipment to cope with various kinds.

健康饮料制造设备

Health Drink Plant

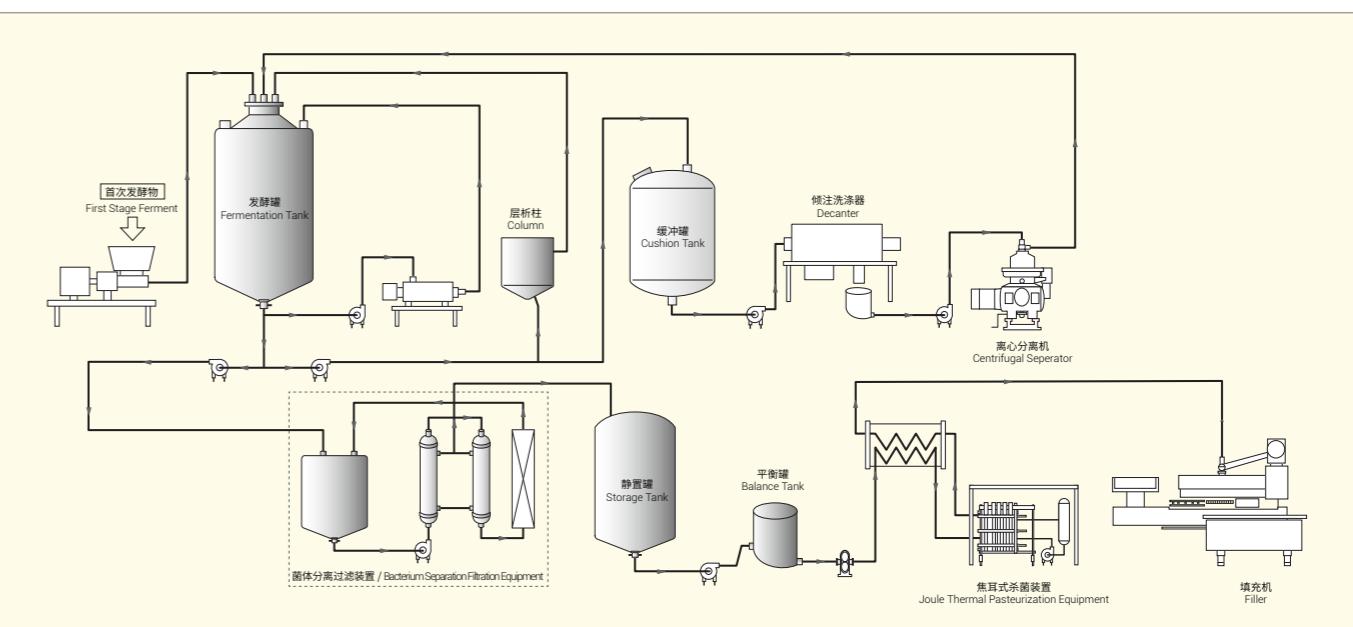

发酵罐
Fermentation Tank



过滤装置
Filtration Equipment



焦耳热巴氏灭菌设备
Joule Thermal Pasteurization Equipment



填充设备
Fitting equipment

■ 设计案例

·产 品 名 称：健康饮料
·充 填 量：750升/时

■ 设备优势

系统利用焦耳热巴氏灭菌设备，以尽量减少热能对产品的损害。

■ Design example

·Product : Flavored Water
·Volume of Filling : 75L/Hr

■ System features

System utilizes Joule thermal pasteurization equipment to minimize damage on product from heat.

调味品制造设备

Spice Manufacturing Plant

盒装豆腐制造设备
Packed Tofu/beancurd plant

浓缩苹果汁制造设备
Apple juice concentrate plant


茶饮料制造设备
Tea plant

风味饮料制造设备
Flavored Water Plant

健康饮料制造设备
Health Drink Plant

调味品制造设备
Spice Manufacturing Plant

药液混合设备
Liquid Medicine Plant

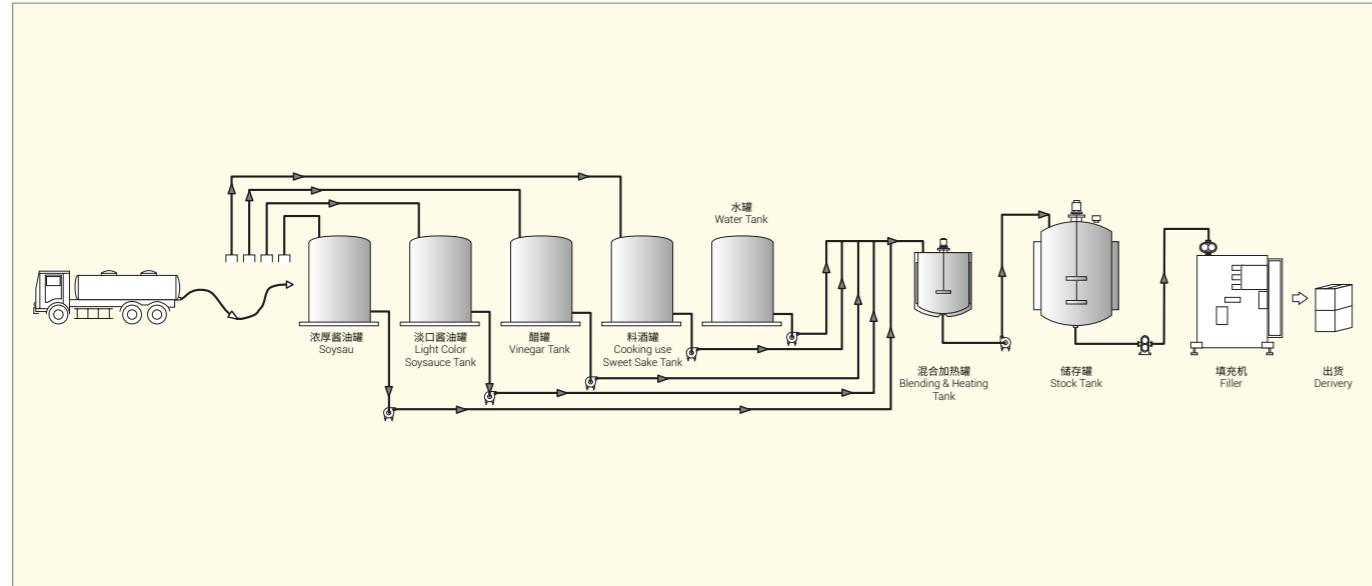

原料接收设备
Raw material receiving facilities



混合加热杀菌罐
Blending & Heating Tank



存储罐
Stock tanks



填充室
Fitting room

■ 设计案例

- 产 品 名 称：饺子酱 / 豆豉
- 大 豆 加 工 量：500公斤/批次

■ 设备优势

该系统不需要配备传统填充设备上所需的料斗。

■ Design example

- Product : Dumpling sauce / Fermented soybeans sauce
- Volume of processed raw soybeans : 500Kg/Batch

■ System features

This system does not need hopper,usually equipped on conventional systems.

药液混合设备

Liquid Medicine Plant

盒装豆腐制造设备
Packed Tofu/beancurd plant

浓缩苹果汁制造设备
Apple juice concentrate plant


茶饮料制造设备
Tea plant

风味饮料制造设备
Flavored Water Plant

健康饮料制造设备
Health Drink Plant

调味品制造设备
Spice Manufacturing Plant

药液混合设备
Liquid Medicine Plant

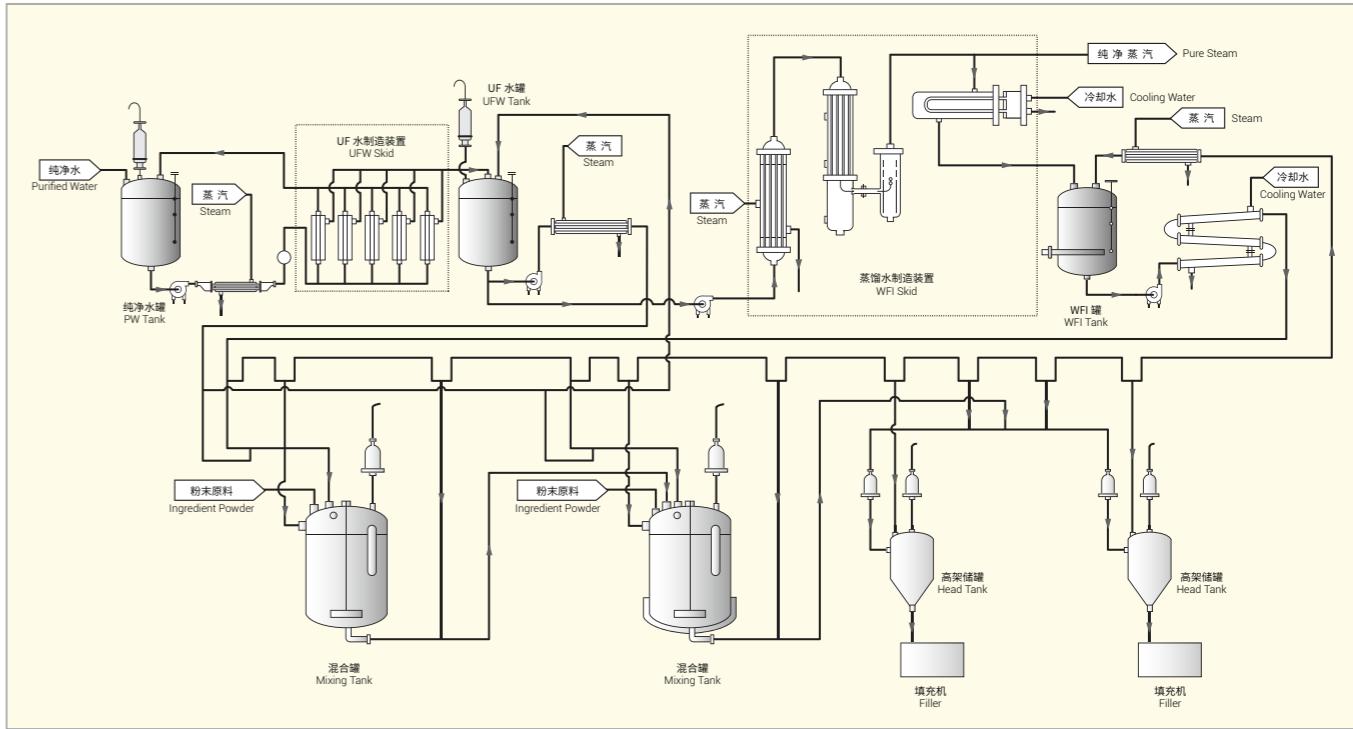

自动化药液生产系统
Automated Liquid Medicine Production System



纯净水生产装置
Purified Water Production Unit



纯蒸汽发生装置
Pure Steam Generator



药液混合罐
Syrup Mixing Tank

■ 设计案例

- 产 品 名 称：注射液
- 准 备 量：200升/批

■ 设备优势

经过验证的自动化CIP/SIP系统。
采用电解抛光，实现了高清洁性和可靠再现性。

■ Design example

- Product : Injection drug
- Volume of prepare : 200L/Lot

■ System features

Properly validated and Automated CIP/SIP System.
High washability by electropolishing and reliable reproducibility are realized.